


BROOKHAVEN NATIONAL LABORATORY Safety & Health Services Division INDUSTRIAL HYGIENE GROUP Standard Operating Procedure	NUMBER IH75135
	REVISION FINAL Rev 3
SUBJECT: POLICY AND FIELD PROCEDURE:	DATE 08-24-05
Mercury Spills- Area Clearance Testing	PAGE 1 OF 9

Content

- 1.0 Purpose/Scope**
- 2.0 Responsibilities**
- 3.0 Definitions**
- 4.0 Prerequisites**
- 5.0 Precautions**
- 6.0 Procedure**
- 7.0 Implementation & Training**
- 8.0 References**
- 9.0 Attachments**
- 10.0 Documentation**

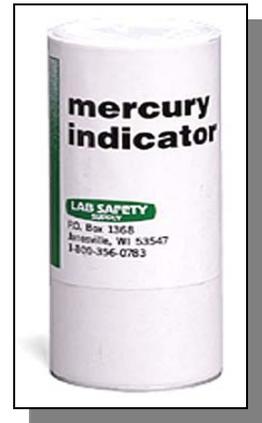

1.0 Purpose/Scope This procedure documents the BNL building re-occupancy testing procedure and clearance criteria for spills of elemental mercury in indoor locations. It is used after cleanup with HEPA filtration and/or mercury adsorbents. When used in conjunction with SHSD IH75530 for the Jerome 431X direct reading mercury analyzer and the application of mercury indicating powder, field testers can achieve accurate results to release an area for re-occupancy by building occupants.

This procedure is not intended for use in measuring employee exposure levels during routine or emergency situations. Use SHSD Procedure IH75140 for quantifying employee exposure levels and determining compliance with occupational exposure limits.

This procedure is not intended to measure the environmental consequences of releases or determine the status of environmental compliance release of the area.

2.0 Responsibilities This procedure will be implemented through the SHSD Industrial Hygiene Group, RCD Facility Support Group, or other BNL organization that has personnel qualified as per this SOP. Only persons who thoroughly understand this procedure and are competent to operate the detection equipment should conduct this testing.

BROOKHAVEN NATIONAL LABORATORY Safety & Health Services Division INDUSTRIAL HYGIENE GROUP Standard Operating Procedure	NUMBER IH75135
	REVISION FINAL Rev 3
SUBJECT: POLICY AND FIELD PROCEDURE:	DATE 08-24-05
Mercury Spills- Area Clearance Testing	PAGE 2 OF 9

3.0 Definitions

Direct Reading Meter or Instrument: An electronic meter with a sensor that detects mercury. The meter presents a real-time (instantaneous) display in concentration of the chemical sensed by the detector. An indicator tube, specific for mercury, and calibrated sampling pump can also serve as a direct reading instrument.

Indicating Powder: A commercial powder containing cuprous iodide, such as J.T.Baker Product Number 4509-01, that indicates the presence of droplets of mercury as a color change in the powder.

Spill: An unplanned release of mercury into the work environment.

4.0 Prerequisites

4.1 Prior to testing, the detection equipment must meet the requirements of its BNL method and manufacturer recommendations.

4.2 Hazard Assessment of area:

4.2.1 The task of using a direct reading meter in itself does not pose significant employee health risks. But by its very nature, this SOP may be performed in areas with mercury contamination. Do not perform sampling until a competent individual has assessed the hazards of the area.

4.2.2 Handling the indicator powder is hazardous and protective equipment must be used.

4.3 **Personal Protective Equipment:** Appropriate personal protective equipment to protect the person collecting the sample and handling the indicator powder and working around spilled mercury are:

- **Hand:** Use disposable gloves. Exam-style, splash gloves are acceptable. Acceptable elastomers are: Nitrile, PVC, and Natural Rubber. Remove and dispose of the gloves immediately after spreading the powder. Don a second pair of gloves to further handle equipment.
- **Body:** If contact of the body with contaminated surfaces is anticipated, a disposable suit should be used. Acceptable CPC materials include: Tyvek®, KleenGuard®, and cotton. Disposable garments must be discarded as mercury

BROOKHAVEN NATIONAL LABORATORY Safety & Health Services Division INDUSTRIAL HYGIENE GROUP Standard Operating Procedure	NUMBER IH75135
	REVISION FINAL Rev 3
SUBJECT: POLICY AND FIELD PROCEDURE: Mercury Spills- Area Clearance Testing	DATE 08-24-05
	PAGE 3 OF 9

waste if contact with contamination has occurred. If personal clothing items become contaminated, they must be surrendered for BNL cleaning or disposal.

- **Foot:** If contact of the feet is anticipated with contaminated surfaces, disposable shoe coverings, boots or booties should be used. Acceptable CPC material include: Tyvek®, KleenGuard®, and rubber. If personal shoes become contaminated, they must be surrendered for BNL cleaning or disposal.
- **Respiratory:** Under normal use, respiratory protection is not required. If mercury, in the area exceed (as indicated by the direct reading meter) or are likely to exceed the OSHA or ACGIH standards, respirators are required. A half face or full face APR or PAPR respirator with mercury cartridge or an air line respirator may be used up to the assigned protection factor listed in the BNL's Respiratory Protection Selection and Issuance SOPs.
- **Eye:** Safety Glasses with side shields are required in all laboratories, construction, and general industry work areas. If exposure is above the Occupational Exposure Limit (PEL/TLV), vapor-proof goggles or full-face respirator must be used.

4.4 **Work Planning:** All requirements of work permits and work planning system reviews must be met in performing this procedure.

4.5 **Environmental Impact and Waste Disposal:** Direct Reading meters do not have adverse impact on the environment or create waste for disposal. Indicator powders are considered hazardous waste and must be handled, transported and disposed of in accordance with BNL Environmental Waste Management Services Division (EWMSD) requirements.

5.0 Precautions

5.1 Verify the testing personnel will not be exposed to hazardous airborne levels of the mercury by testing the highest probability source first. Test all sources in a manner that does not place the tester's breathing zone in vicinity with a suspected spill source, i.e. approach with meter in front of the employee. Move slowly to allow the meter to respond to mercury vapors. Use appropriate respiratory protection if indicated by the airborne vapor levels. The appropriate respiratory protection equipment used must be approved by the RCD Facility Support Group or SHSD IH Group.

BROOKHAVEN NATIONAL LABORATORY Safety & Health Services Division INDUSTRIAL HYGIENE GROUP Standard Operating Procedure	NUMBER IH75135
	REVISION FINAL Rev 3
SUBJECT: POLICY AND FIELD PROCEDURE: Mercury Spills- Area Clearance Testing	DATE 08-24-05
	PAGE 4 OF 9

6.0 Procedure

6.1 Equipment:

- 6.1.1 Appropriate PPE as determined in Step 4.3.
 - 6.1.2 Mercury Indicator powder, J. T. Baker Product Number 4509-01, or equivalent.
 - 6.1.3 Jerome Mercury Meter 431X, or equivalent.
- 6.2 Observe that the clean up of the spill follows an approved procedure and that appropriate PPE and exposure monitoring is conducted. After appropriate abatement, clearance testing may be initiated.
- 6.3 ***Airborne Vapor test:*** Using a direct reading meter, sample at a height of one (1) inch (2.54 cm) above the entire surface of the spill area. If no concentration above **0.010 mg/m³** is detected, the surface “passes” the *Airborne Vapor* test.
- 6.4 ***Visual Inspection of spill area:*** Visually examine surfaces and crevices for droplets of mercury (shiny, silvery droplets) by using a flashlight or lamp at an oblique angle. If none are observed, proceed to *Indicator Powder* testing. If droplets are observed, instruct the appropriate personnel to repeat the approved clean-up procedure.
- 6.5 If the *Airborne Vapor* test and the *Visual Inspection* are successfully passed, the area not immediately involved in the spill may be released for limited re-occupancy. Place barriers, such as warning tape, to prevent access to areas where the indicator powder will be spread. Barrier indicators should state: “Caution” and Mercury Spill Area, Do not Enter”.
- 6.6 ***Indicator Powder test:*** Spread the indicator powder in a thin film over the entire surface of the spill area and extend at least six inches beyond areas cleaned on all sides. Be sure to spread powder into cracks and crevices and low spots. Remove lower cabinet drawers to access the space behind cabinet kickboards, if appropriate. Minimize dust generation when spreading the powder. Allow the indicator powder to set on the surfaces. Strong positives response (change to black) may occur as soon as 5 minutes. After **24 hours**, if no color change is seen in the powder (i.e. change from white to pink, orange, or black spots in any part of the powder), the surface “passes” the *Indicator powder* test. For vertical surfaces, mix the powder with water and “paint” on surfaces.

BROOKHAVEN NATIONAL LABORATORY Safety & Health Services Division INDUSTRIAL HYGIENE GROUP Standard Operating Procedure		NUMBER IH75135
		REVISION FINAL Rev 3
SUBJECT:	POLICY AND FIELD PROCEDURE:	DATE 08-24-05
Mercury Spills- Area Clearance Testing		PAGE 5 OF 9

- 6.7 After the test, have the indicator powder removed from surfaces with a **mercury designated** HEPA vacuum by the appropriate personnel. After clean up of the indicator powder, the area may be released for re-occupancy. Handle the powder residue in the vacuum cleaner as per instructions by the EWMSD.
- 6.8 If the area fails either the *Indicator Powder* test or the *Airborne Vapor* test, have the appropriate personnel repeat the approved clean-up procedure. Then repeat the *Airborne Vapor* and *Indicator Powder* tests.
- 6.9 **Documentation:** Record the test results on the *BNL Mercury Spill Clearance Test Record* (Attachment 9.1) or an equivalent.

Summary of Test Criteria

Sample Media	BNL Passing Criteria
Air	<0.01 mg/m ³ (as an instantaneous reading)
Indicator Powder	No color change (does NOT change from white to pink, orange, or black)

Note: The OSHA Ceiling is 0.1 mg/m³ and it must be met also

7.0 Implementation & Training

Personnel Qualification

- 7.1 Only persons who thoroughly understand this procedure and have demonstrated competency to the satisfaction of their supervision should conduct this testing.
- 7.2 Only persons who thoroughly understand the hazards of mercury and have documented training in Hazard Communication or Laboratory Standard should conduct this testing.

8.0 References

- 8.1 JT Baker Instrument Manual.

The only official copy is on-line at the SHSD IH Group website.
 Before using a printed copy, verify that it is current by checking the document issue date on the website.

BROOKHAVEN NATIONAL LABORATORY Safety & Health Services Division INDUSTRIAL HYGIENE GROUP Standard Operating Procedure		NUMBER IH75135
		REVISION FINAL Rev 3
SUBJECT: POLICY AND FIELD PROCEDURE:		DATE 08-24-05
Mercury Spills- Area Clearance Testing		PAGE 6 OF 9

9.0 Attachments:

- 9.1 *Mercury Spill Clearance Test Record*
- 9.2 MSDS of J. T. Baker Indicator Powder
- 9.3 Qualification Record and Job Performance Record

10.0 Documentation

Document Development and Revision Control Tracking		
PREPARED BY: <i>(Signature and date on file)</i> R. Selvey Certified Industrial Hygienist Date 03/08/02	REVIEWED BY: <i>(Signature and date on file)</i> J. Peters SHSD IH Group Date 03/12/02	APPROVED BY: <i>(Signature and date on file)</i> R. Selvey SHSD IH Group Leader Date 03/21/02
ESH Coordinator/ Date: <i>none</i>	Work Coordinator/ Date: <i>none</i>	SHSD Manager / Date <i>none</i>
QA Representative / Date: <i>none</i>	Training Coordinator / Date: <i>none</i>	Filing Code: IH52.05
Facility Support Rep. / Date: <i>none</i>	Environ. Compliance Rep. / Date: <i>none</i>	Effective Date: 03/21/02
ISM Review - Hazard Categorization <input type="checkbox"/> High <input checked="" type="checkbox"/> Moderate <input type="checkbox"/> Low/Skill of the craft	Validation: <input type="checkbox"/> Formal Walkthrough <input checked="" type="checkbox"/> Desk Top Review <input type="checkbox"/> SME Review Name / Date:	IMPLEMENTATION: Training Completed: 8/2005 Procedure posted on Web: 08/24/05 Hard Copy files updated: 08/24/05

Revision Log		
08/26/04	<i>(Signature and date on file)</i> R. Selvey, 08/26/04	Revise format to Section 7 Implementation and Training.
09/08/04	<i>(Signature and date on file)</i> R. Selvey, 09/08/04	Added JPM (Attachment 9.3). Changed text regarding color of indicator powder change and 24 hour test period as per JT Baker Instrument Manual.

The only official copy is on-line at the SHSD IH Group website.
 Before using a printed copy, verify that it is current by checking the document issue date on the website.

BROOKHAVEN NATIONAL LABORATORY Safety & Health Services Division INDUSTRIAL HYGIENE GROUP Standard Operating Procedure	NUMBER IH75135
	REVISION FINAL Rev 3
SUBJECT: POLICY AND FIELD PROCEDURE: Mercury Spills- Area Clearance Testing	DATE 08-24-05
	PAGE 7 OF 9

Purpose: <input type="checkbox"/> Temporary Change <input type="checkbox"/> Change in Scope <input type="checkbox"/> Periodic review <input checked="" type="checkbox"/> Clarify/enhance procedural controls		
Changed resulting from: <input type="checkbox"/> Environmental impacts <input type="checkbox"/> Federal, State and/or Local requirements <input type="checkbox"/> Corrective/preventive actions to non-conformances <input checked="" type="checkbox"/> none of the above		
Section/page and Description of change: Changes to Section 6.6 and 6.7 based on workers comments in training class. Add more info on type of vacuum cleaner and location to spread powder. Section 6.9 had text added for clarity on the clearance criteria.		
<i>R. Selvey 08/24/05</i> (signature/date on file) SME Reviewer/Date:	Reviewer/Date:	Reviewer/Date:

The only official copy is on-line at the SHSD IH Group website.
Before using a printed copy, verify that it is current by checking the document issue date on the website.

BROOKHAVEN NATIONAL LABORATORY Safety & Health Services Division INDUSTRIAL HYGIENE GROUP Standard Operating Procedure	NUMBER IH75135
	REVISION FINAL Rev 3
SUBJECT: POLICY AND FIELD PROCEDURE: Mercury Spills- Area Clearance Testing	DATE 08-24-05
	PAGE 8 OF 9

Attachment 9.1

Mercury Spill Test Record

Next page

The only official copy is on-line at the SHSD IH Group website.
 Before using a printed copy, verify that it is current by checking the document issue date on the website.

BROOKHAVEN NATIONAL LABORATORY Safety & Health Services Division -- Industrial Hygiene Group	NUMBER IH75135	REVISION FINAL Rev 0
SUBJECT: POLICY AND FIELD PROCEDURE: <h2 style="margin: 0;">Mercury Spill Clearance Testing Record</h2>		

DATE:	SURVEYOR(S):
-------	--------------

I. AREA INFORMATION		
DEPT:	BLDG:	ROOM:
Description of Spill and Area:		

II. AIRBORNE VAPOR SURVEY INFORMATION Passing Criteria <0.010 mg/m³		
INSTRUMENT:	MODEL:	SERIAL#:
FACTORY CALIBRATION DATE:	PRE-CAL: BY:	POST CAL: BY:
TIME	LOCATION	MERCURY READING mg/m ³

III. INDICATOR POWDER TEST Passing Criteria = no color change
Spread powder over entire spill area, wait 12 hours , observe color
<input type="checkbox"/> No color change detected (passing) <input type="checkbox"/> Color Change detected (from white to orange)
Comments:

V. CONCLUSIONS & RECOMMENDATIONS
<input type="checkbox"/> Area Passed Tests <input type="checkbox"/> Test Failed
Comments:
Area Release for Re-occupancy by: Name: _____ Date: _____
Return completed form to: IH Lab, Building 120 FILE CODE: IH 75QR. FORM IH75135 9.1 (08/04)

The only official copy is on-line at the SHSD IH Group website.
Before using a printed copy, verify that it is current by checking the document issue date on the website.

BROOKHAVEN NATIONAL LABORATORY Safety & Health Services Division INDUSTRIAL HYGIENE GROUP Standard Operating Procedure	NUMBER IH75135
	REVISION Final Rev 1
SUBJECT: SAMPLING POLICY AND FIELD PROCEDURE: Mercury Spill Clearance	DATE 09-07-04
	PAGE 10 OF 9

Attachment 9.2

MSDS for Mercury Indicator Powder

See next page



From: Mallinckrodt Baker, Inc.
222 Red School Lane
Phillipsburg, NJ 08865



24 Hour Emergency Telephone: 908-859-2151
CHEMTREC: 1-800-424-9300

National Response in Canada
CANUTEC: 613-696-6666

Outside U.S. and Canada
Chemtrec: 703-527-3897

NOTE: CHEMTREC, CANUTEC and National Response Center emergency numbers to be used only in the event of chemical emergencies involving a spill, leak, fire, exposure or accident involving chemicals.

All non-emergency questions should be directed to Customer Service (1-800-592-2537) for assistance.

Mercury Indicator

MSDS Number: Z6056 --- Effective Date: 05/17/01

1. Product Identification

Synonyms: None
CAS No.: Not applicable to mixtures.
Molecular Weight: Not applicable to mixtures.
Chemical Formula: Proprietary Mixture
Product Codes: 4509

2. Composition/Information on Ingredients

Ingredient	CAS No	Percent	Hazardous
Cuprous Iodide	7681-65-4	1 - 50%	Yes
Sulfur	7704-34-9	1 - 50%	Yes
Starch	9005-25-8	1 - 50%	Yes
Silica, Amorphous	7631-86-9	1 - 50%	Yes

Specific CAS No. for Silica, Amorphous is 112945-52-5 (Amorphous fumed silica)

3. Hazards Identification

Emergency Overview

WARNING! HARMFUL IF SWALLOWED OR INHALED. CAUSES IRRITATION TO SKIN, EYES AND RESPIRATORY TRACT. DUST MAY FORM FLAMMABLE OR EXPLOSIVE MIXTURE WITH AIR.

J.T. Baker SAF-T-DATA^(tm) Ratings (Provided here for your convenience)

Health Rating: 2 - Moderate
Flammability Rating: 0 - None
Reactivity Rating: 1 - Slight
Contact Rating: 1 - Slight

Lab Protective Equip: GOGGLES; LAB COAT
Storage Color Code: Orange (General Storage)

Potential Health Effects

Amorphous fumed silica does not contain crystalline silica.

Inhalation:

May cause dryness and irritation to mucous membranes, nose, and throat. Symptoms may include coughing, sore throat, dyspnea, wheezing, and non-specific chest illnesses.

Ingestion:

Major hazard is that of the copper iodide component, of which only trace amounts are moderately toxic. Symptoms may include burning pain in the mouth, esophagus, and stomach. Symptoms of copper poisoning include hemorrhagic gastritis, nausea, vomiting, abdominal pain, metallic taste, and diarrhea. Ingestion of very large amounts of sulfur may cause sore throat, nausea, headache, and possibly unconsciousness in severe cases. May be converted into hydrogen sulfide in the intestine.

Skin Contact:

Causes irritation to skin. Symptoms include redness, itching, and pain.

Eye Contact:

Causes irritation, redness, and pain.

Chronic Exposure:

Prolonged overexposure to sulfur dust can produce possible skin sensitization and permanent eye damage (clouding of the lens and chronic irritation). Prolonged inhalation can cause irritation of mucous membranes.

Chronic iodide overdoses have produced iodism. Headache, fever, sneezing, salivation, and skin rashes may occur. Prolonged or repeated exposure to dusts of copper salts may cause discoloration of the skin or hair, ulceration and perforation of the nasal septum, runny nose, metallic taste, and atrophic changes and irritation of the mucous membranes.

Aggravation of Pre-existing Conditions:

Sensitive individuals can experience skin irritation from repeated exposure to sulfur dust. Allergic responses can occur.

4. First Aid Measures

Inhalation:

Remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

Ingestion:

Induce vomiting immediately as directed by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention.

Skin Contact:

Immediately flush skin with plenty of water for at least 15 minutes. Remove contaminated clothing and shoes. Get medical attention. Wash clothing before reuse. Thoroughly clean shoes before reuse.

Eye Contact:

Immediately flush eyes with plenty of water for at least 15 minutes, lifting lower and upper eyelids occasionally. Get medical attention immediately.

5. Fire Fighting Measures

Fire:

Flash point: 207C (405F) OC

Autoignition temperature: 232C (450F)

(Listed values are for sulfur.)

Slight fire hazard when exposed to heat or flame. As with most organic solids, fire is possible at elevated temperatures or by contact with an ignition source. Contact with strong oxidizers may cause fire.

Explosion:

Fine dust dispersed in air in sufficient concentrations, and in the presence of an ignition source is a potential dust explosion hazard.

Fire Extinguishing Media:

For fires involving sulfur, extinguish with dry chemical, sand, water spray, fog, or standard foam. If water is used, apply from as far a distance as possible. Use water spray to blanket fire, cool fire exposed containers, and to flush non-ignited spills or vapors away from fire. Solid streams of water should not be used because of possibility of dispersing dust clouds of sulfur in air.

Special Information:

In the event of a fire, wear full protective clothing and NIOSH-approved self-contained breathing apparatus with full facepiece operated in the pressure demand or other positive pressure mode.

6. Accidental Release Measures

Remove all sources of ignition. Ventilate area of leak or spill. Wear appropriate personal protective equipment as specified in Section 8. Spills: Clean up spills in a manner that does not disperse dust into the air. Use non-sparking tools and equipment. Reduce airborne dust and prevent scattering by moistening with water. Pick up spill for recovery or disposal and place in a closed container.

7. Handling and Storage

Keep in a tightly closed container. Store in a cool, dry, corrosion-proof, ventilated area away from moisture, sources of heat or ignition, combustibles and oxidizers. Protect against physical damage. Avoid dust formation and control ignition sources. Employ grounding, venting and explosion relief provisions in accord with accepted engineering practices in any process capable of generating dust and/or static electricity. Empty only into inert or non-flammable atmosphere. Emptying contents into a non-inert atmosphere where flammable vapors may be present could cause a flash fire or explosion due to electrostatic discharge. Containers of this material may be hazardous when empty since they retain product residues (dust, solids); observe all warnings and precautions listed for the product. Do Not attempt to clean empty containers since residue is difficult to remove. Do not pressurize, cut, weld, braze, solder, drill, grind or expose such containers to heat, sparks, flame, static electricity or other sources of ignition: they may explode and cause injury or death.

8. Exposure Controls/Personal Protection

Airborne Exposure Limits:

- OSHA Permissible Exposure Limit (PEL) -

Cuprous Iodide: 1 mg/m³ (TWA) for copper dusts & mists as Cu

Amorphous Fumed Silica (nuisance dust): 15 mg/m³ (total dust, TWA),

5mg/m³ (respirable fraction, TWA)

Starch: 15 mg/m³ (total dust, TWA),

5 mg/m³ (respirable fraction, TWA)

- ACGIH Threshold Limit Value (TLV) -

Cuprous Iodide: 1 mg/m³ (TWA) for copper dusts & mists as Cu

Amorphous Fumed Silica (dust containing no asbestos and < 1% crystalline silica for particulates not otherwise classified): 10 mg/m³ (total dust, TWA)

3 mg/m³ (respirable fraction, TWA)

Starch: 10 mg/m³ (TWA), A4-not classifiable as human carcinogen

Ventilation System:

A system of local and/or general exhaust is recommended to keep employee exposures below the Airborne Exposure Limits. Local exhaust ventilation is generally preferred because it can control the emissions of the contaminant at its source, preventing dispersion of it into the general work area. Please refer to the ACGIH document, *Industrial Ventilation, A Manual of Recommended Practices*, most recent edition, for details.

Personal Respirators (NIOSH Approved):

If the exposure limit is exceeded, a half-face dust/mist respirator may be worn for up to ten times the exposure limit or the maximum use concentration specified by the appropriate regulatory agency or respirator supplier, whichever is lowest. A full-face piece dust/mist respirator may be worn up to 50 times the exposure limit, or the maximum use concentration specified by the appropriate regulatory agency, or respirator supplier, whichever is lowest. For emergencies or instances where the exposure levels are not known, use a full-facepiece positive-pressure, air-supplied respirator. **WARNING:** Air-purifying respirators do not protect workers in oxygen-deficient atmospheres.

Skin Protection:

Wear impervious protective clothing, including boots, gloves, lab coat, apron or coveralls, as appropriate, to prevent skin contact.

Eye Protection:

Use chemical safety goggles and/or full face shield where dusting or splashing of solutions is possible. Maintain eye wash fountain and quick-drench facilities in work area.

9. Physical and Chemical Properties

Appearance:

White to yellow solid.

Odor:

No information found.

Solubility:

Negligible.

Specific Gravity:

No information found.

pH:

No information found.

% Volatiles by volume @ 21C (70F):

0

Boiling Point:

No information found.

Melting Point:

No information found.

Vapor Density (Air=1):

Not applicable.

Vapor Pressure (mm Hg):

No information found.

Evaporation Rate (BuAc=1):

No information found.

10. Stability and Reactivity

Stability:

Stable under ordinary conditions of use and storage.

Hazardous Decomposition Products:

Burning may release hydrogen iodide or iodine vapors and oxides of sulfur and carbon.

Hazardous Polymerization:

Will not occur.

Incompatibilities:

For Sulfur: chlorates, nitrates and other oxidizing agents. Halogens, carbides, zinc, tin, alkali metals, phosphorus, ammonia, ammonium nitrate, charcoal and many other substances.

For Cuprous Iodide: can explode when mixed with potassium or nitromethane. Copper salts promote the decomposition of hydrazine and sodium hypobromite; many form dangerous, explosive, acetylides.

For Amorphous Silica: hydrogen fluoride, fluorine, xenon hexafluoride, oxygen difluoride, and chlorine trifluoride. Substance can explode when wet and heated with magnesium.

Conditions to Avoid:

Heat, flame, ignition sources, dusting and incompatibles.

11. Toxicological Information

Toxicological Data:

For amorphous fumed silica: oral rat LD50: 3160 mg/kg. Investigated as a tumorigen and mutagen.

Carcinogenicity:

IARC category for silica, amorphous (7631-86-9) applies to silicas that may contain crystalline silica. The silica in this product is synthetic and does not contain crystalline silica.

-----\Cancer Lists\-----

---NTP Carcinogen---

Ingredient	Known	Anticipated	IARC Category
Cuprous Iodide (7681-65-4)	No	No	None
Sulfur (7704-34-9)	No	No	None
Starch (9005-25-8)	No	No	None
Silica, Amorphous (7631-86-9)	No	No	3

12. Ecological Information

Environmental Fate:

No information found.

Environmental Toxicity:

No information found.

13. Disposal Considerations

Whatever cannot be saved for recovery or recycling should be managed in an appropriate and approved waste disposal facility. Processing, use or contamination of this product may change the waste management options. State and local disposal regulations may differ from federal disposal regulations. Dispose of container and unused contents in accordance with federal, state and local requirements.

14. Transport Information

Not regulated.

15. Regulatory Information

-----\Chemical Inventory Status - Part 1\-----

Ingredient	TSCA	EC	Japan	Australia
Cuprous Iodide (7681-65-4)	Yes	Yes	Yes	Yes
Sulfur (7704-34-9)	Yes	Yes	No	Yes
Starch (9005-25-8)	Yes	Yes	No	Yes
Silica, Amorphous (7631-86-9)	Yes	Yes	Yes	Yes

IH75135 Attachment 9.2

-----\Chemical Inventory Status - Part 2\-----

--Canada--

Ingredient Korea DSL NDSL Phil.

Cuprous Iodide (7681-65-4) Yes Yes No Yes
Sulfur (7704-34-9) Yes Yes No Yes
Starch (9005-25-8) Yes Yes No Yes
Silica, Amorphous (7631-86-9) Yes Yes No Yes

-----\Federal, State & International Regulations - Part 1\-----

-SARA 302- -----SARA 313-----

Ingredient RQ TPQ List Chemical Catg.

Cuprous Iodide (7681-65-4) No No No Copper compo
Sulfur (7704-34-9) No No No No
Starch (9005-25-8) No No No No
Silica, Amorphous (7631-86-9) No No No No

-----\Federal, State & International Regulations - Part 2\-----

-RCRA- -TSCA-

Ingredient CERCLA 261.33 8(d)

Cuprous Iodide (7681-65-4) No No No
Sulfur (7704-34-9) No No No
Starch (9005-25-8) No No No
Silica, Amorphous (7631-86-9) No No No

Chemical Weapons Convention: No TSCA 12(b): No CDTA: No
SARA 311/312: Acute: Yes Chronic: Yes Fire: Yes Pressure: No
Reactivity: No (Mixture / Solid)

Australian Hazchem Code: No information found.

Poison Schedule: S7

WHMIS:

This MSDS has been prepared according to the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.

16. Other Information

NFPA Ratings: Health: 2 Flammability: 1 Reactivity: 0

Label Hazard Warning:

WARNING! HARMFUL IF SWALLOWED OR INHALED. CAUSES IRRITATION TO SKIN, EYES AND RESPIRATORY TRACT. DUST MAY FORM FLAMMABLE OR EXPLOSIVE MIXTURE WITH AIR.

Label Precautions:

Avoid contact with eyes, skin and clothing.
Avoid breathing dust.
Keep container closed.
Use only with adequate ventilation.
Wash thoroughly after handling.
Keep away from heat, sparks and flame.
Avoid dust cloud in presence of an ignition source.

Label First Aid:

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. Remove contaminated clothing and shoes. Wash clothing before reuse. If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. If swallowed, induce vomiting immediately as directed by medical personnel. Never give anything by mouth to an unconscious person. In all cases, get medical attention.

Product Use:

Laboratory Reagent.

Revision Information:

No changes.

Disclaimer:

Mallinckrodt Baker, Inc. provides the information contained herein in good faith but makes no representation as to its comprehensiveness or accuracy. This document is intended only as a guide to the appropriate precautionary handling of the material by a properly trained person using this product. Individuals receiving the information must exercise their independent judgment in determining its appropriateness for a particular purpose. MALLINCKRODT BAKER, INC. MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE INFORMATION SET FORTH HEREIN OR THE PRODUCT TO WHICH THE INFORMATION REFERS. ACCORDINGLY, MALLINCKRODT BAKER, INC. WILL NOT BE RESPONSIBLE FOR DAMAGES RESULTING FROM USE OF OR RELIANCE UPON THIS INFORMATION.

Prepared by: Environmental Health & Safety
Phone Number: (314) 654-1600 (U.S.A.)

Mercury Spill- Area Clearance Testing
Job Performance Measure (JPM) Completion Certificate

Candidate's Name	Life Number:
------------------	--------------

Practical Skill Evaluation: Demonstration of Evaluation Methodology

Practical Skill Evaluation: Demonstration of Evaluation Methodology Criteria	Qualifying Performance Standard	Unsat.	Recov.	Satisf.
1. Hazard Analysis	Understands the need to perform a hazard analysis of the area and potential exposure to the self as sampler and workers in the area.			
2. Personal Protective Equipment	Understands the need to be aware of the potential surface contamination, airborne levels of contaminants, radiological hazards, noise hazards, etc. Knows how to determine the need for PPE.			
3. Sampling Equipment	Knows where equipment needed for the procedure is located and how to properly sign it out.			
6. Operating Parameters	Knows the theory to establish operating parameters (safety envelope) for the equipment.			
7. Documentation	Demonstrates correctly filling out IH monitoring forms.			

IH Procedure Details - Practical Skill Evaluation: Demonstration of Methodology

Criteria	Qualifying Performance Standard	Unsat.	Recov.	Satisf.
1. Spreading of indicator powder	Demonstrates placing a thin film of powder on spill surfaces. Correct technique and areas			
2. Observation of mercury presence	Knows the proper waiting period. Knows the color change that indicates the presence of mercury.			
3. Airborne vapor testing	Is qualified on procedure 75530 Jerome 431X <ul style="list-style-type: none"> ▪ Turning the Meter On and Off ▪ Calibration of the Meter ▪ Clearing Stored data ▪ Operation of taking a reading ▪ Downloading stored data ▪ Clearing data after downloading 			

I accept the responsibility for performing this task as demonstrated within this JPM and the corresponding SOP.

Candidate Signature:	Date:
----------------------	-------

I certify the candidate has satisfactorily performed each of the above listed steps and is capable of performing the task unsupervised.

Evaluator Signature:	Date:
----------------------	-------