Multi-pass CO_2 laser cavity for high repetition pulse trains

Mikhail Polyanskiy, ATF

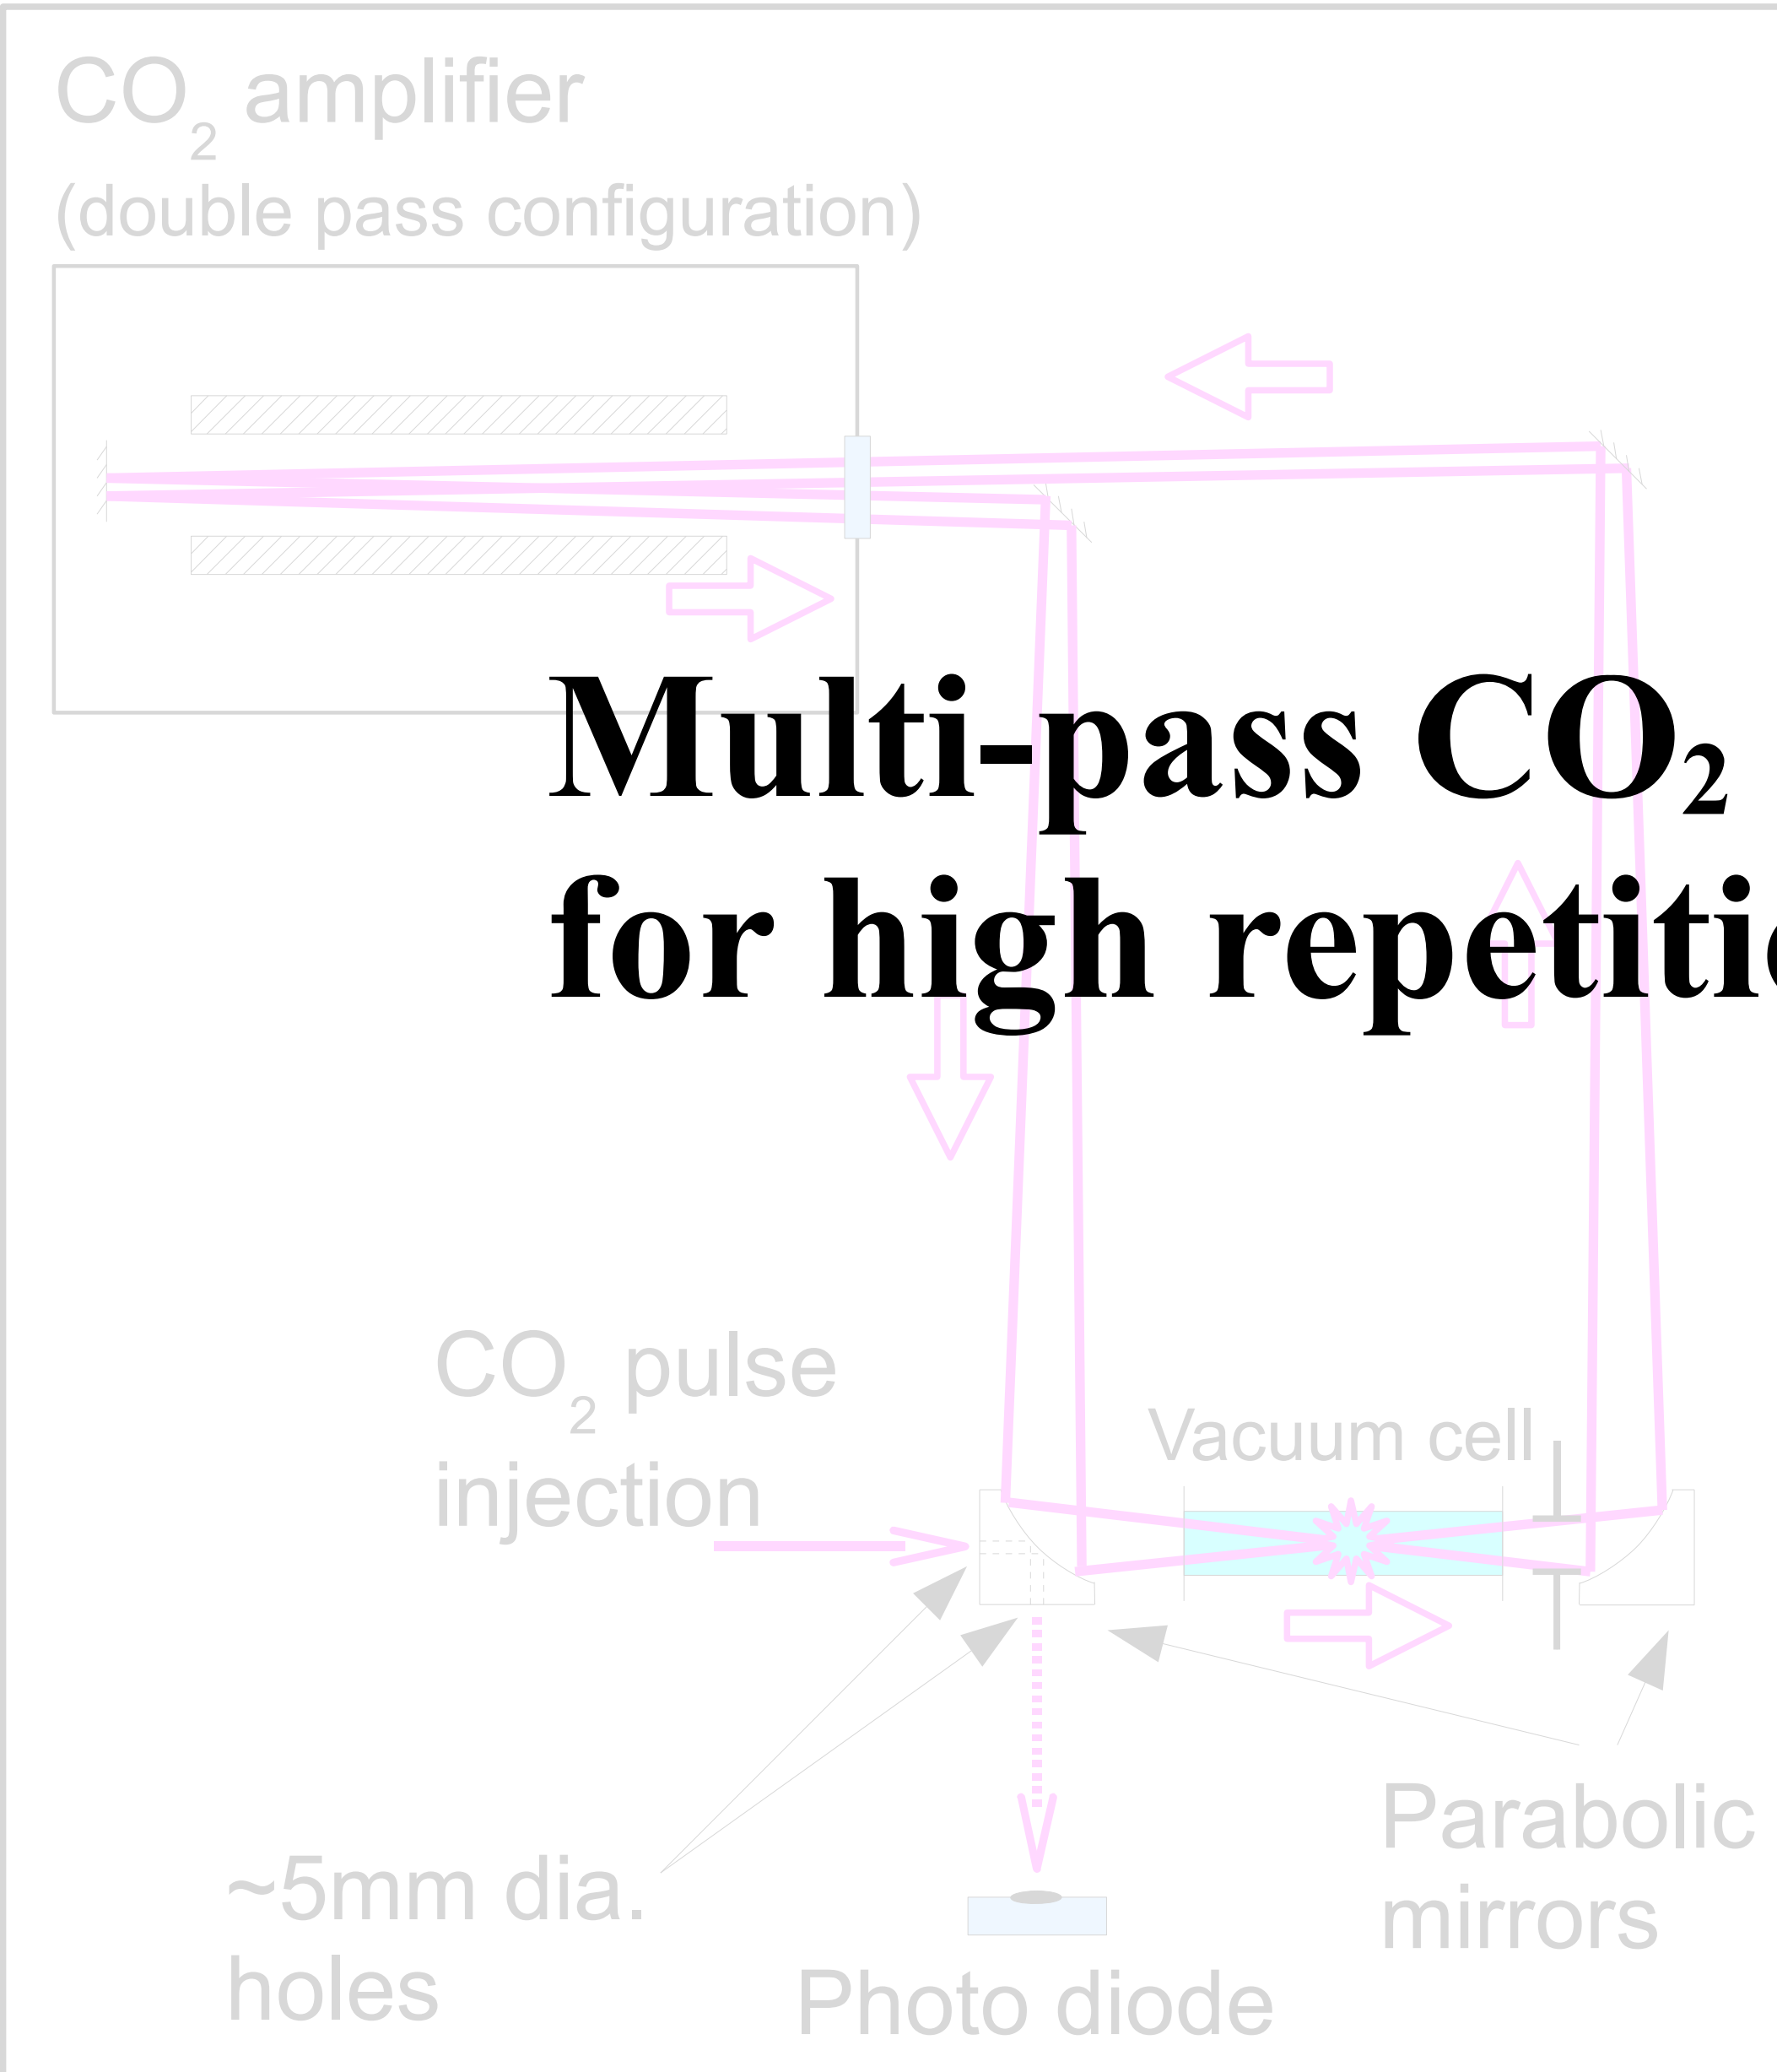

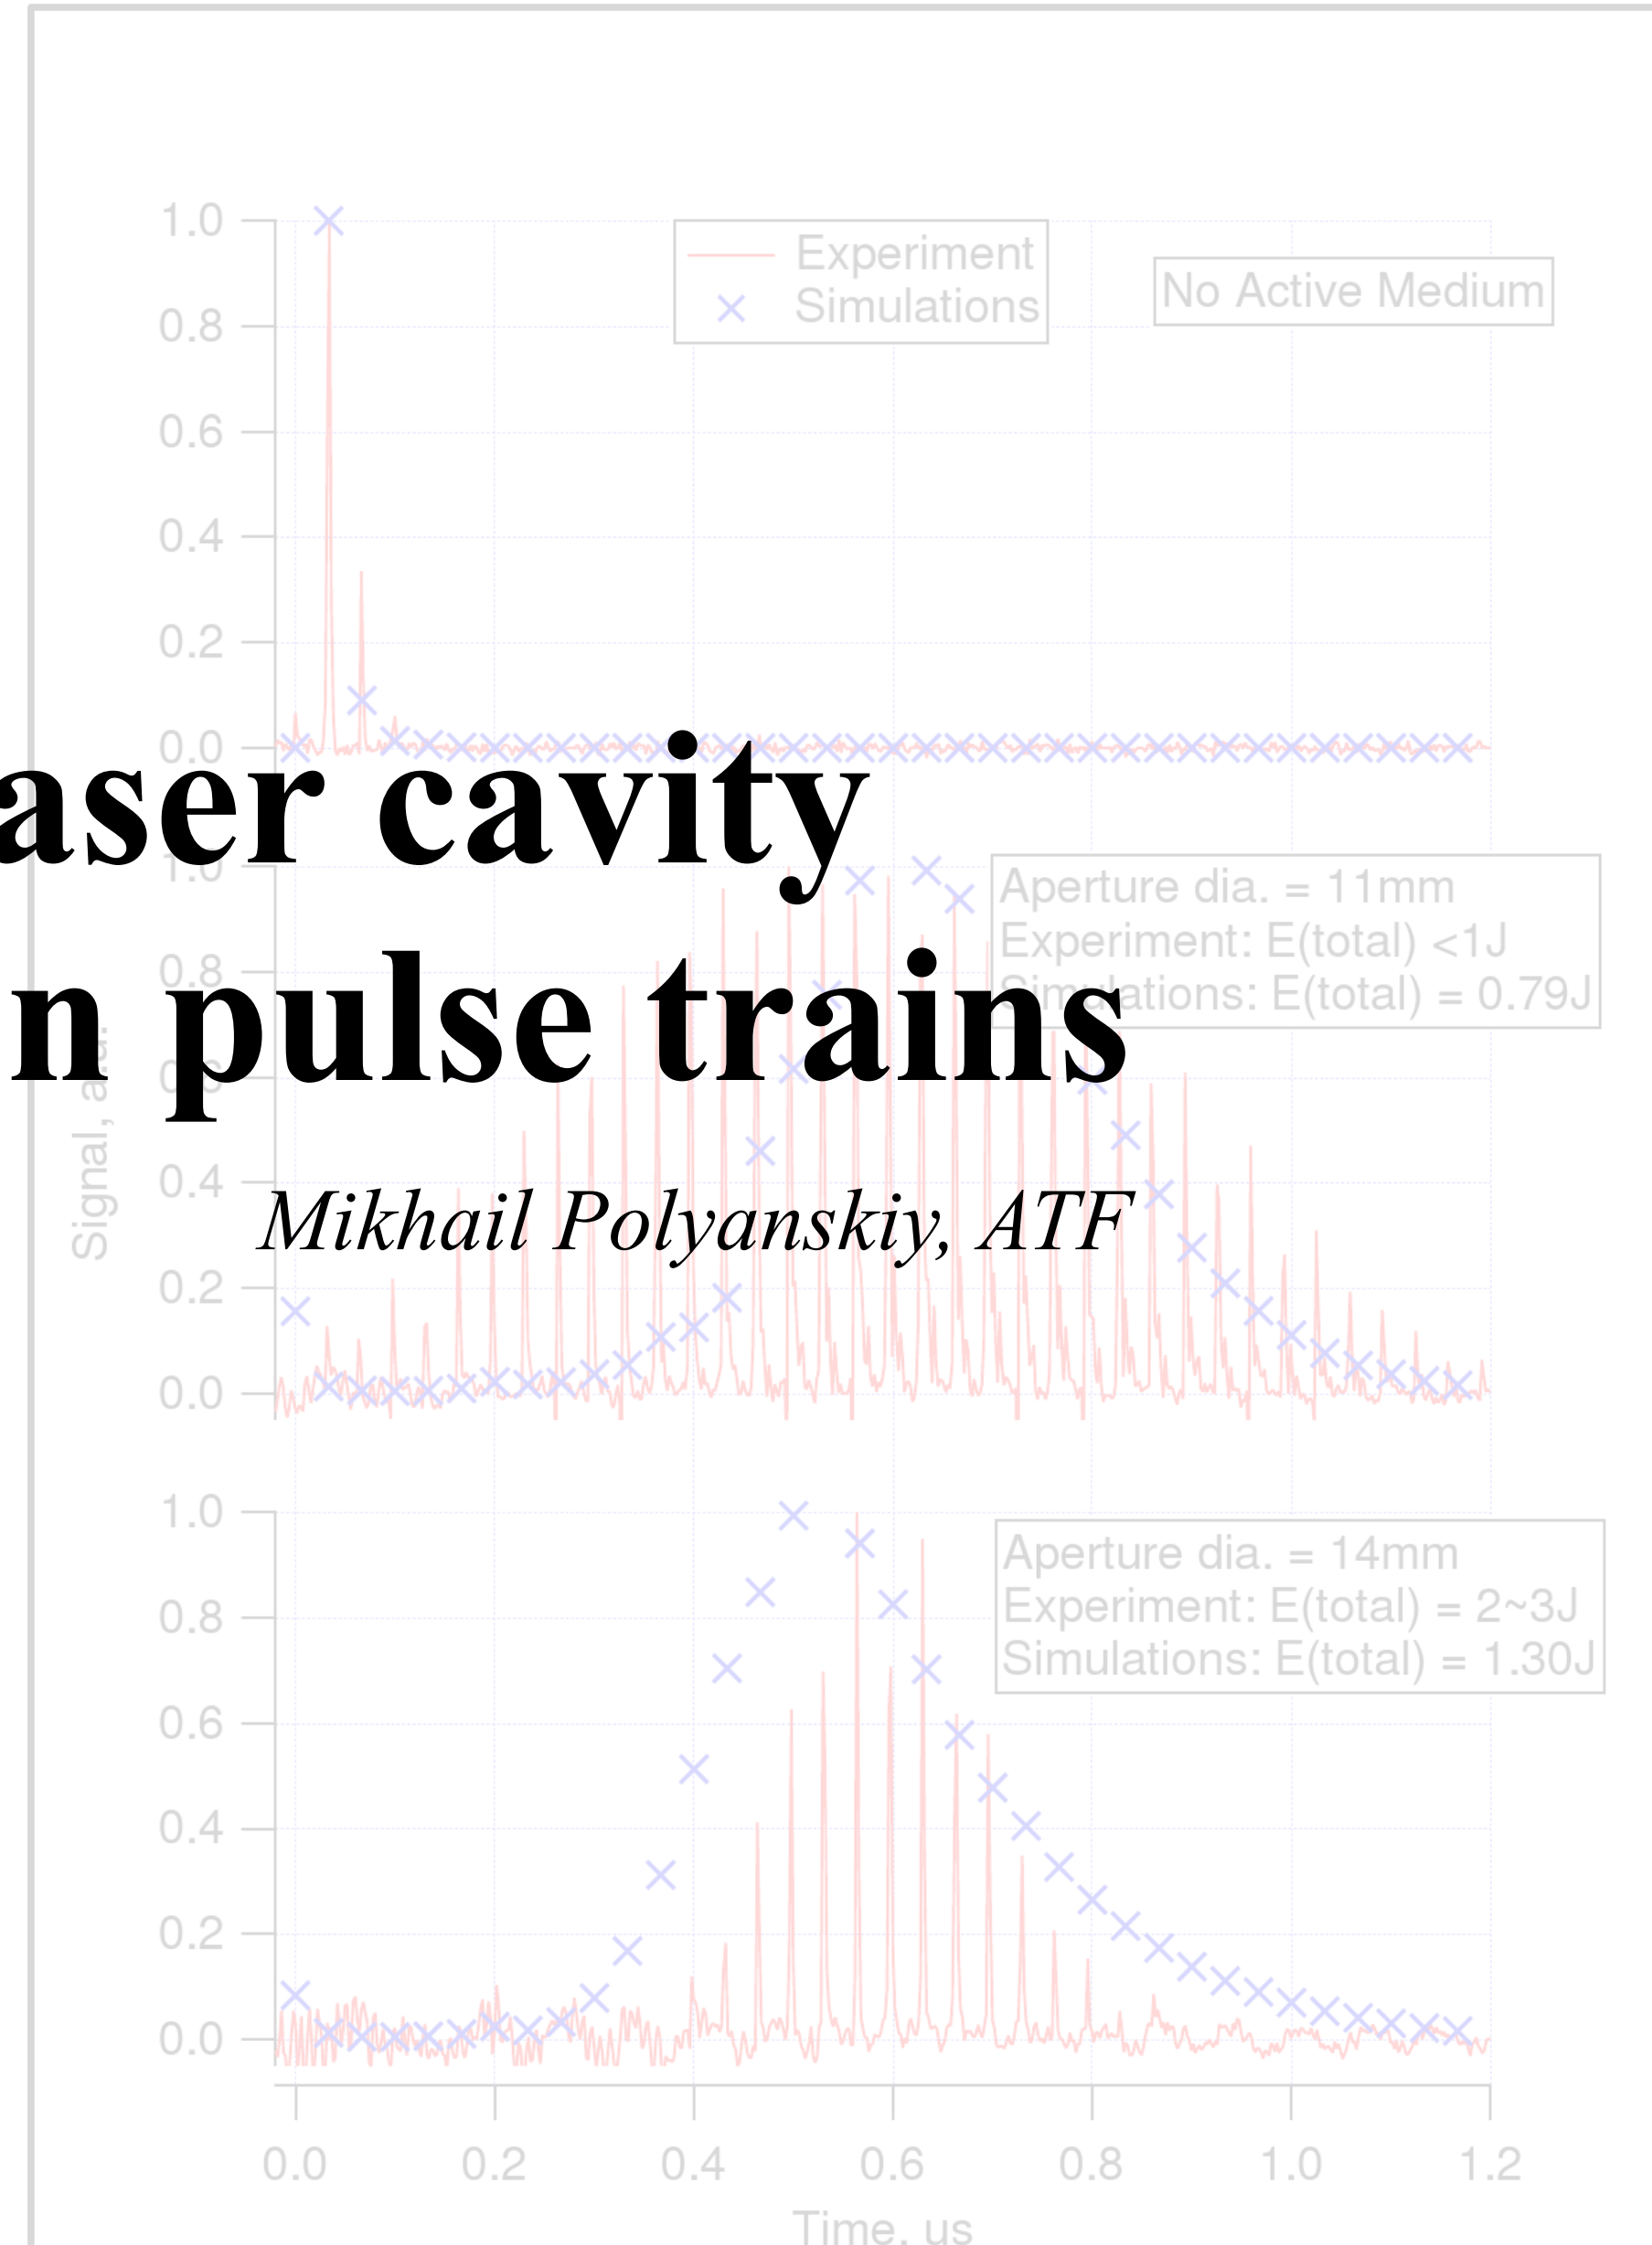

Motivations

- Polarized positron source for International Linear Collider (ILC)

- Polarized muon beams produced through gamma conversion will compete in brightness and energy efficiency with conventional proton-based sources.

- Multi-kW γ-sources conceivable based on state-of-art CO_2 lasers and energy recovery linacs for rare isotope photofission, transmutation of used nuclear fuel, polarized positron sources for e^+e^- colliders, etc.

- A path to compact pico- and femto-second light sources of the peak and average brightness of the order 10^{25} and 10^{17} (s mm^2 mrad^2 0.1%)$^{-1}$ correspondingly - the orders of magnitude higher than modern light sources.

Prior art: Thomson scattering experiments in ATF

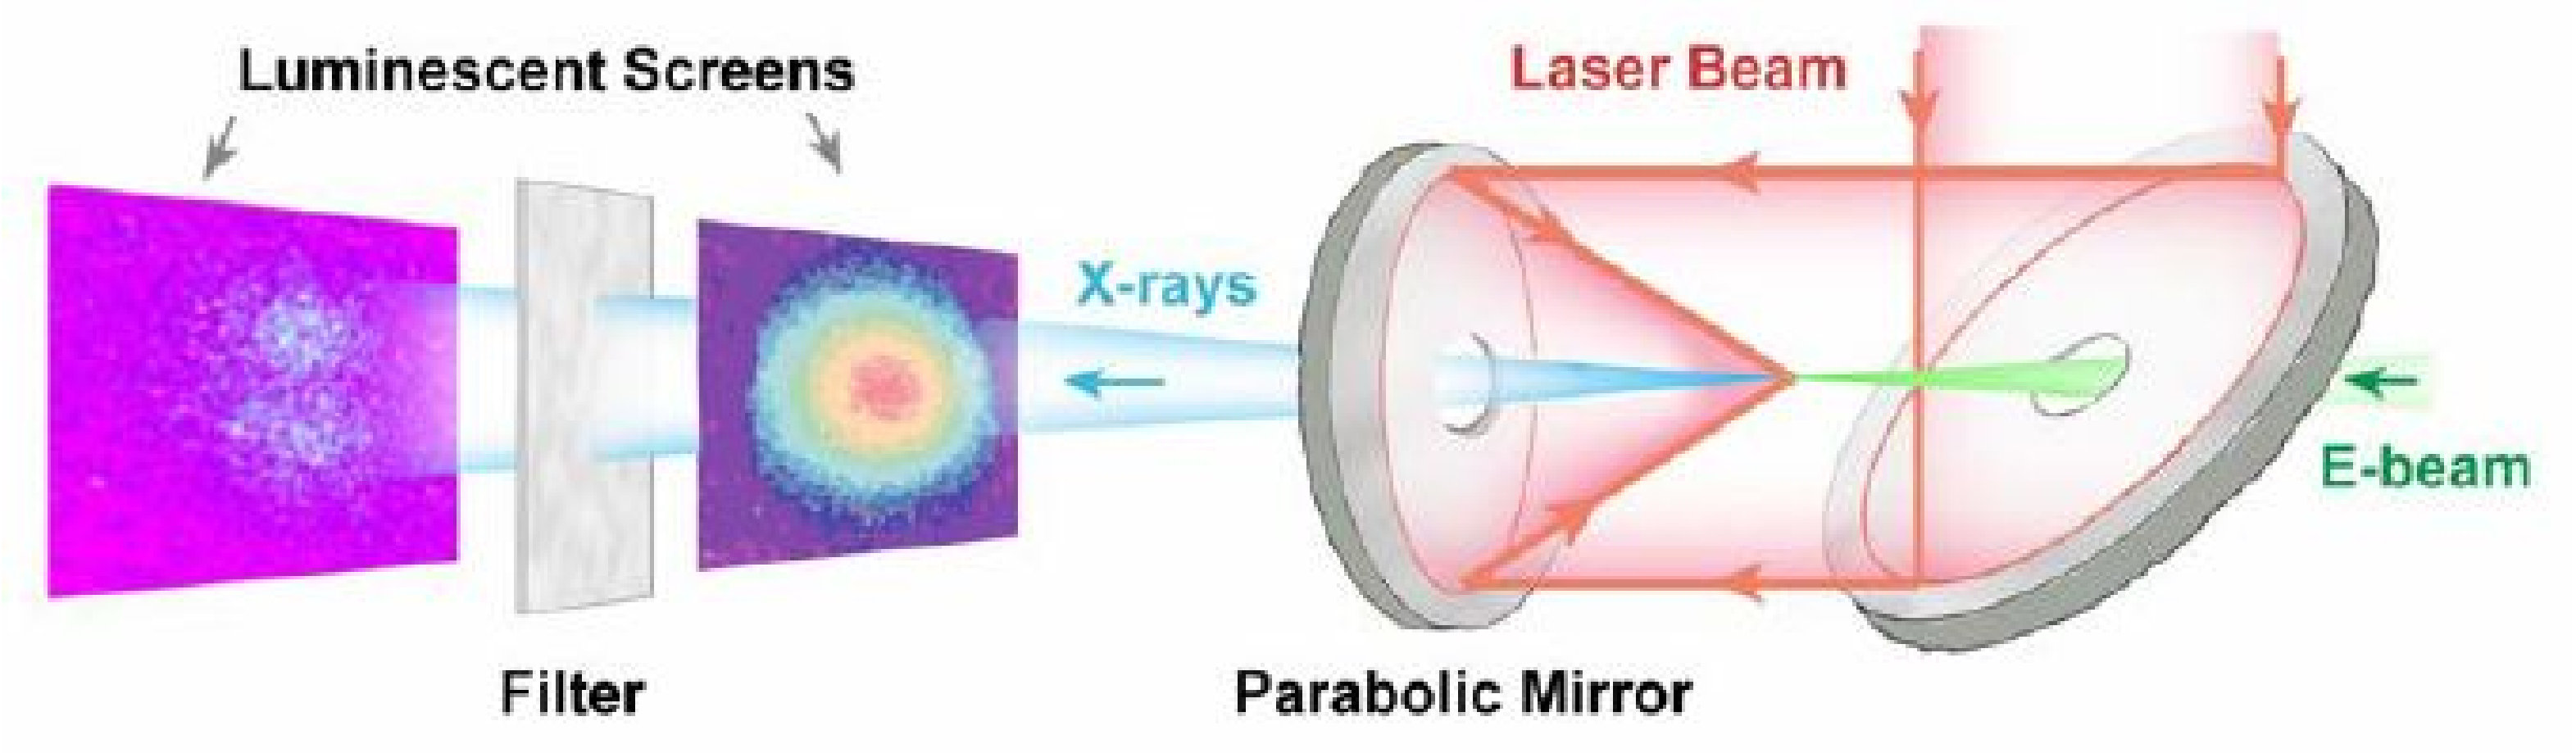

- Started as US/Japan collaboration for ILC positron source
- Record brightness and efficiency were demonstrated
- X-ray source is being used for user experiments to test applicability for material science
- Collaboration with UCLA/Italy brought equipment from ESRF

M. Babzien *et al. Observation of Second Harmonic in Thomson Scattering from Relativistic Electrons.* Phys. Rev. Lett. **96**, 054802 (2006)

Commercially available lasers

SOPRA (France)

Pressure	5 atm
Beam Size	50 x 50 mm^2
Repetition Rate	100 Hz
Pulse Energy	10 J
Average Power	1 kW
Ionization	x-ray

SDI (South Africa)

Pressure	10 atm
Beam Size	13 x 13 mm^2
Repetition Rate	up to 500 Hz
Pulse Energy	1.5 J
Average Power	750 W
Ionization	UV

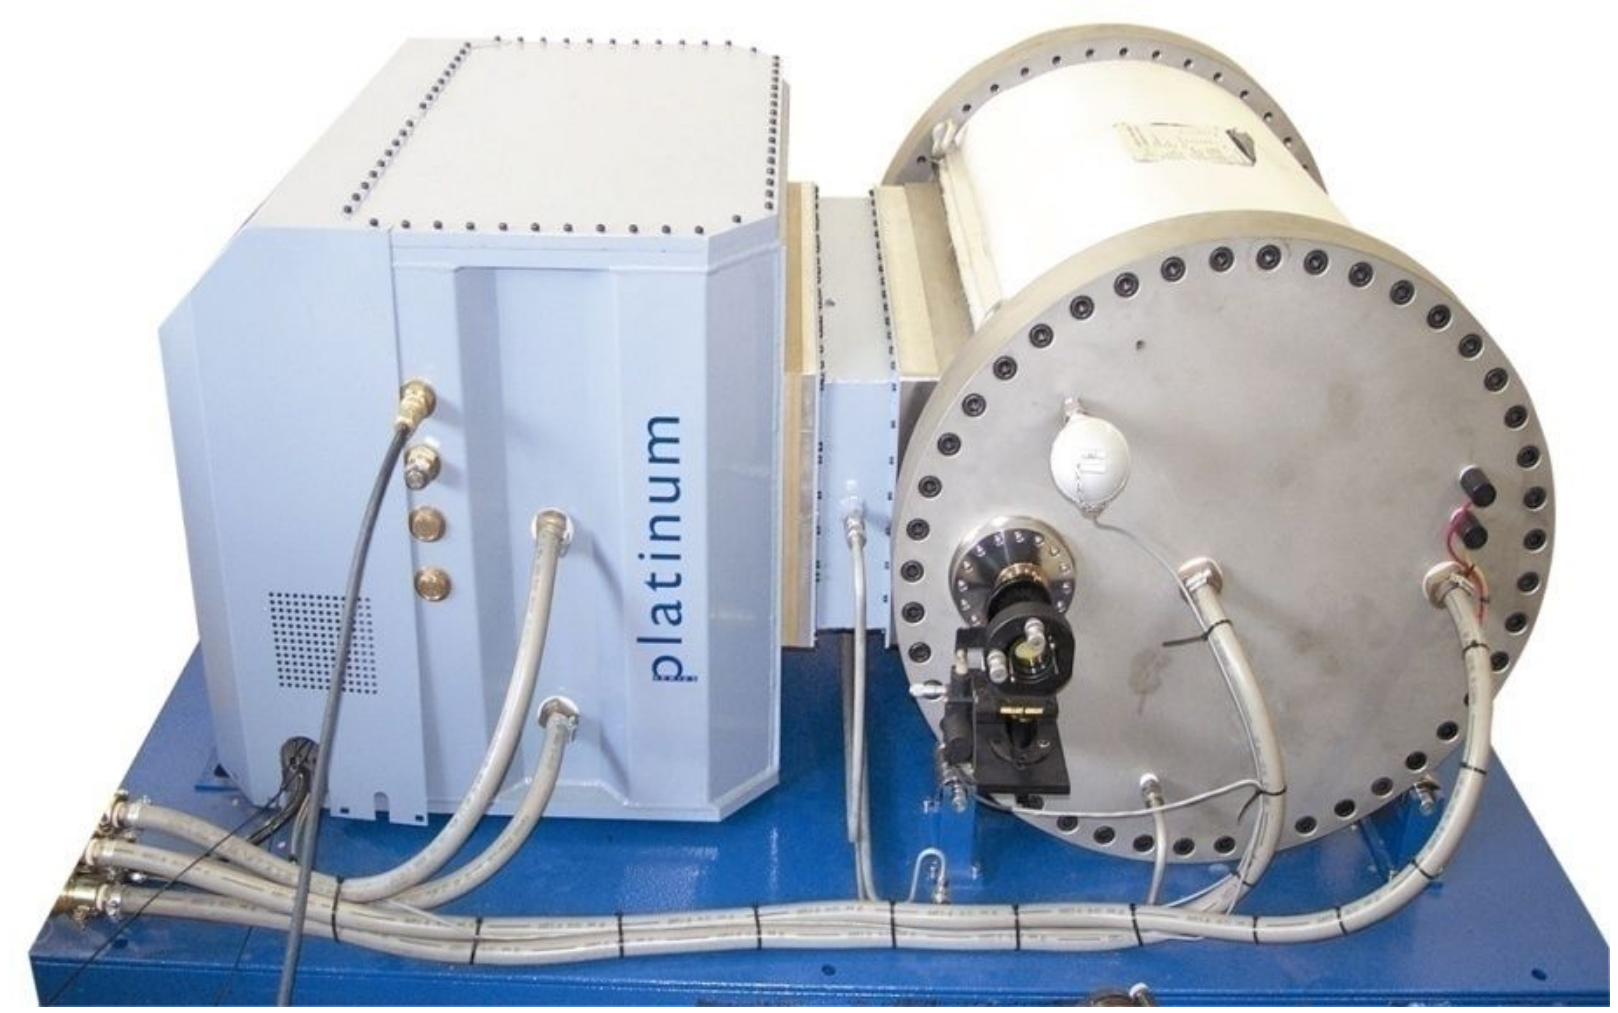

Laser specs for ILC

Pulse repetition rate	150 *Hz*
Bunches per pulse	100
Bunch Spacing	12 *ns*
Laser Wavelength	10 μm
Laser energy	1 *J*
Size at focus	40 μm
Laser pulse length	5 *ps*
E-beam energy	6 GeV
e^- bunch	10 nC
Number of γ per electron	1 (per IP)
γ-beam energy	40 MeV
Number of lasers	5
e^+ yield on target	2 %
e^+ bunch	1 nC

- Requires: 15 kHz, 15 kW, picosecond, sub-terawatt CO_2 laser.

- This exceeds capabilities of laser technology by 1-2 orders of magnitude.

- Instead, we propose to reuse laser energy by circulating the pulse inside the laser amplifier cavity that incorporates Compton interaction point (IP).

Polarized positron source: the concept

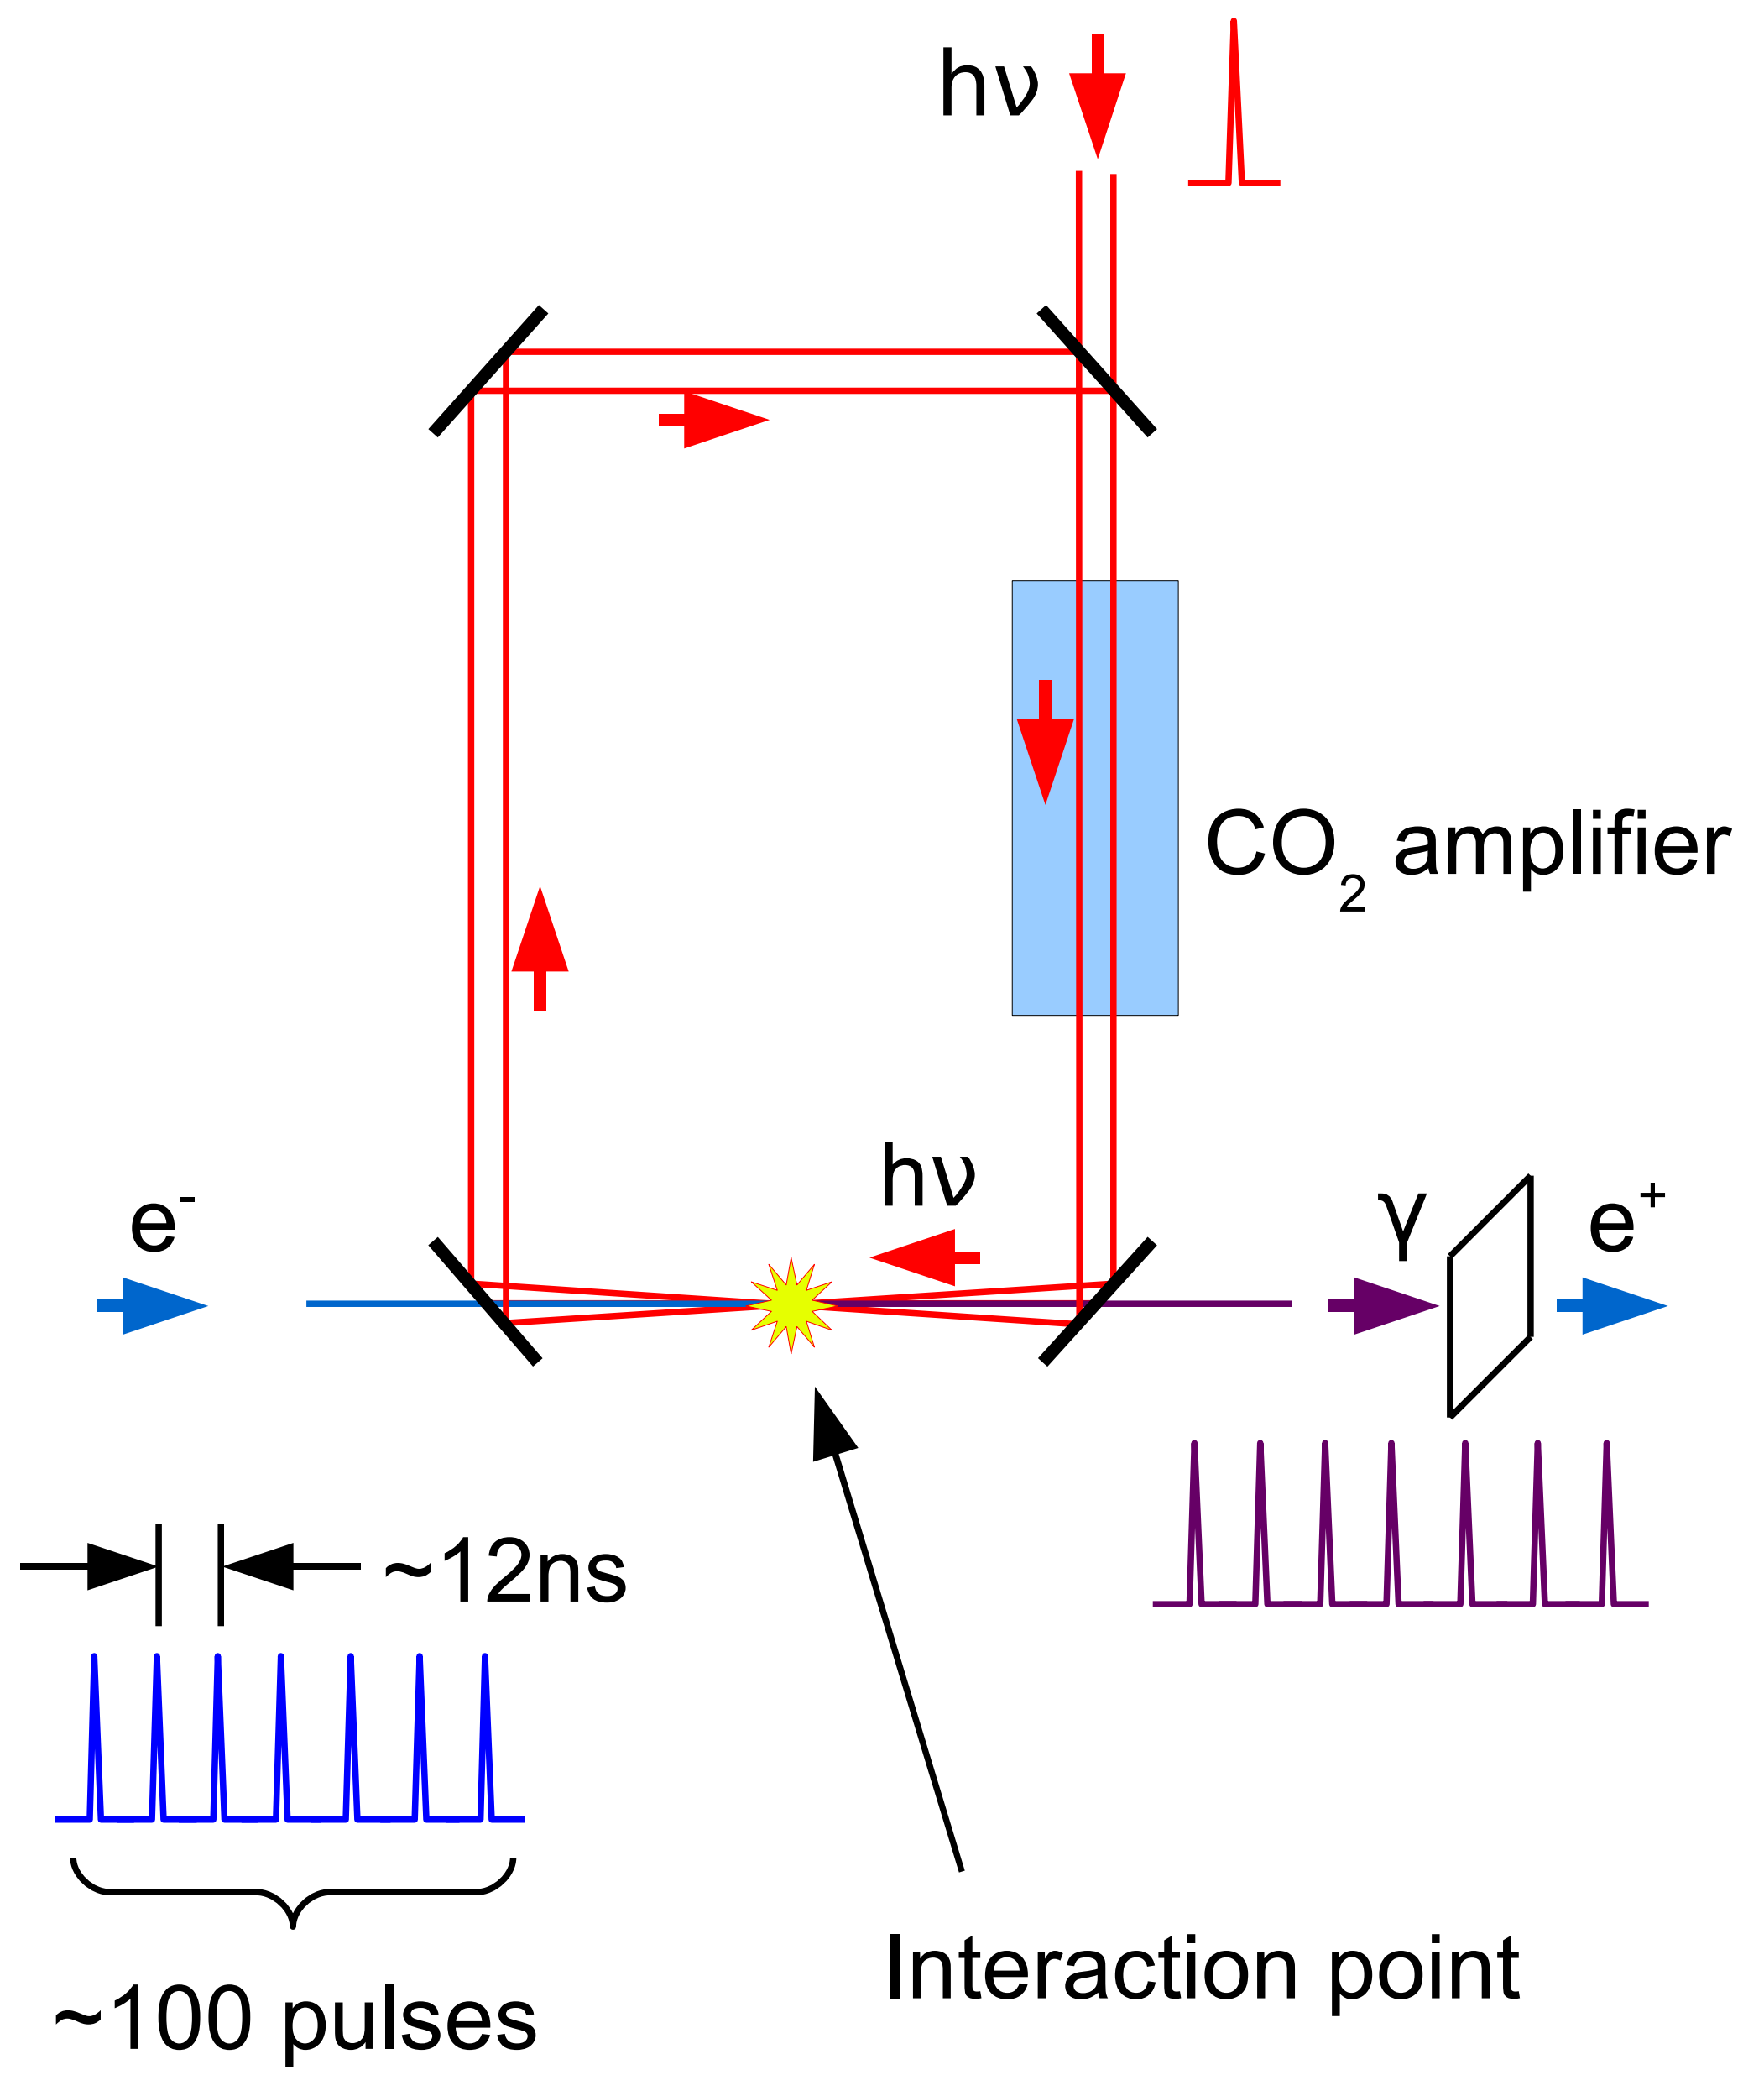

- *A picosecond CO_2 laser pulse circulates in a* *ring cavity*
- *At each pass through the cavity the laser pulse interacts with a counter-propagating electron pulse generating γ-quanta* via *Compton scattering*
- *Optical losses are compensated by* *intracavity amplifier*
- *The λ-proportional number of photons per Joule of laser energy allows for* *higher γ-yield* *(compared to solid state lasers)*

Polarized positron source for ILC, CLIC, Super B

Conventional Non-Polarized Positrons:

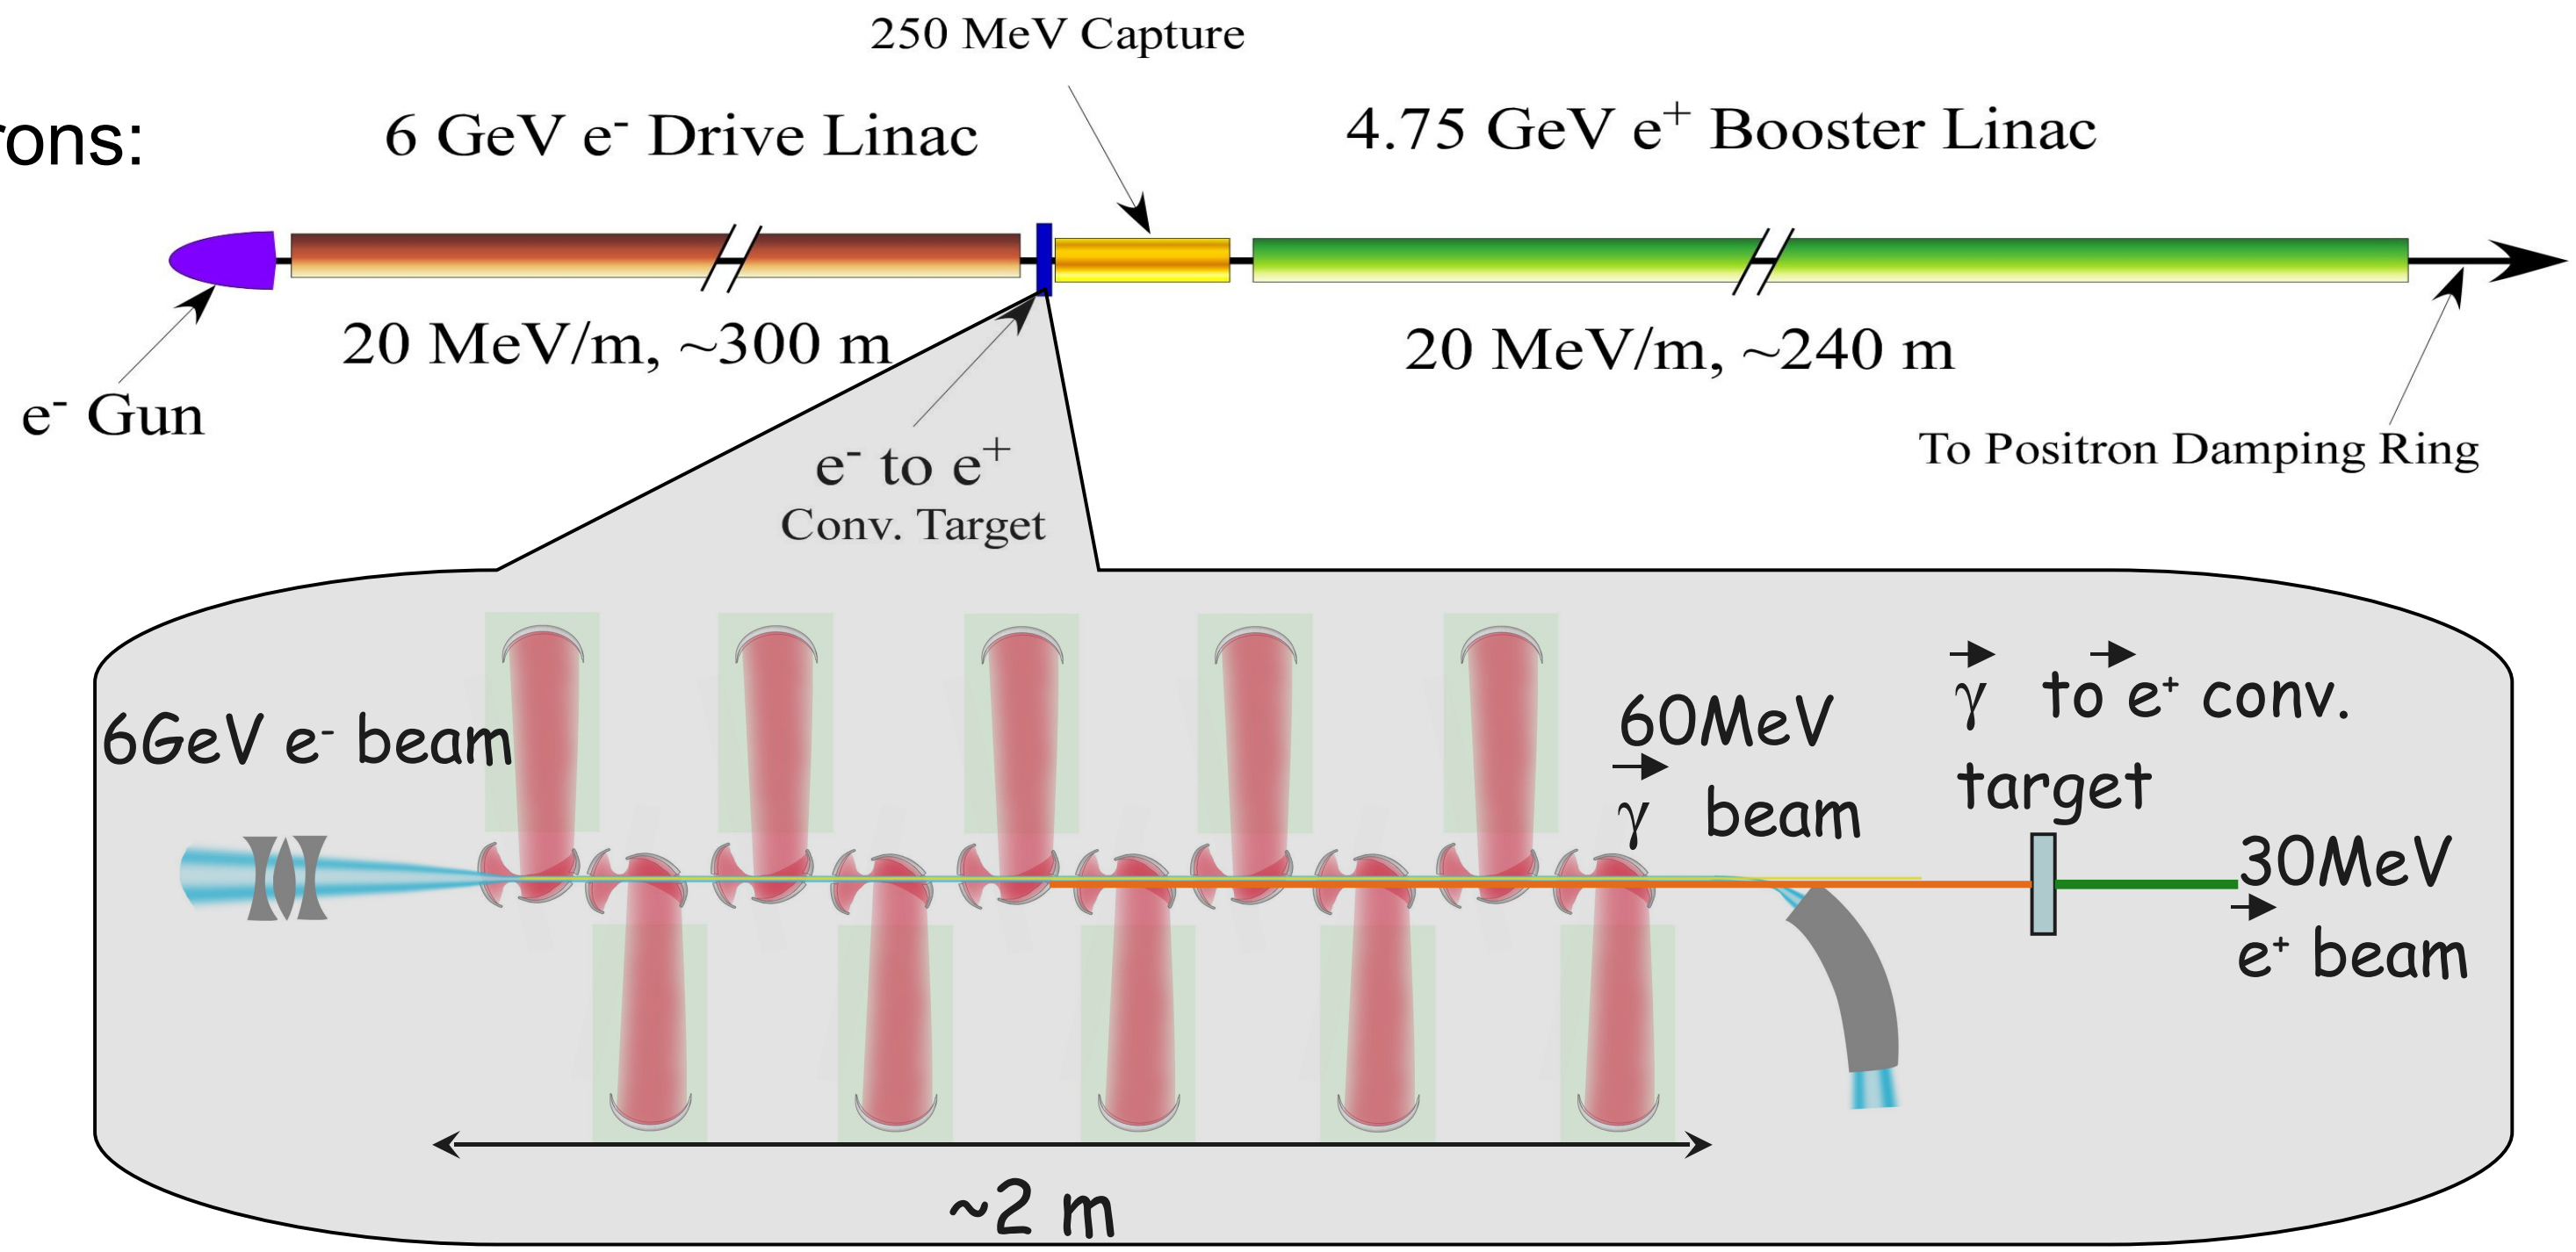

Polarized γ-ray beam is generated in the Compton back scattering inside optical cavity of CO_2 laser beam and 6 GeV e-beam produced by linac.

First tests of the laser cavity

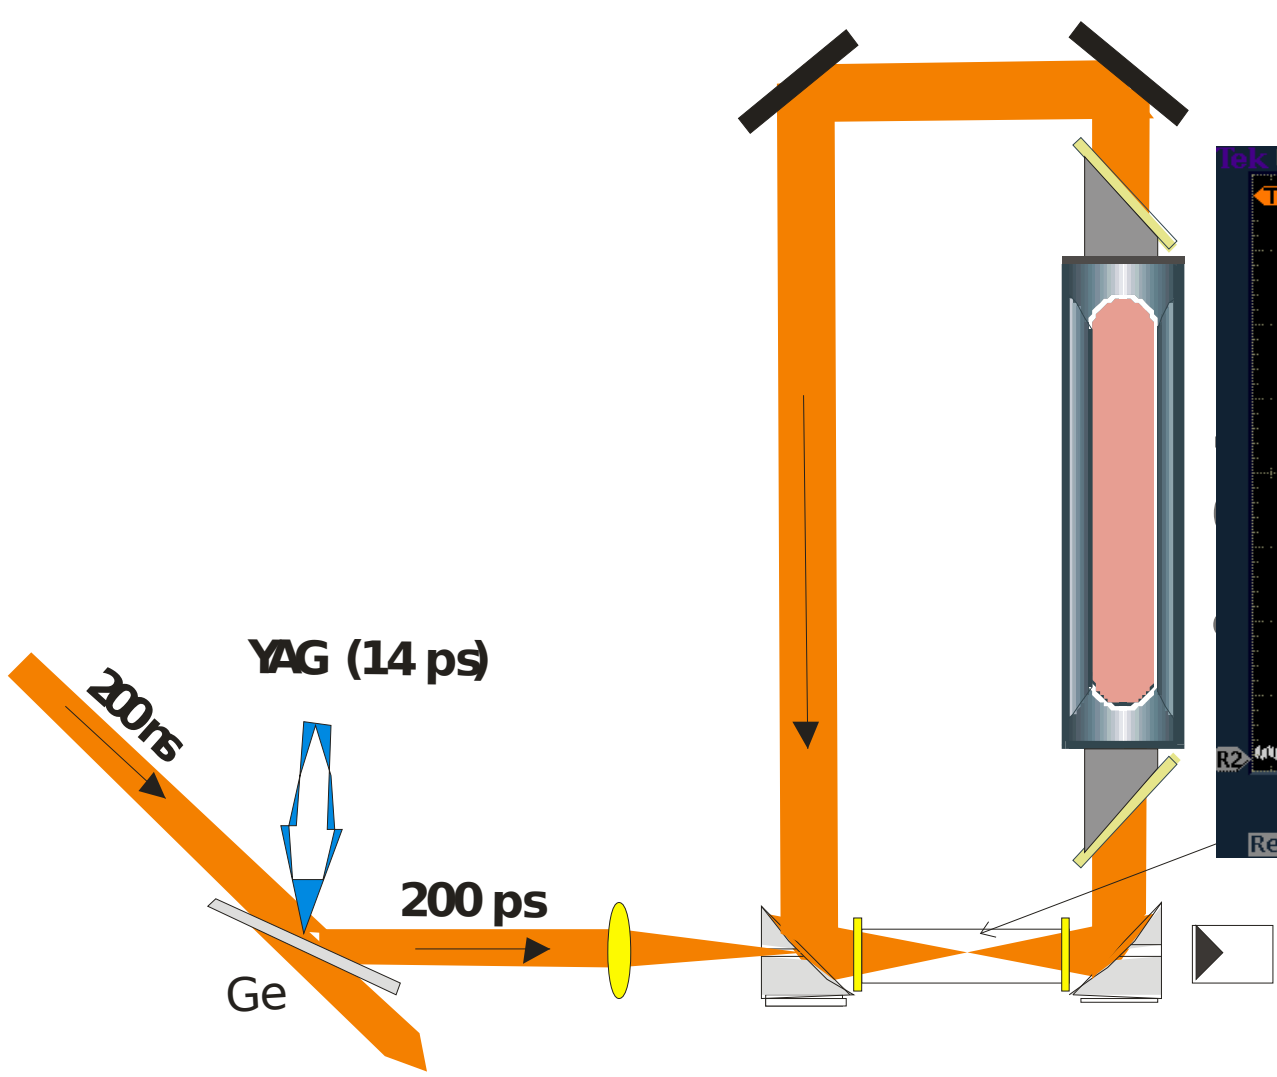

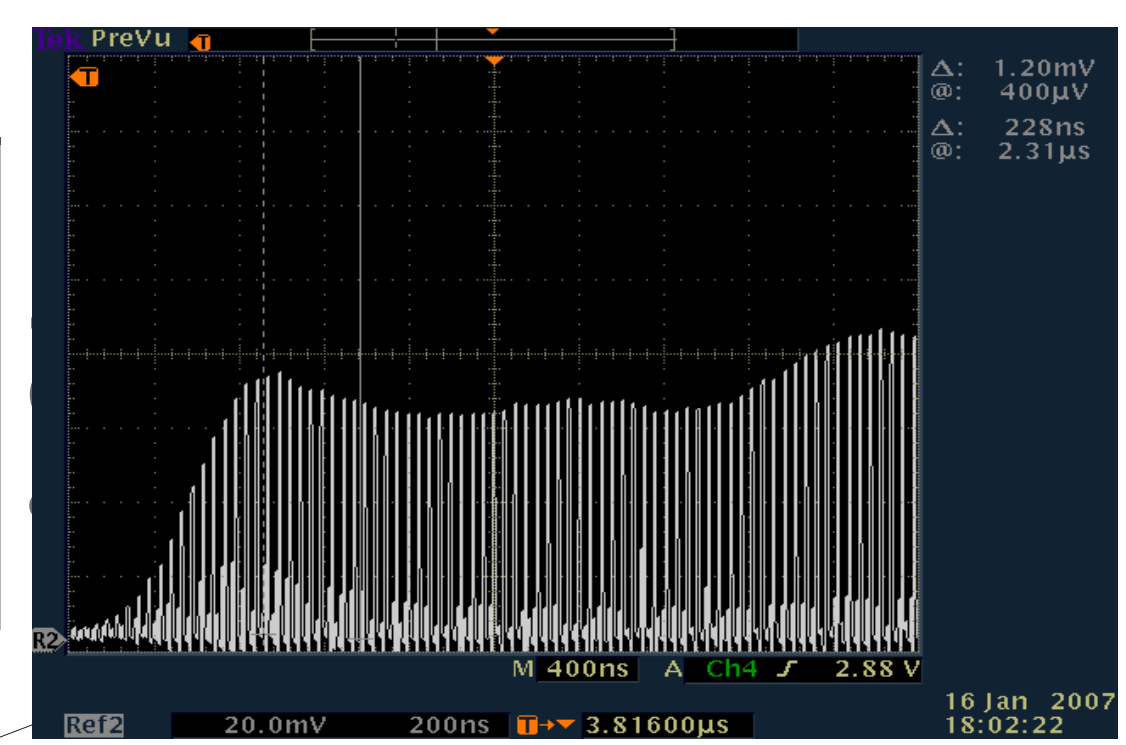

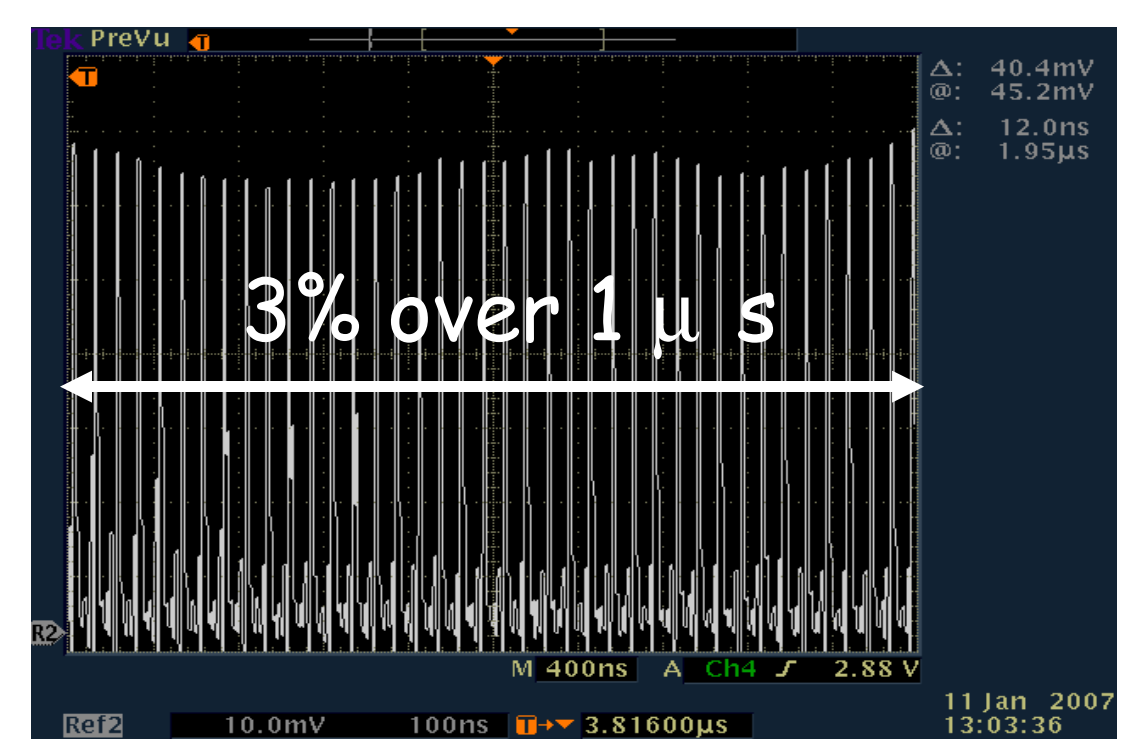

Pulse splitting problem

Amplification band

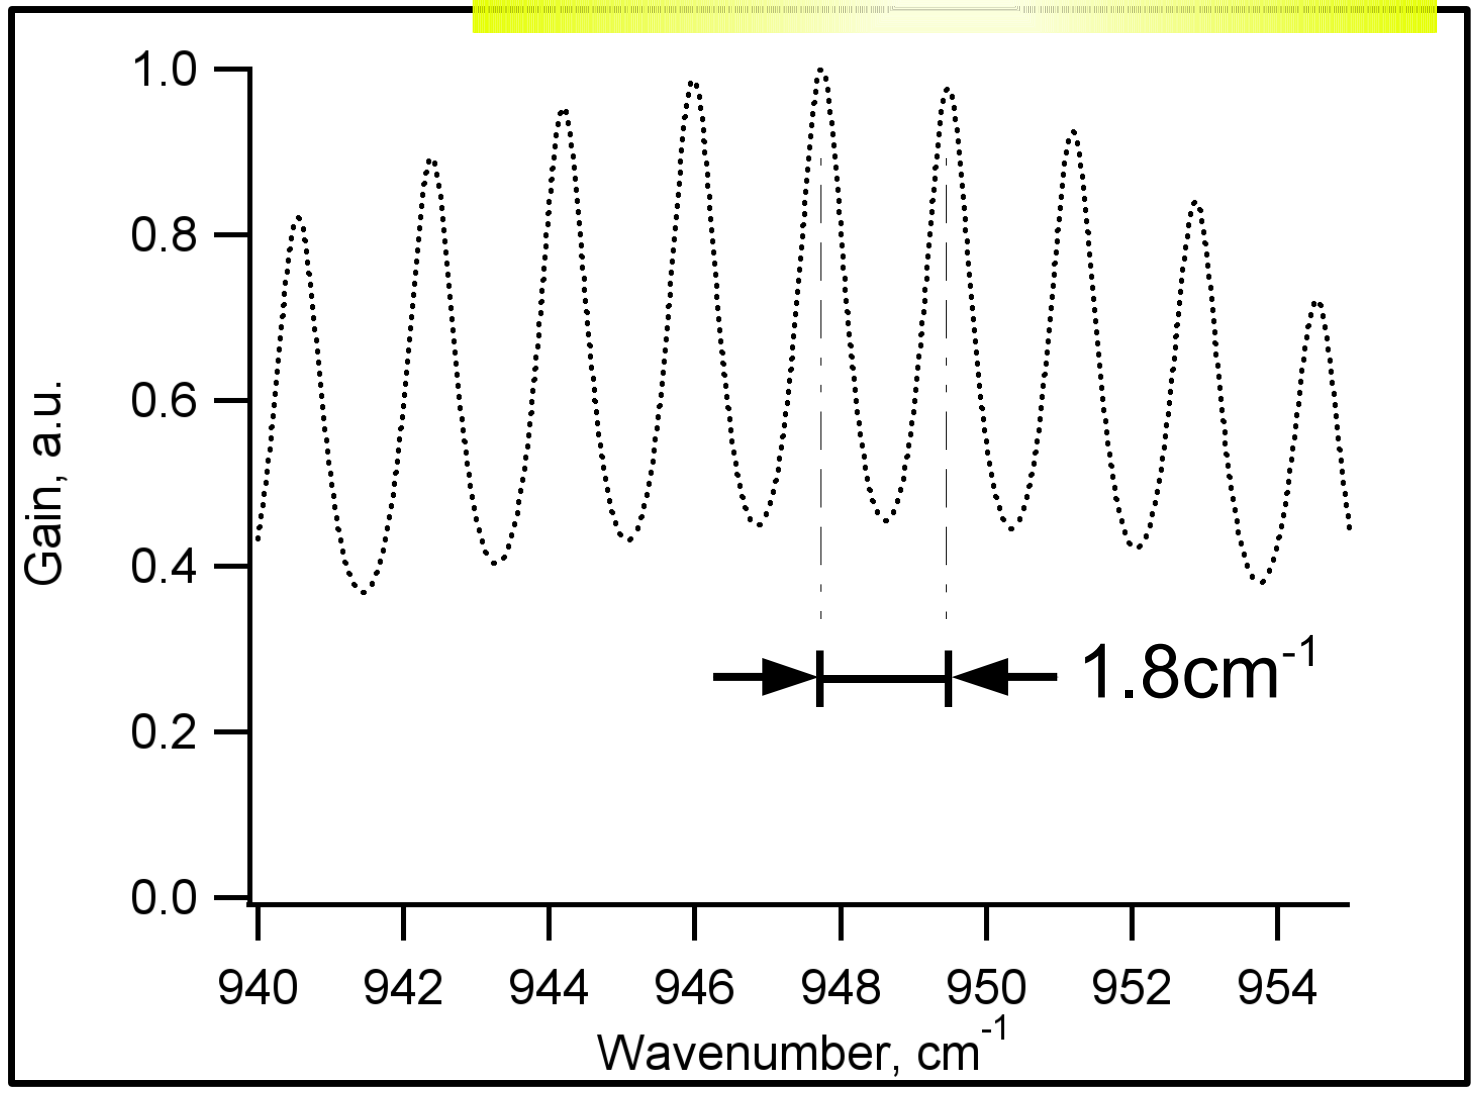

Case shown:

Pulse length:	5 ps (fwhm)
Gas pressure:	7.5 atm
Branch:	10P (10.6 μm)
Amplification:	1000x

Spectra

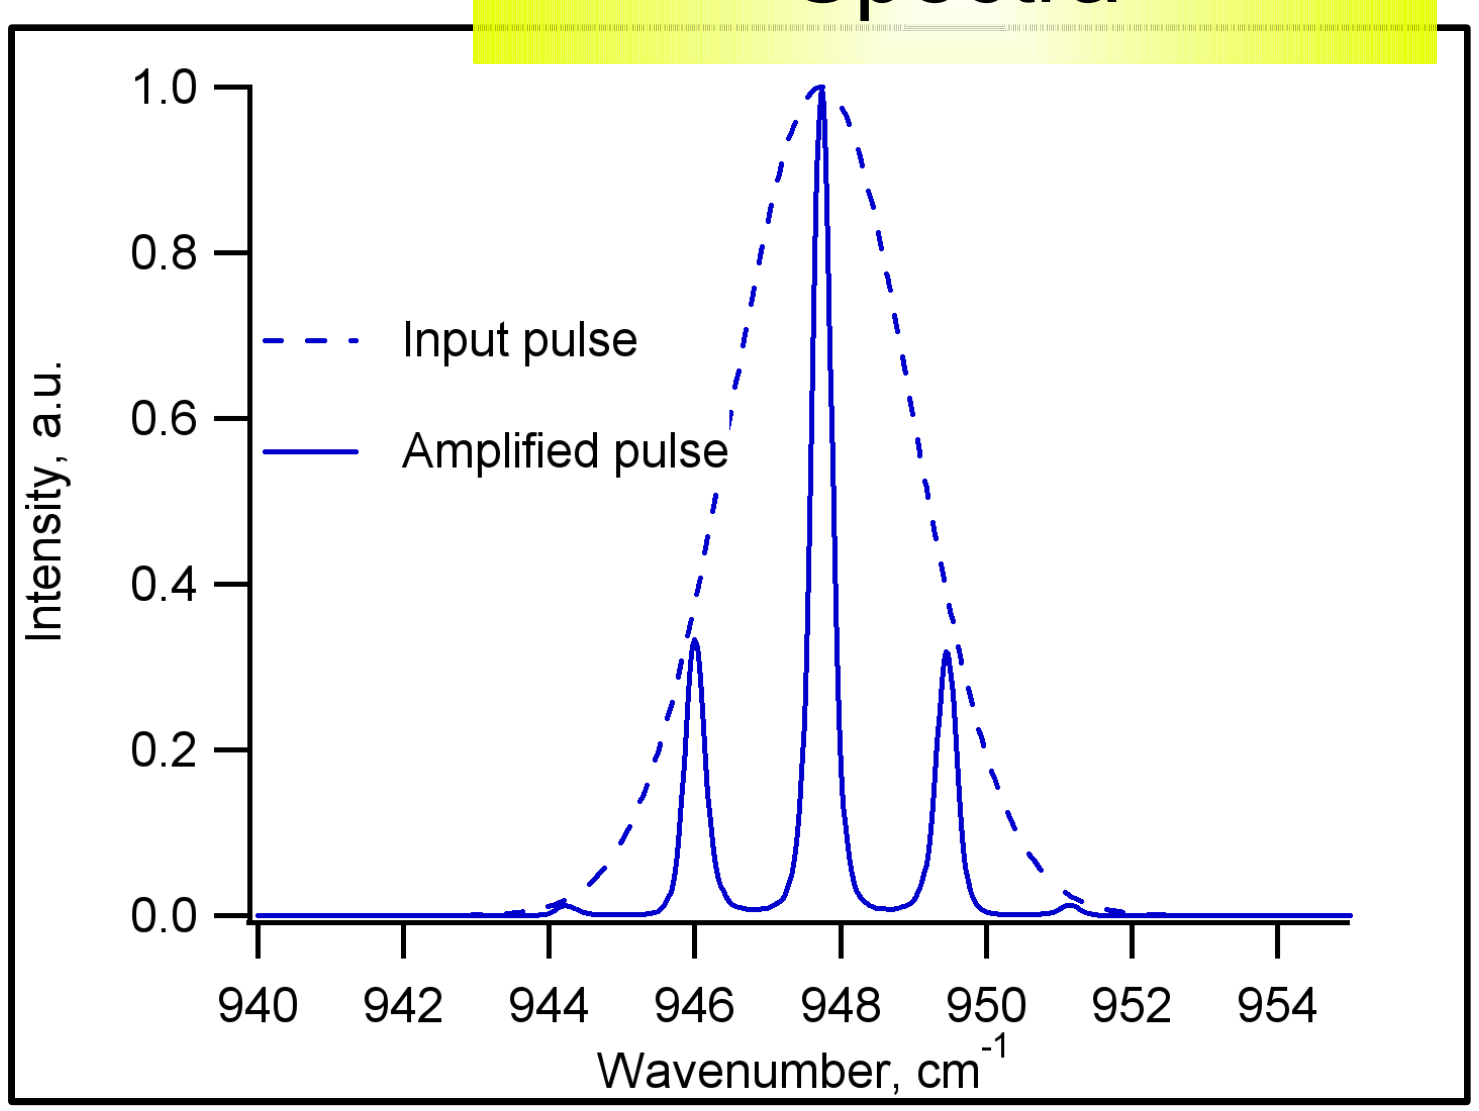

Fourier transform.

Time profile

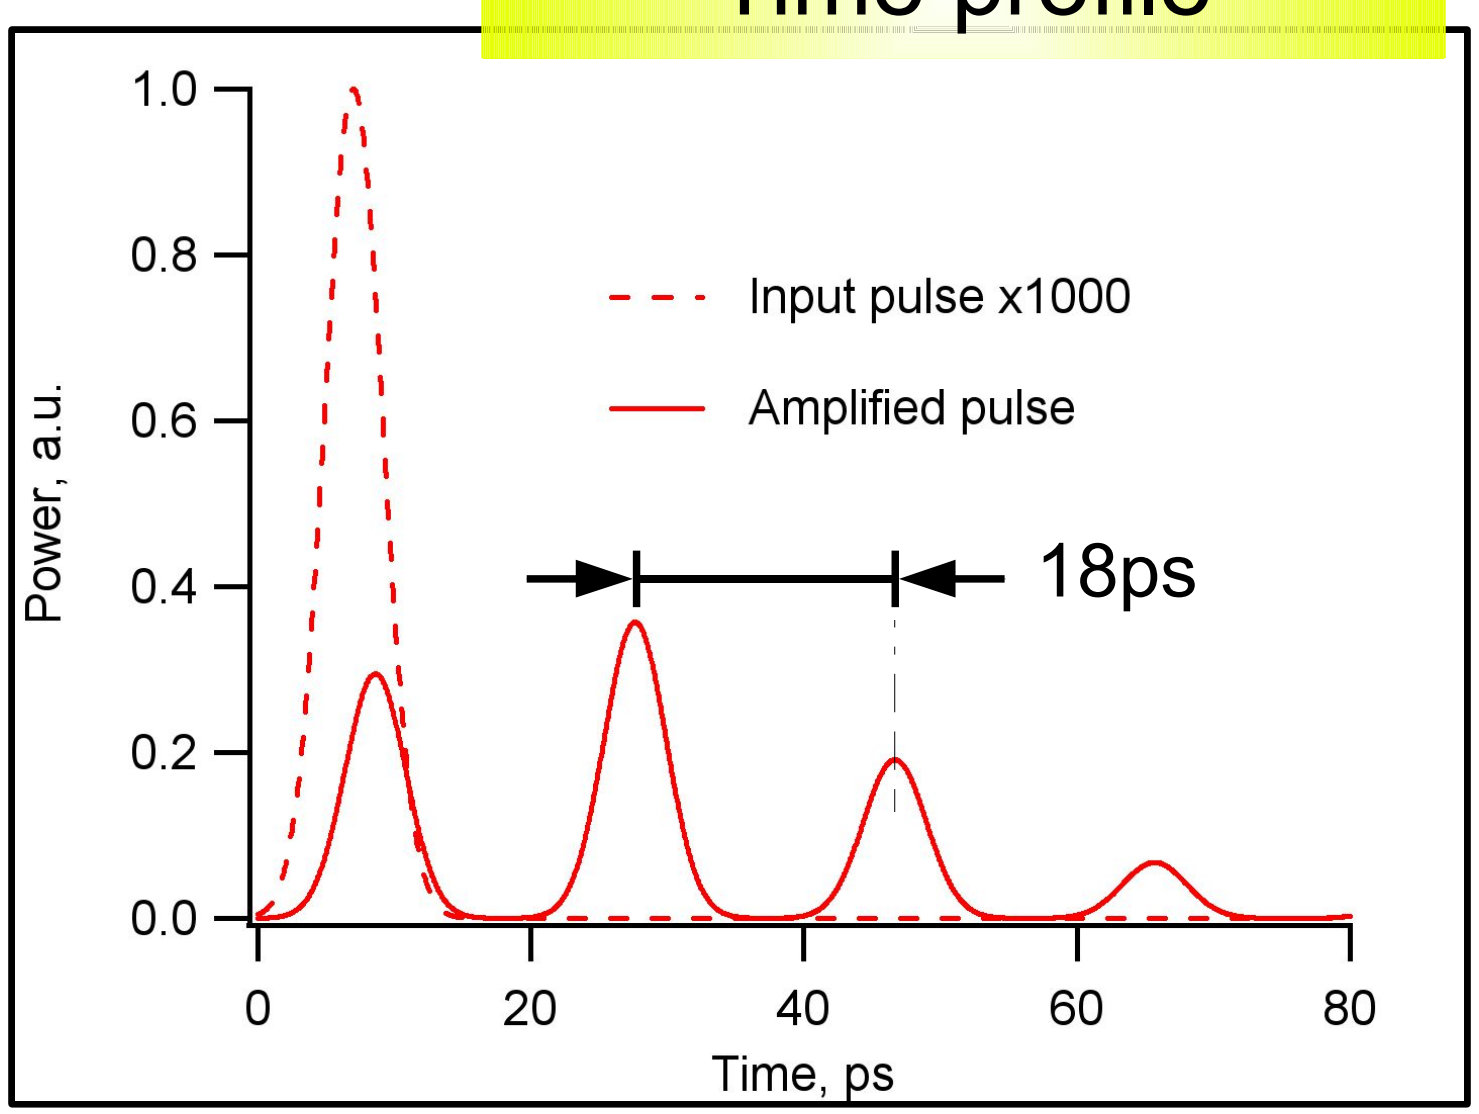

Computer simulations: multipass dynamics

- Pressure:
  5 atm
- Pulse energy:
  1 J
- Pulse length:
  5 ps (fwhm)
- Roundtrip time:
  12 ns
- Wavelength:
  10.2 μm (R-br.)
- Optical losses:
  5% / pass
- Gas mixture:
  0.5 : 3 : 6.5
- Isotopes:
  $[O^{16}] : [O^{18}] = 0.8 : 1$

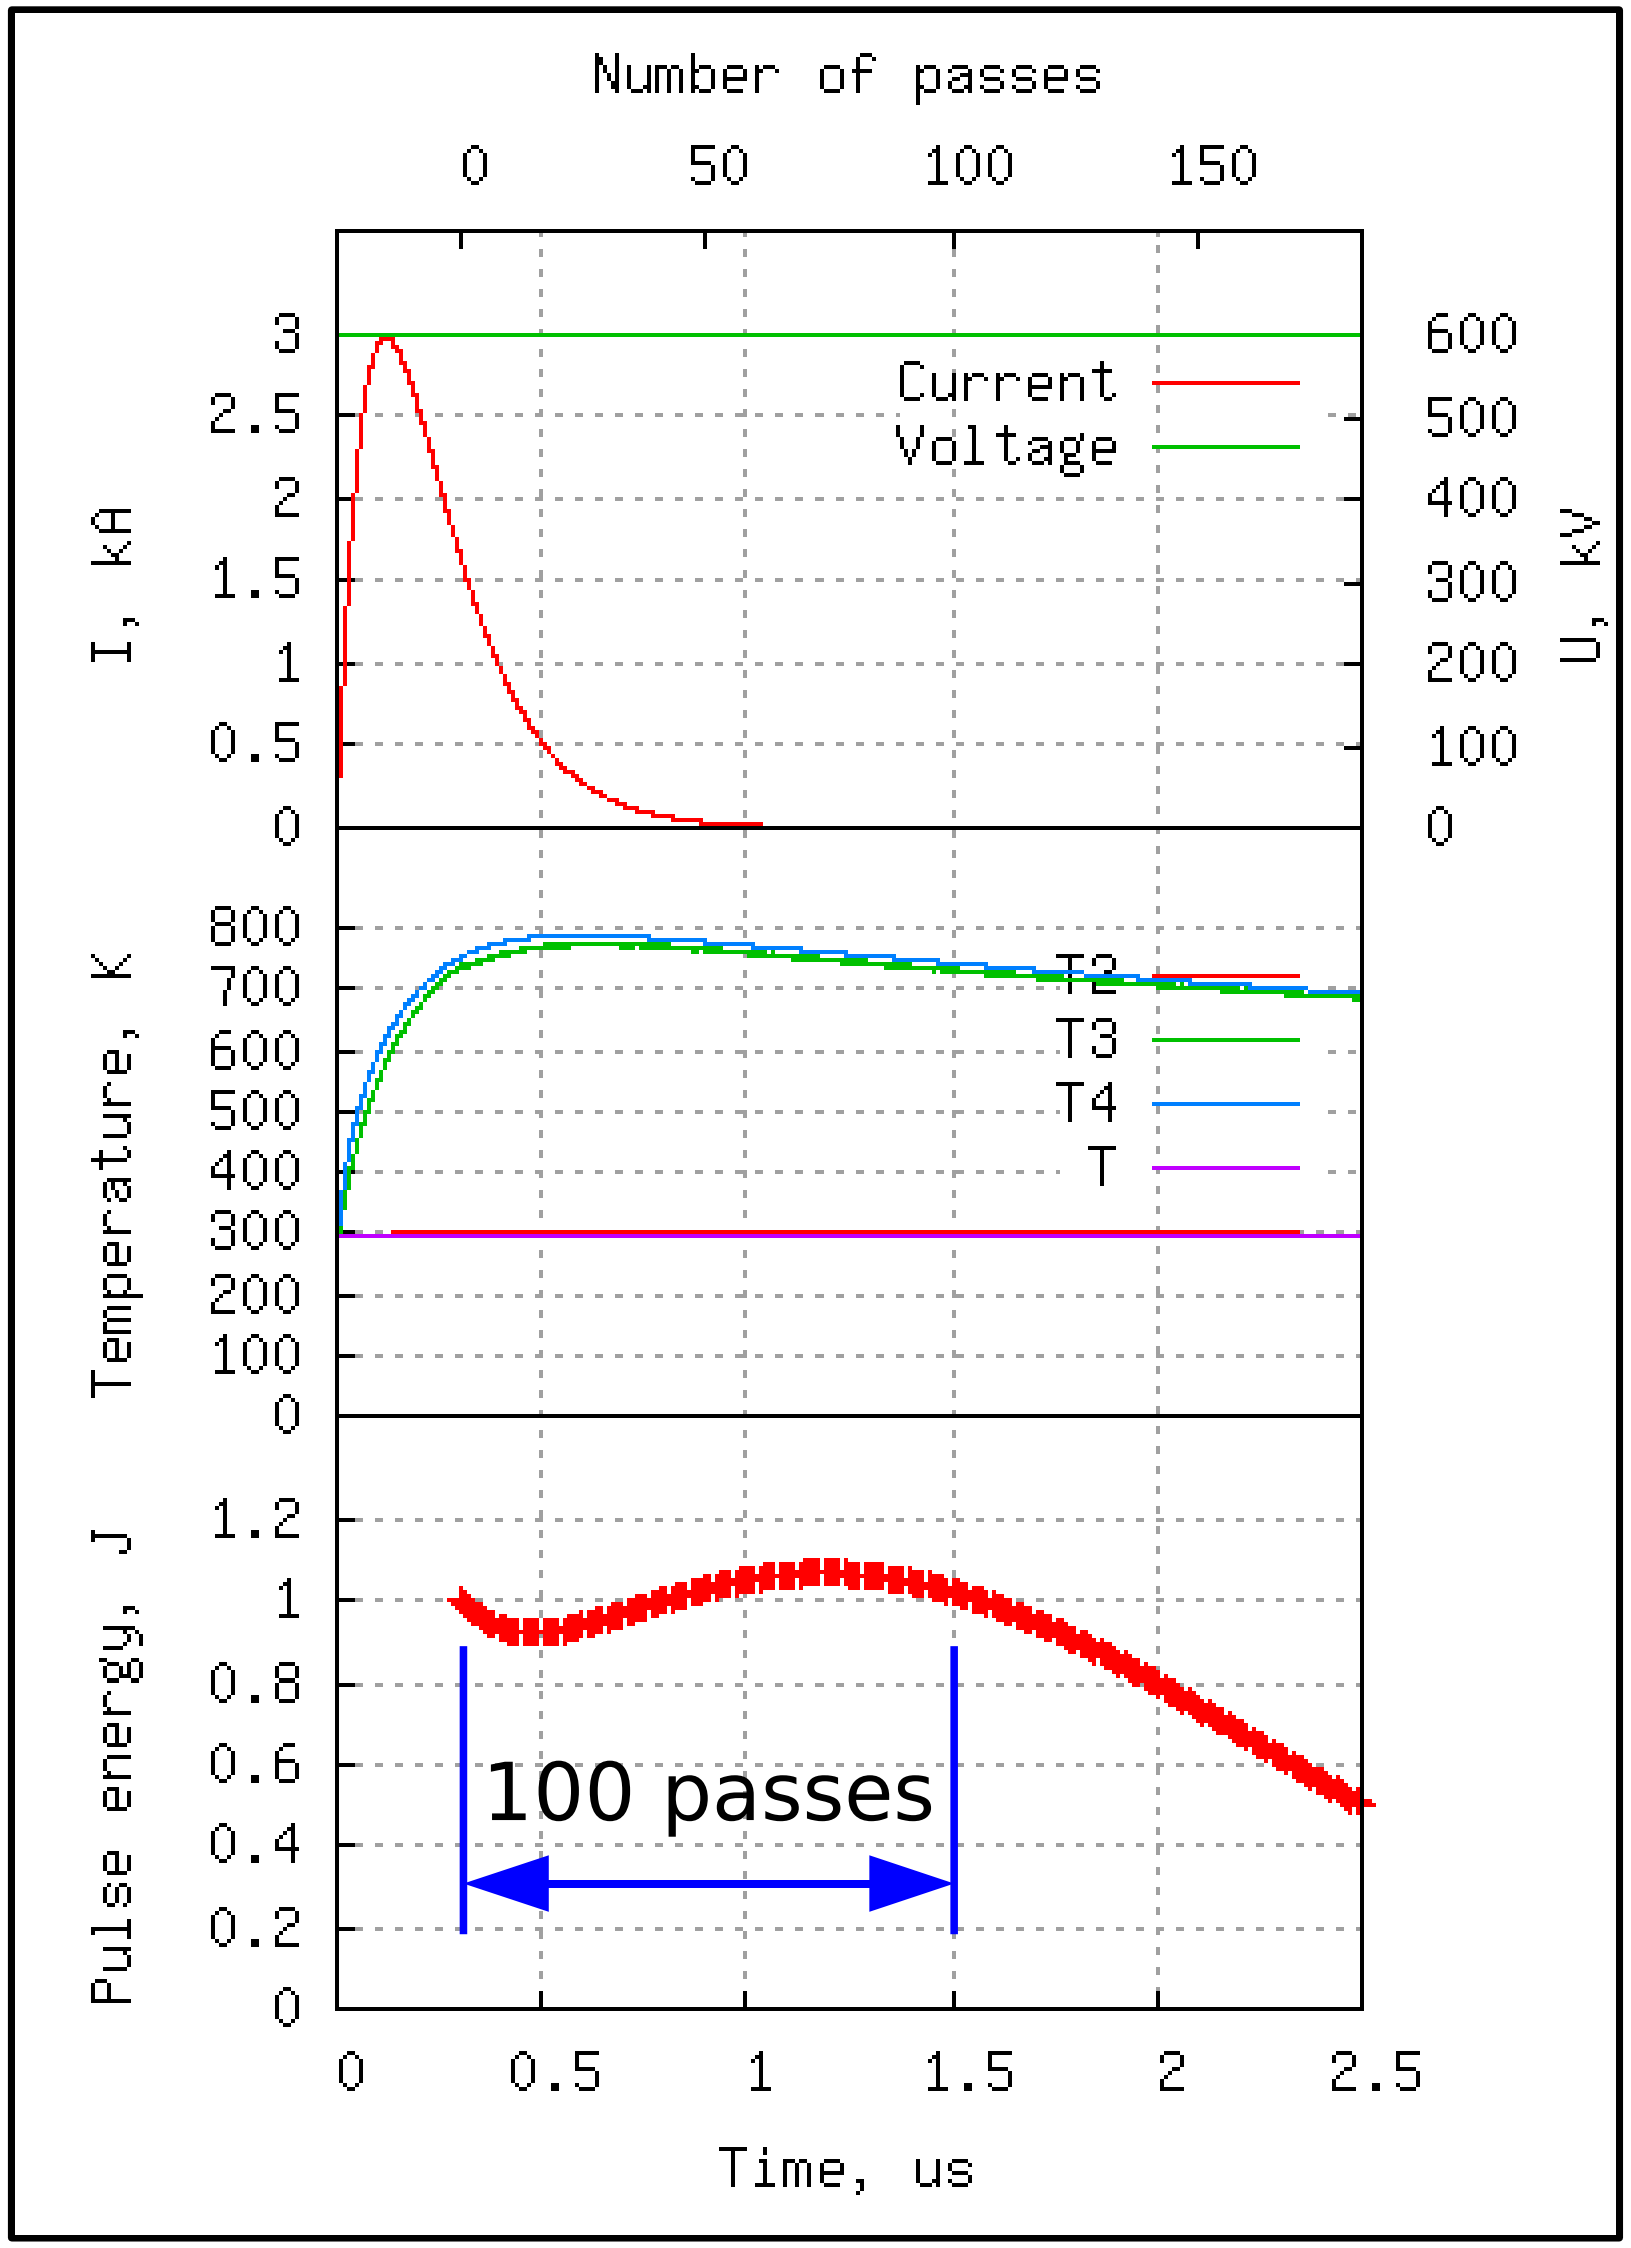

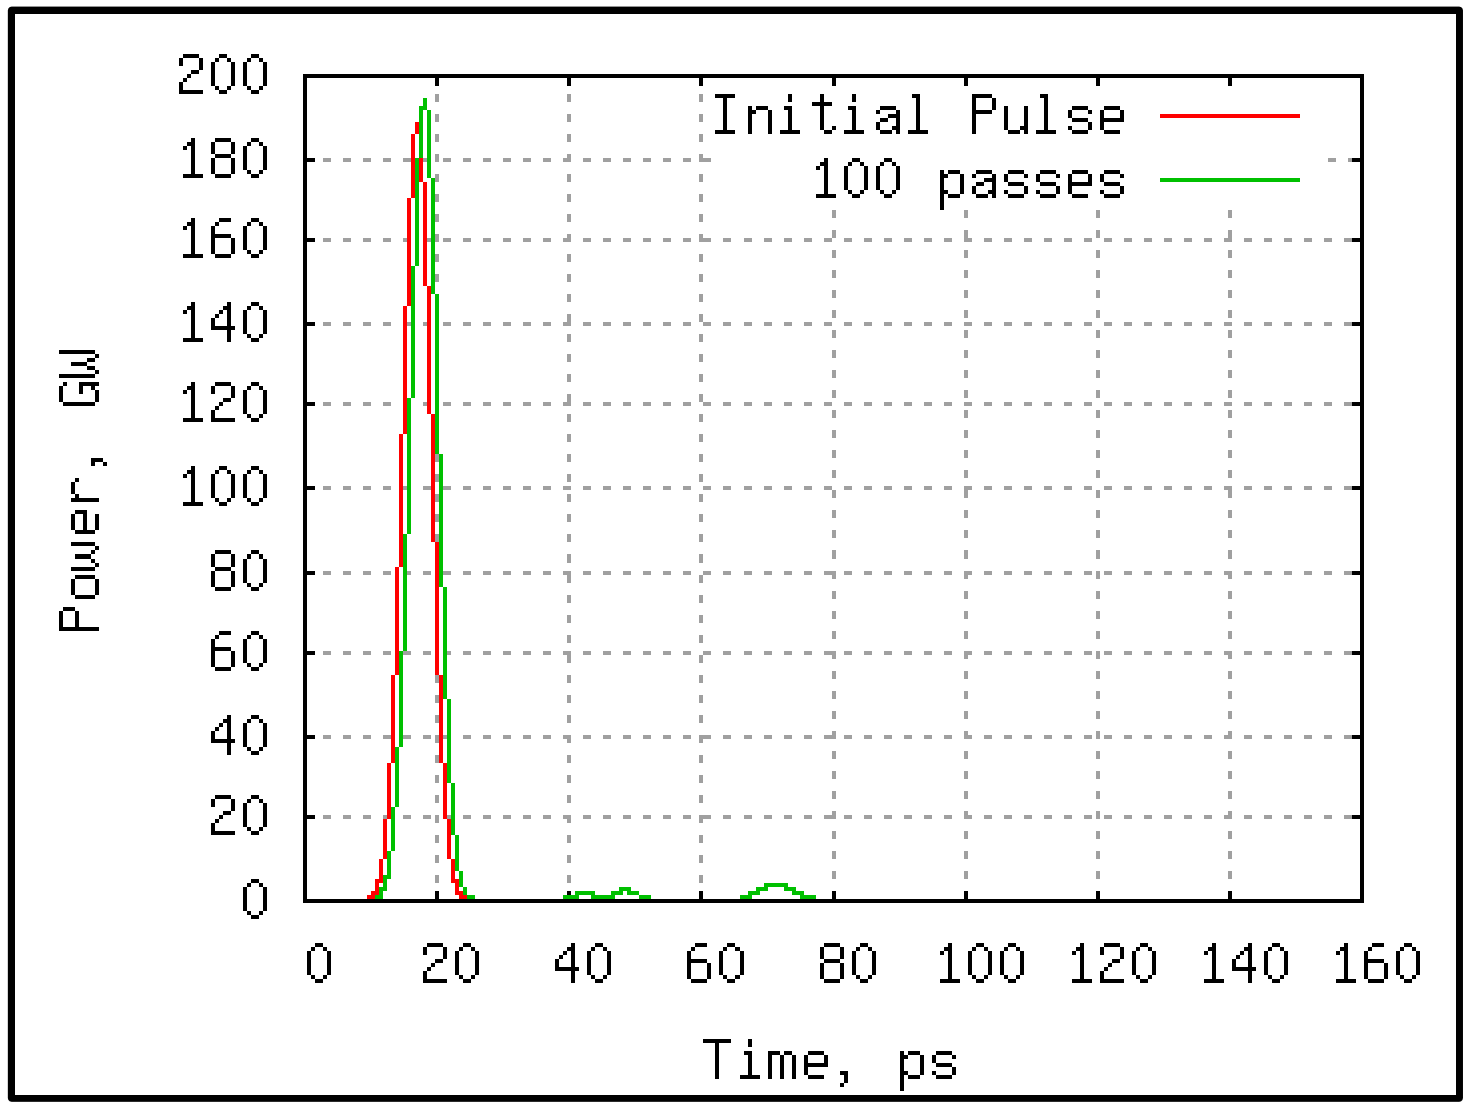

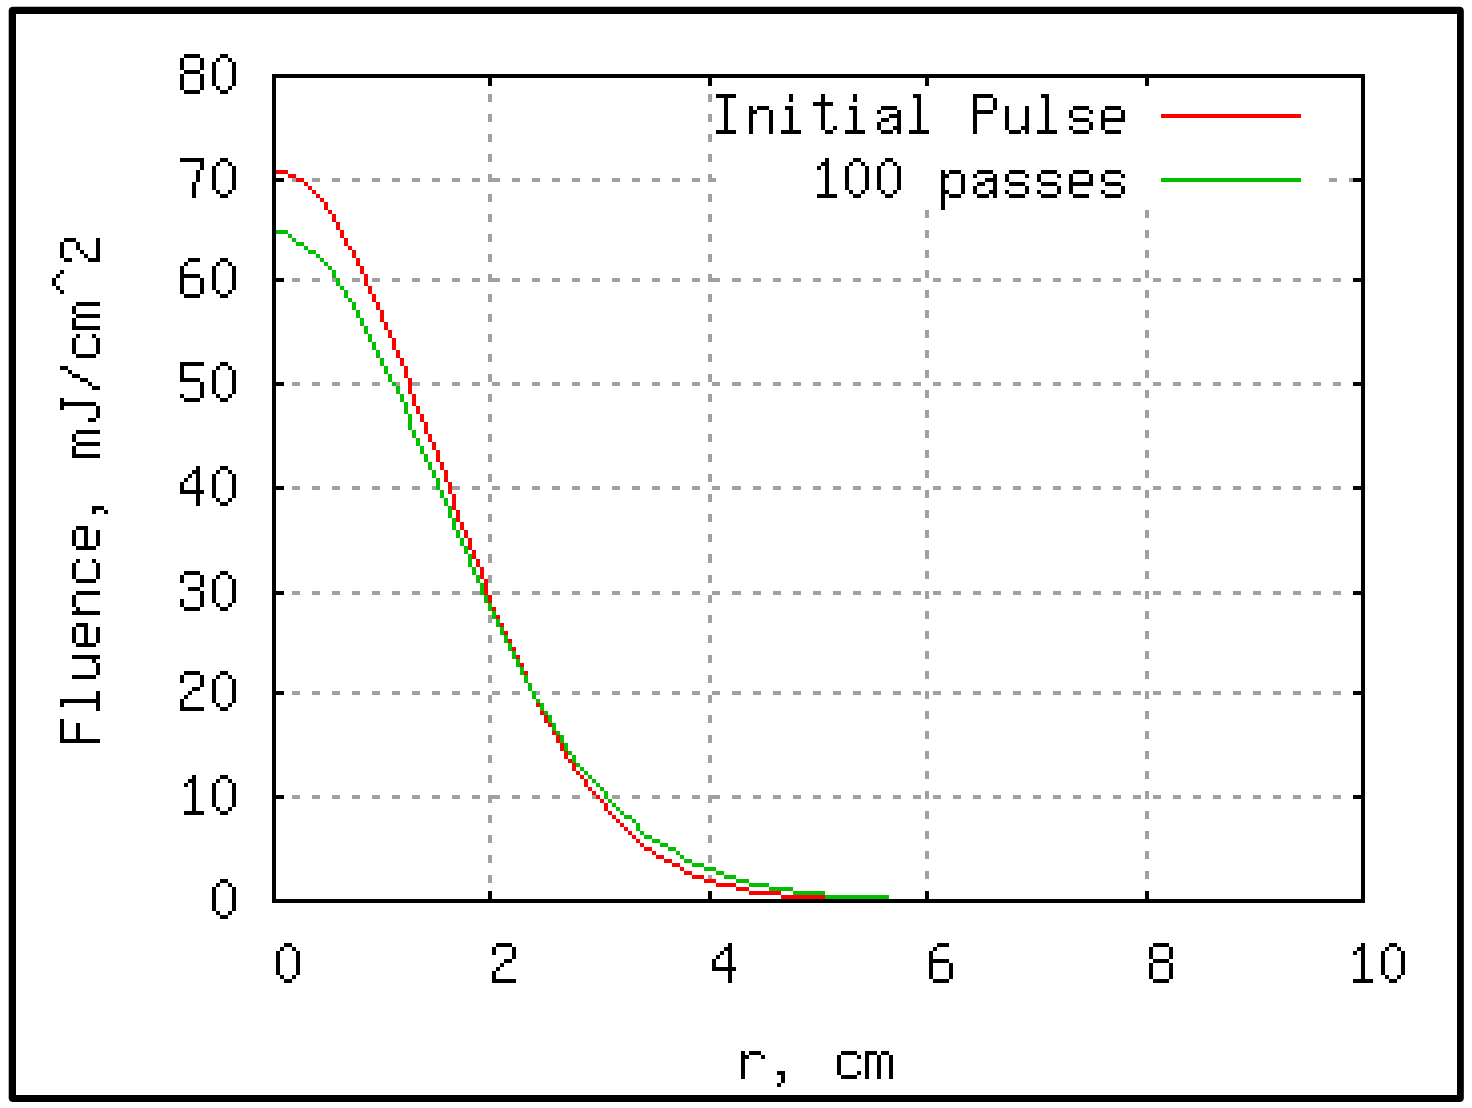

Test I: Pulse injection through a holed mirror

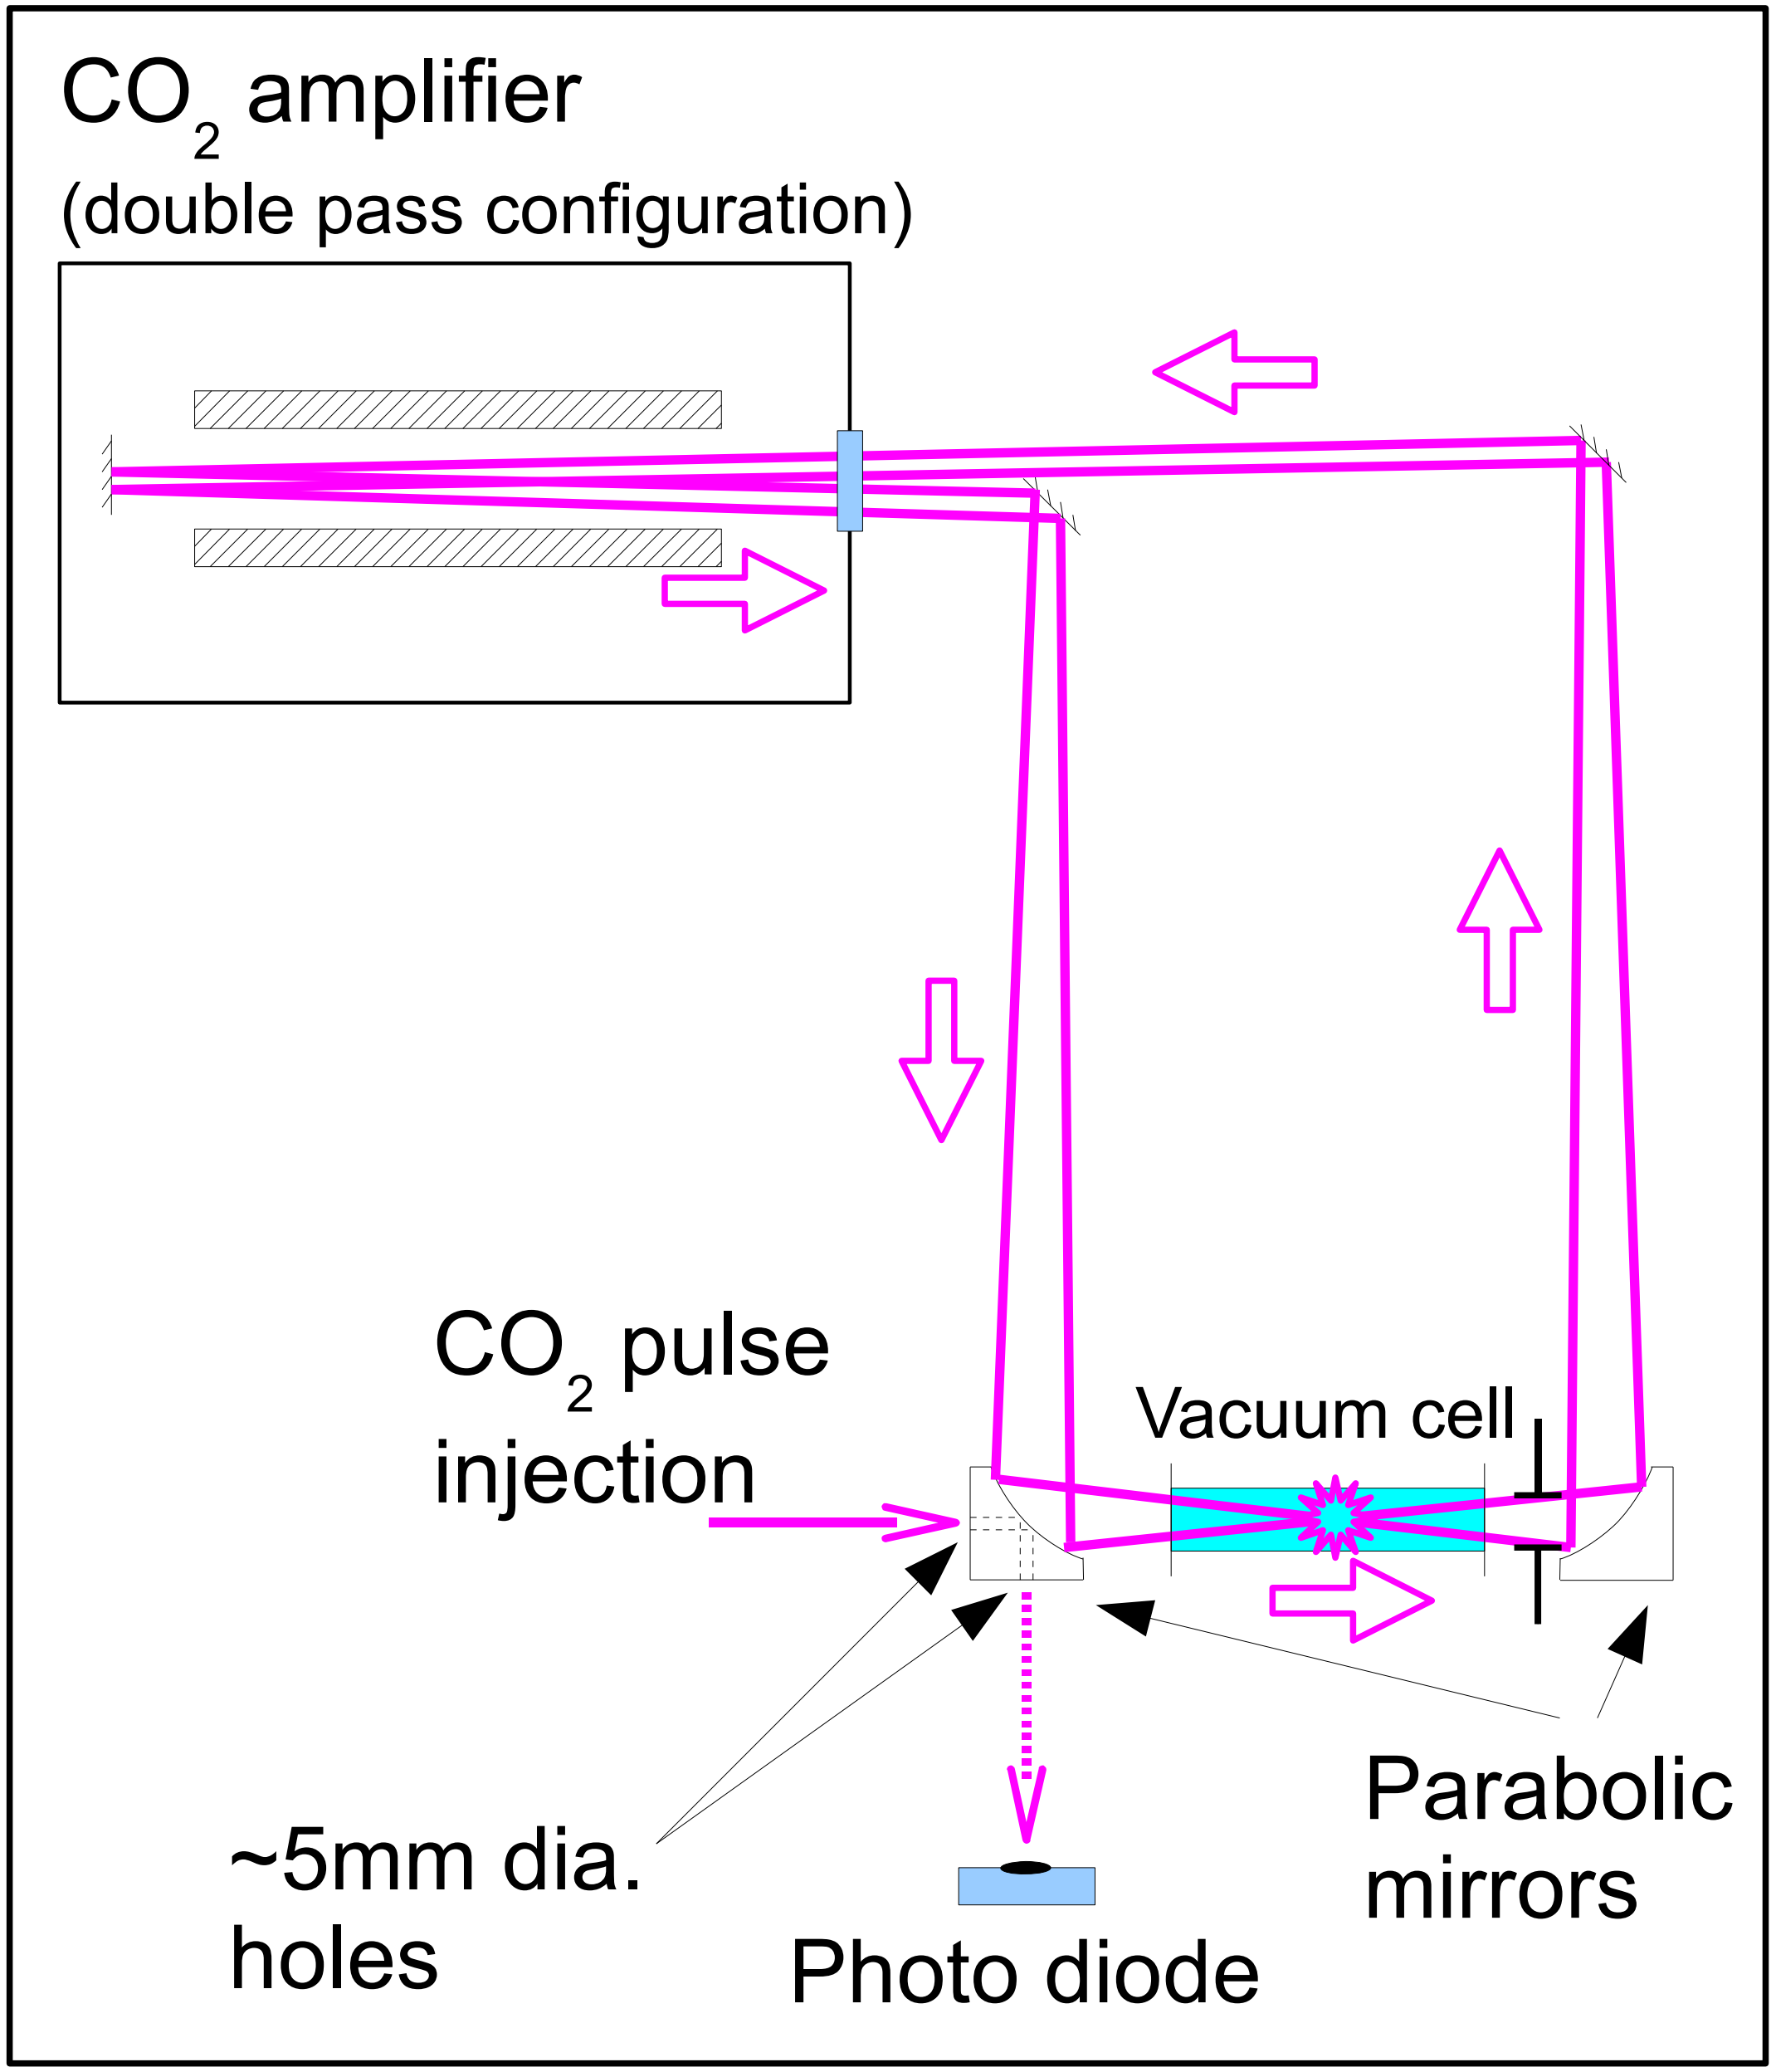

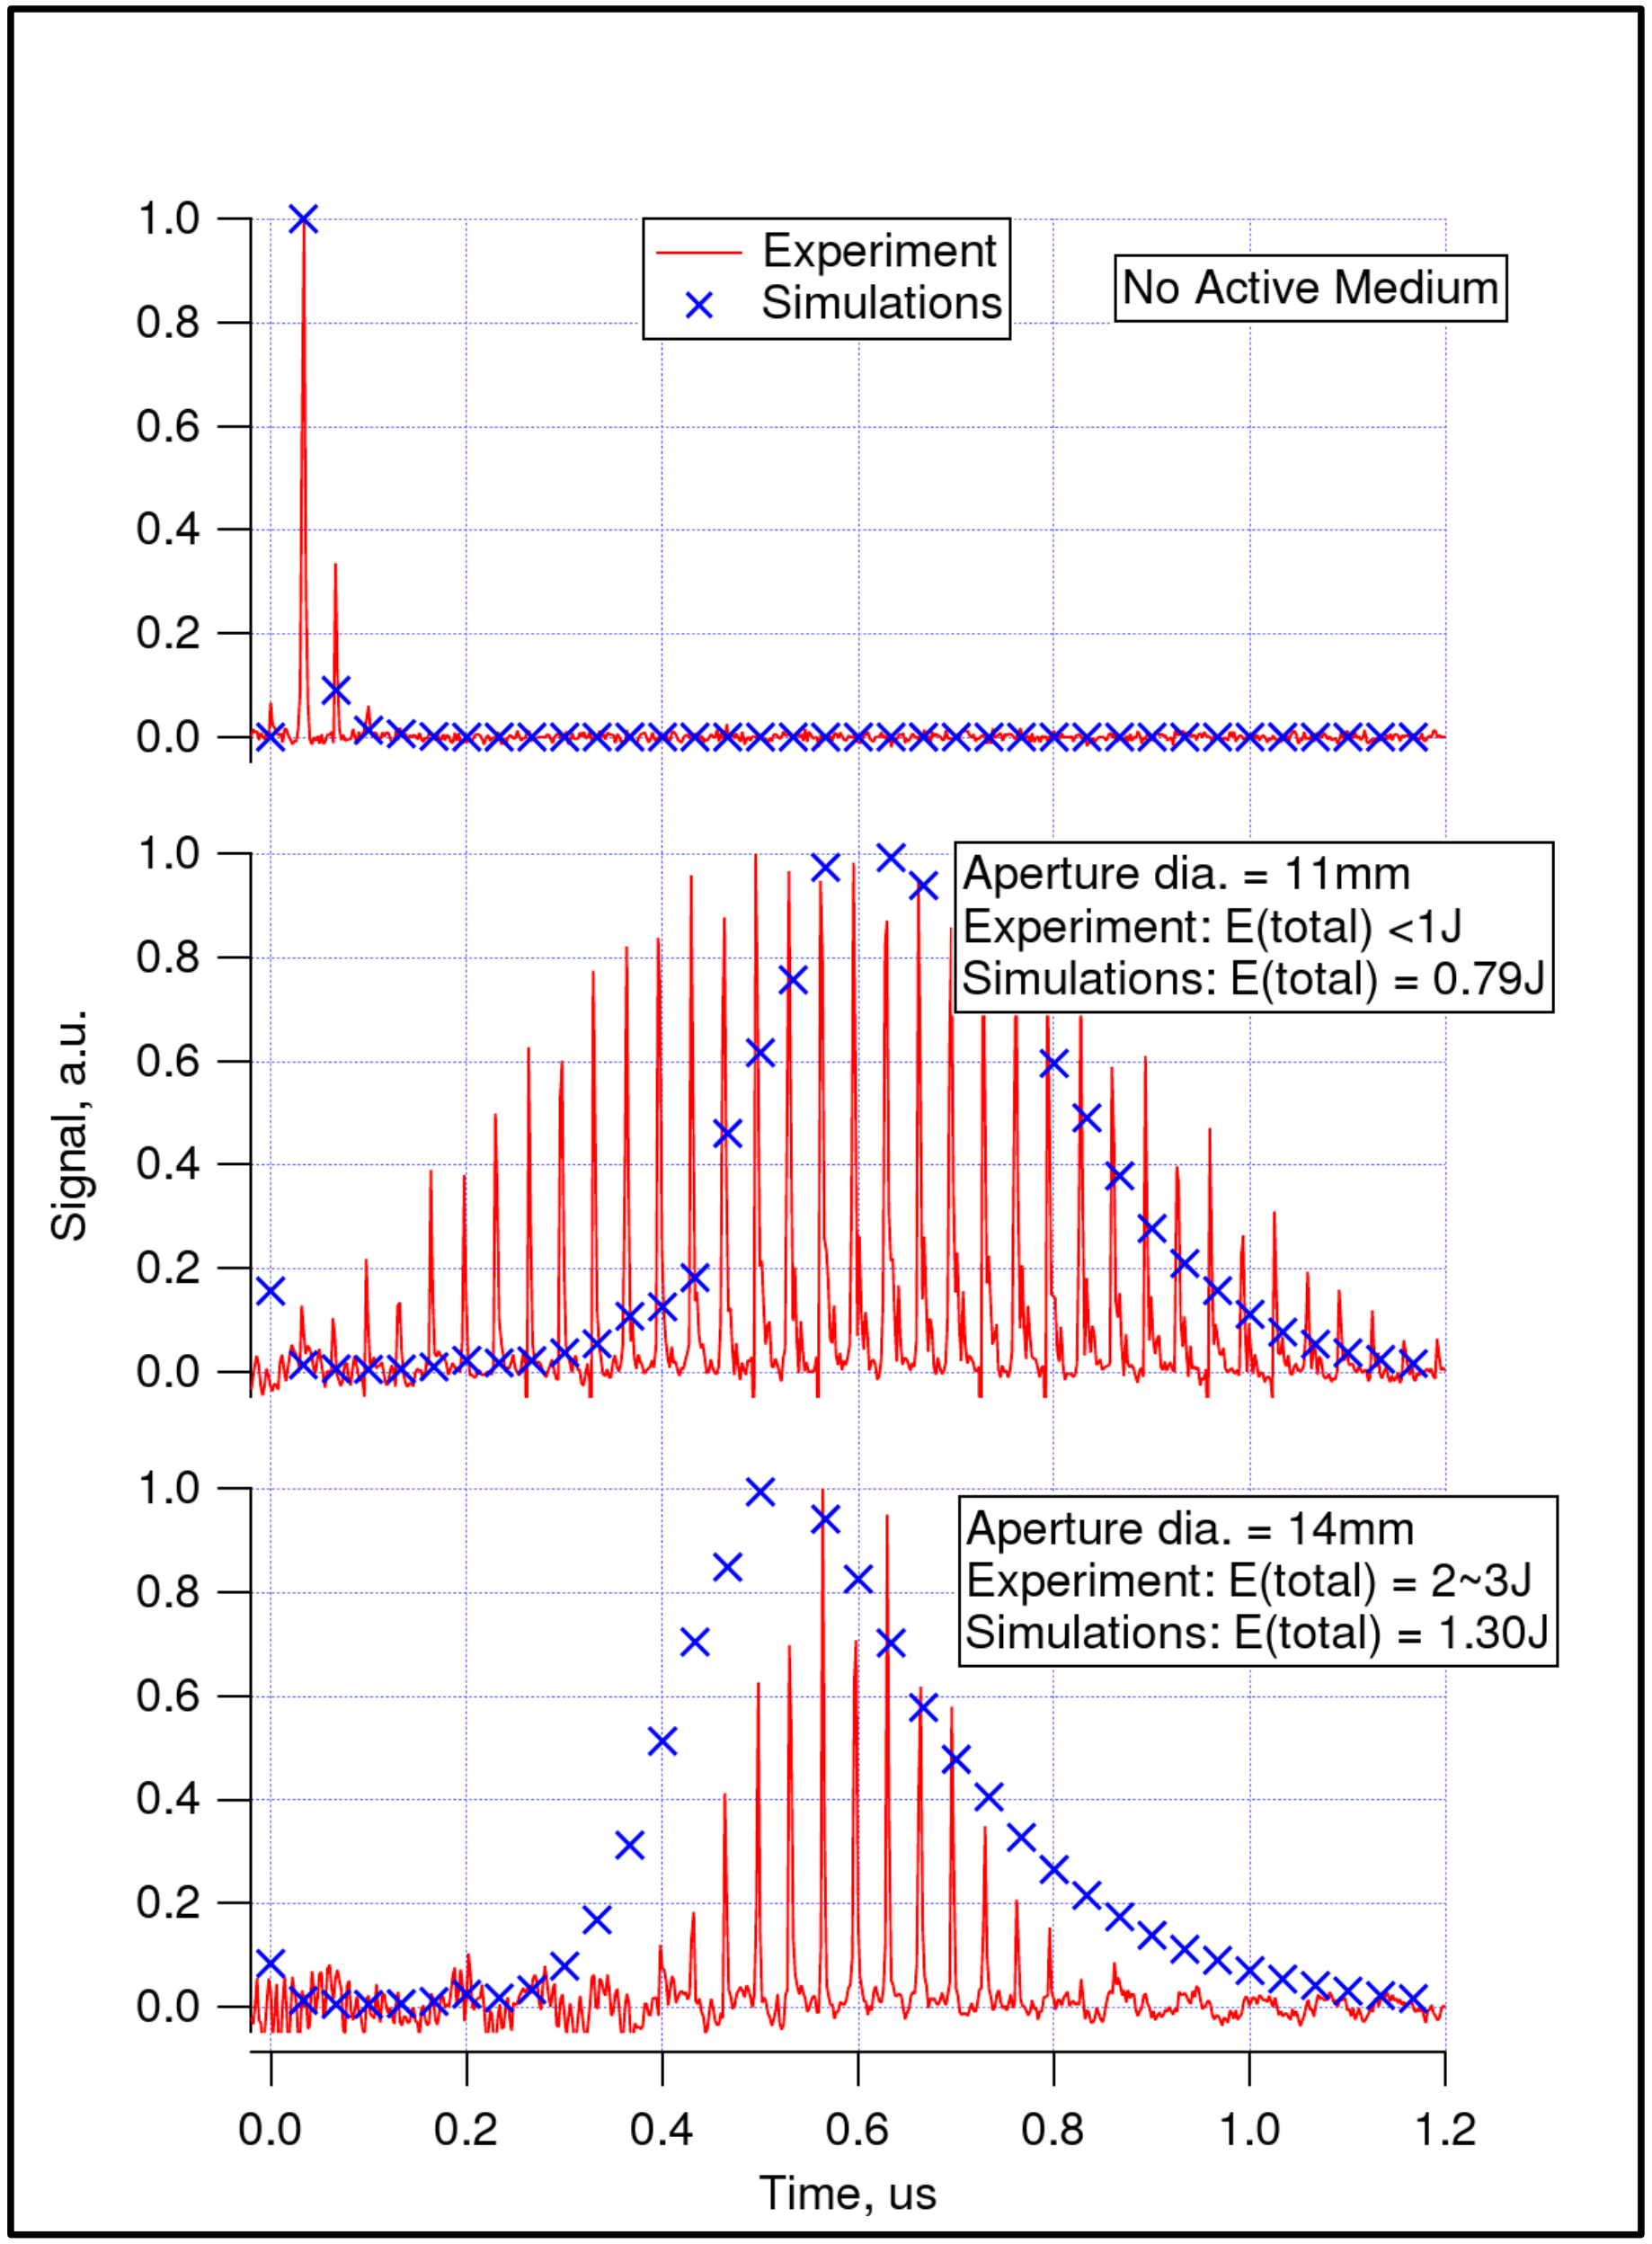

Test II: Pulse injection using a semiconductor switch

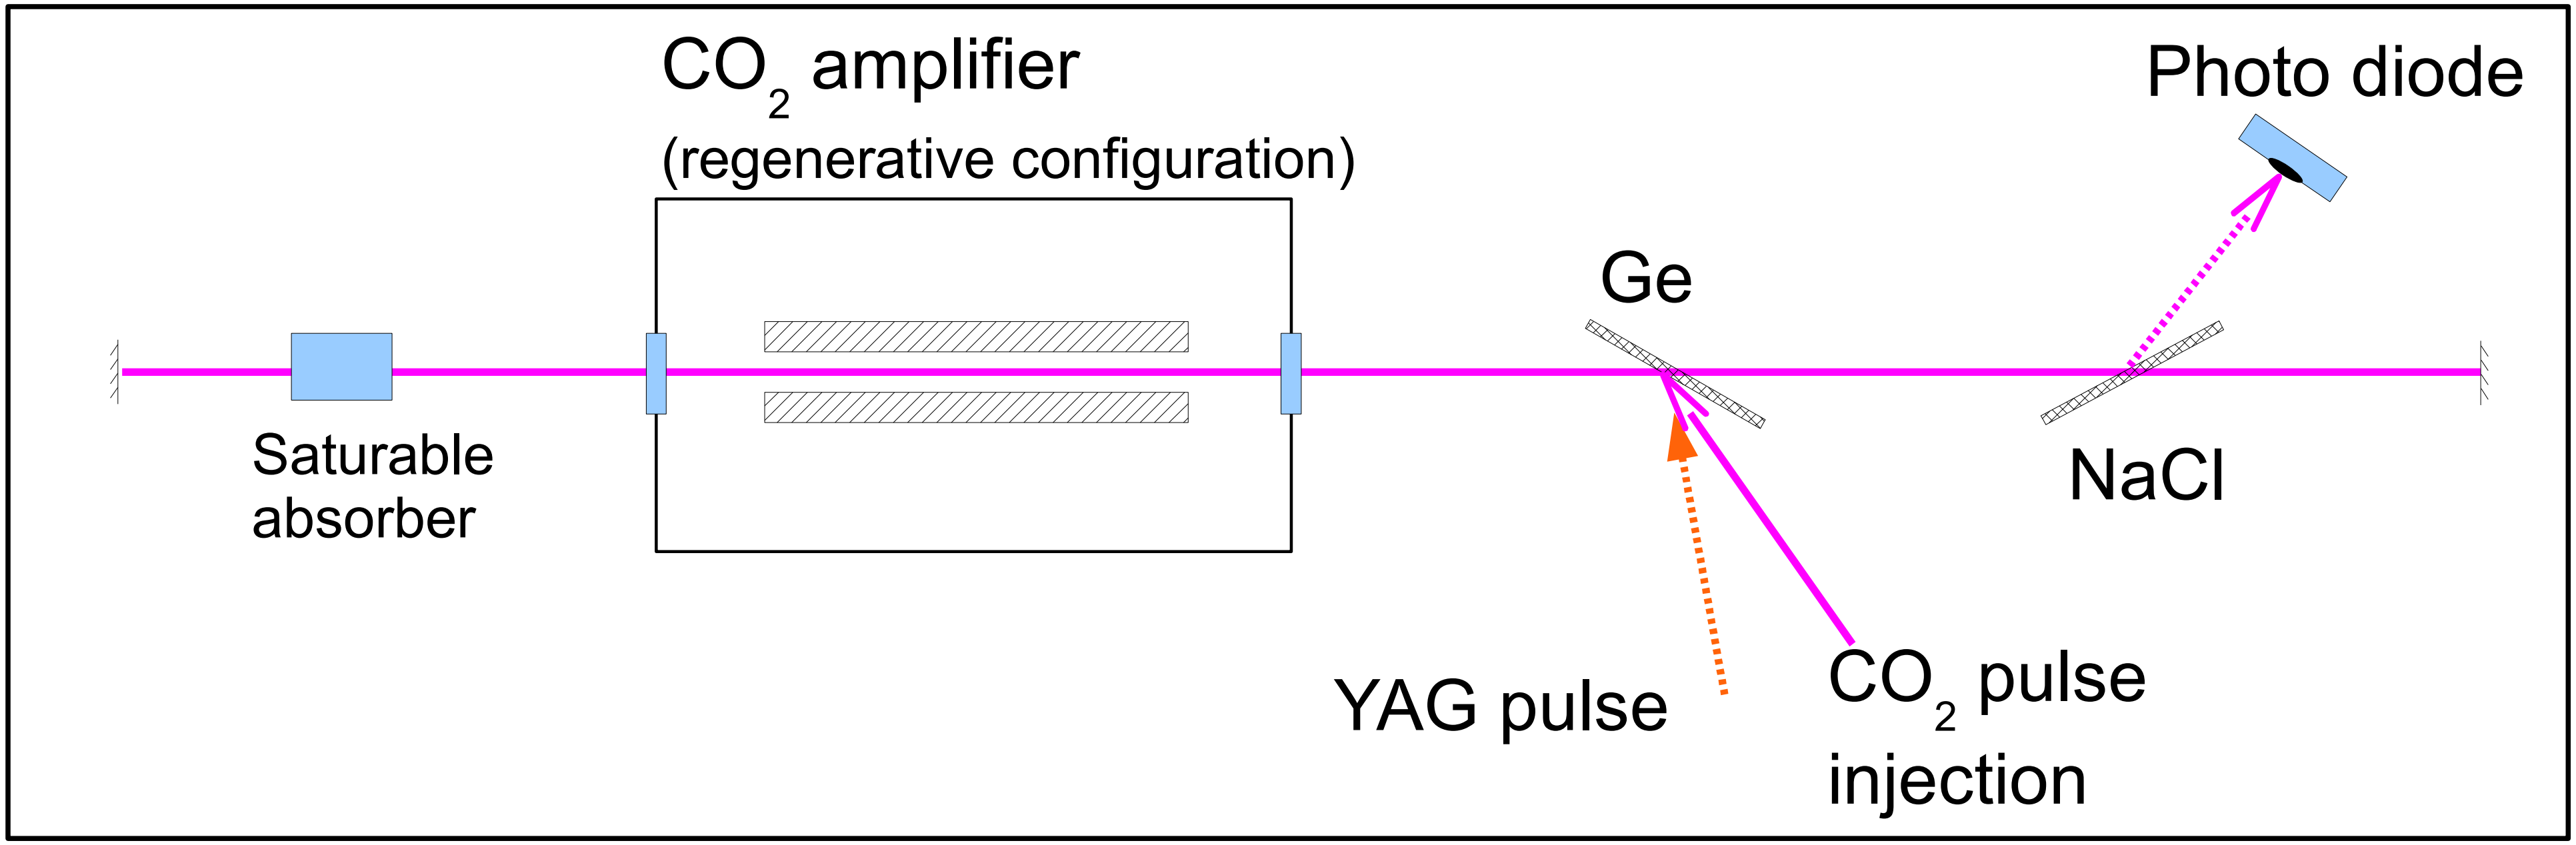

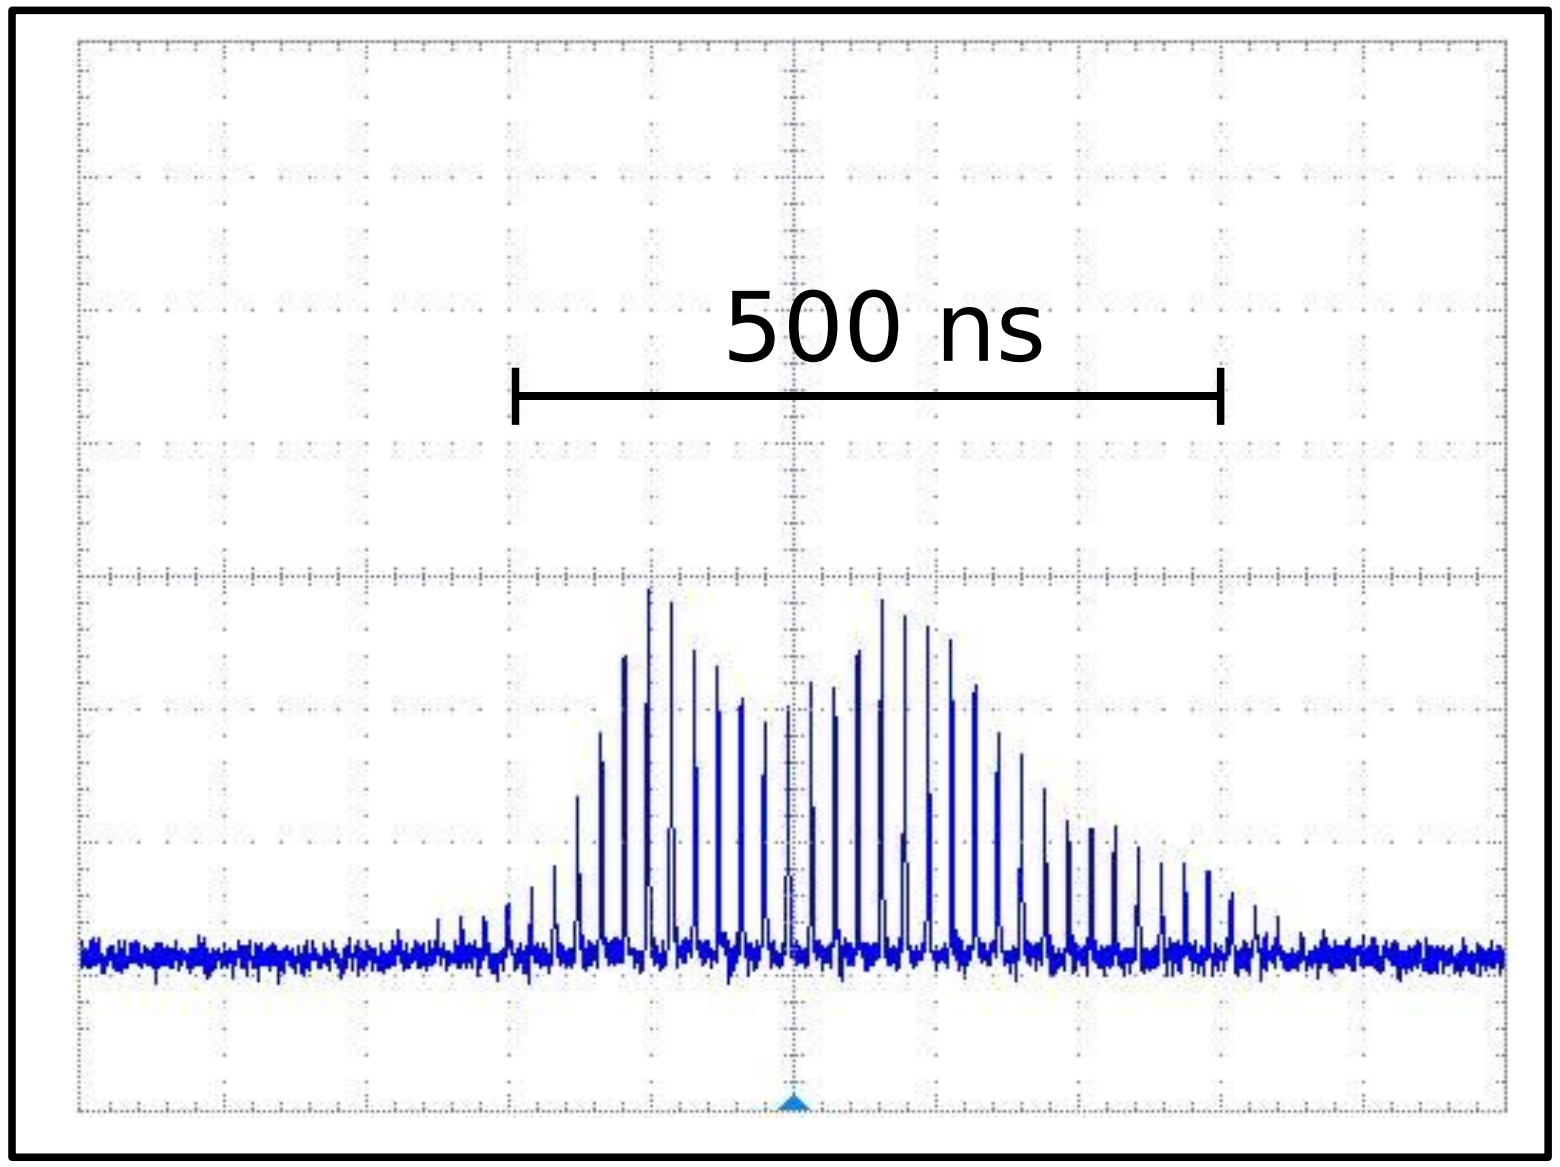

Demonstrated:

- Multipass picosecond CO_2 laser pulse amplification and energy sustain
- Pulse injection *via* semiconductor switch
- Qualitative agreement between experiment and computer simulations

Summary and conclusions

- Concept of CO_2 laser based high-repetition rate γ-source is developed and tested
- Preferred regimes of picosecond pulse amplification in multipass cavity are determined using a newly developed simulation software
- Advantage of isotopic CO_2 mixture is demonstrated in computer simulations
- Qualitative agreement between proof-of-principle experiment results and computer simulations is achieved