From HERA to future electron-ion colliders

Vadim Ptitsyn
Collider-Accelerator Department
BNL

HERA – first lepton-proton collider

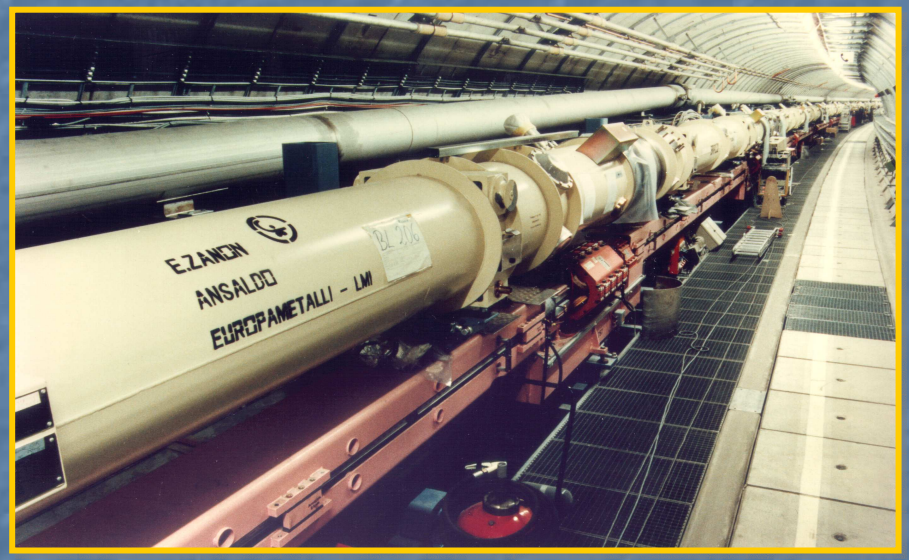

Double ring collider (6.3 km)

Completing its operation this year

920 GeV (p) X 27.5 GeV (e^-, e^+)

320 GeV center0f-mass energy

Longitudinal lepton polarization

Superconducting proton ring

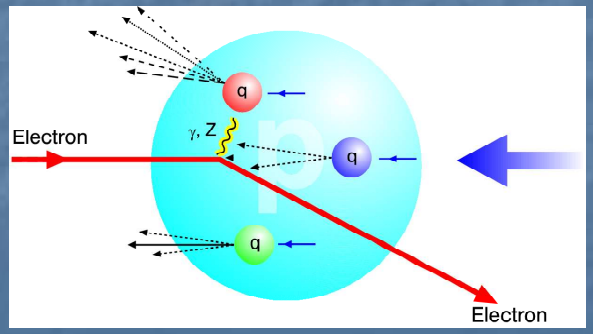

BROOKHAVEN NATIONAL LABORATORY

HERA – first lepton-proton collider

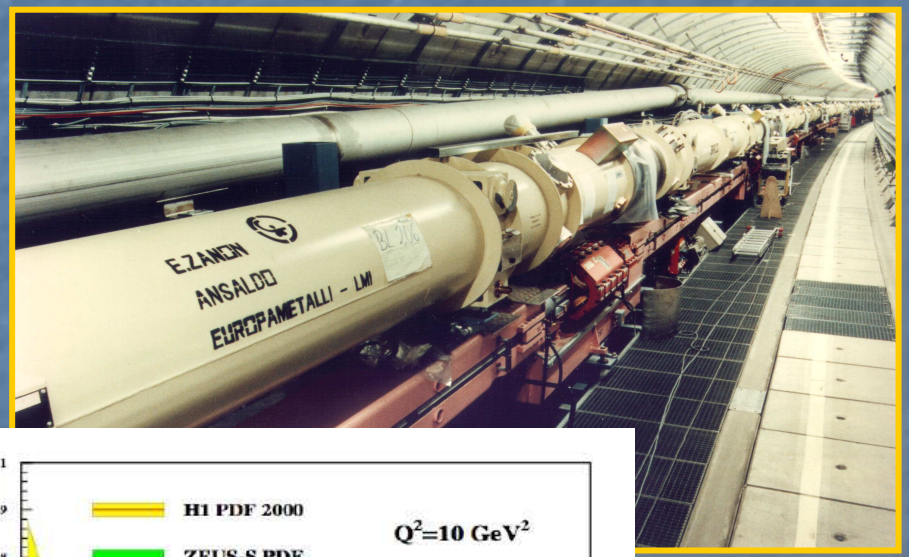

Double ring collider (6.3 km)

Completing its operation this year

920 GeV (p) X 27.5 GeV (e^-, e^+)

320 GeV center0f-mass energy

Longitudinal lepton polarization

Superconducting proton ring

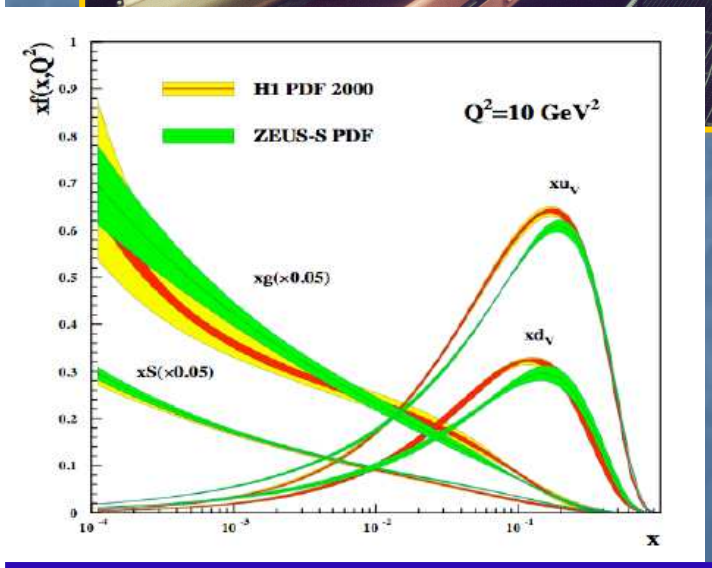

Selection of physics results:

- **precise data on details of the proton structure**
- **the discovery of very high density of sea quarks and gluons present in the proton at low-x**
- **detailed data on electro-weak electron-quark interactions**
- **precision tests of QCD (α_s measurements)**

BROOKHAVEN NATIONAL LABORATORY

Physics scope of lepton-ion colliders after HERA

Different Center-of-Mass Energy -> Different kinematic regions

Higher Luminosity -> Precision data

Polarized beams -> Spin structure of nucleons (still a puzzle!)

Ions up to large A -> Color Glass Condensate (state of extreme gluon densities)

QCD dynamics in much greater details

Also, search for new physics: leptoquarks … (high CME)

BROOKHAVEN NATIONAL LABORATORY

Future collider designs

Ring-ring

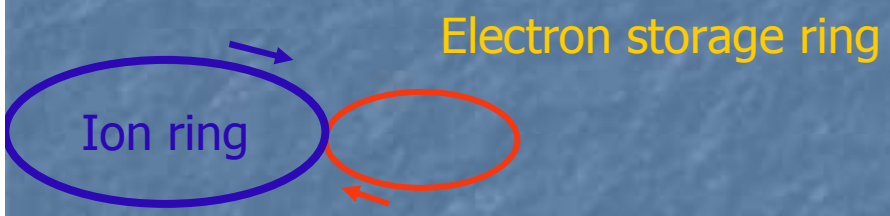

	CME	On the base of
eRHIC ring-ring	30-100 GeV	RHIC (BNL)
ELIC	20-90 GeV	CEBAF (JLab)
LHeC	1.4 TeV	LHC (CERN)

Linac-ring

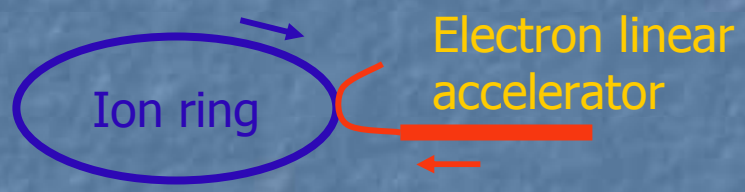

	CME	On the base of
eRHIC ERL-based	25-100 GeV	RHIC (BNL)

Parameter table

	HERA		eRHIC ring-ring		eRHIC ERL-based		ELIC		LHeC	
	p	e	p	e	p	e	p	e	p	e
Energy, GeV	920	27.5	250	10	250	10	225	9	7000	70
Bunch frequency, MHz	10.4		14.1		14.1		1500		40	
Bunch intensity, 10^{11}	0.72	0.29	1	2.3	2	1.2	0.04	0.075	1.7	0.14
Beam current, A	0.1	0.04	0.21	0.48	0.42	0.26	1	1.8	0.54	0.07
Rms emittance,x/y, nm	5.1/5.1	20/3.4	9.5/9.5	53/9.5	3.8	1.0	5.1/0.2	5.1/0.2	0.5/0.5	7.6/3.8
β^*, x/y, cm	245/18	63/26	108/27	19/27	26	100	0.5/0.5	0.5/0.5	180/50	13/7
Beam size at IP, x/y, μm	112/30		100/50		32/32		5/1		31/16	
Max beam-beam parameter per IP	0.0012	0.037	0.015	0.08	0.015	2.3	0.0064	0.086	0.0008	0.05
Bunch length, cm	19	1	20	1.2	20	1	0.5	0.5	7.6	0.7
Polarization, %	0	45	70	80	70	>80	>70	80	0	0
Peak Luminosity, 10^{33} $cm^{-2}s^{-1}$	0.04		0.47		2.6		75		1.1	

BROOKHAVEN NATIONAL LABORATORY

IR design

HERA IR

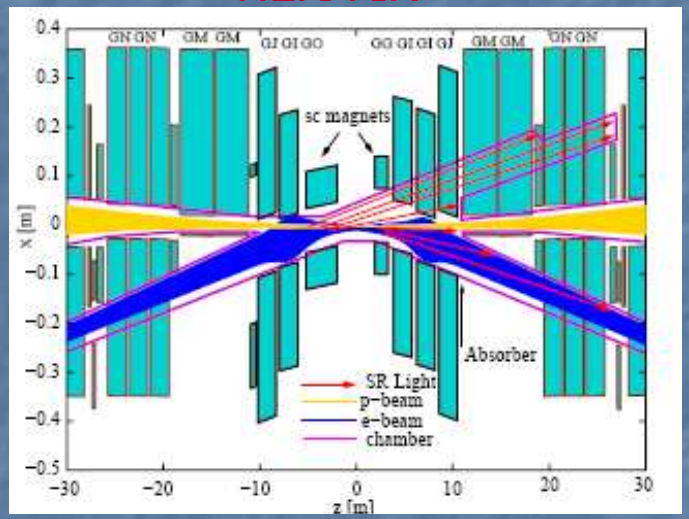

Taking into account HERA (and B-factories) experience to resolve IR design issues:

- Strong beam focusing
- Fast separation *(avoiding parasitic beam-beam)*
- Managing synchrotron radiation fan *(absorbers, collimators, masks locations; precise orbit control)*
- IR Vacuum *(beam conditioning, adequate pumping, avoiding HOM heating)*
- Detector integration

Special IR magnet designs



HERA type half quadrupole used in eRHIC and LHeC designs

Lambertson quadrupole is a part of ELIC IR

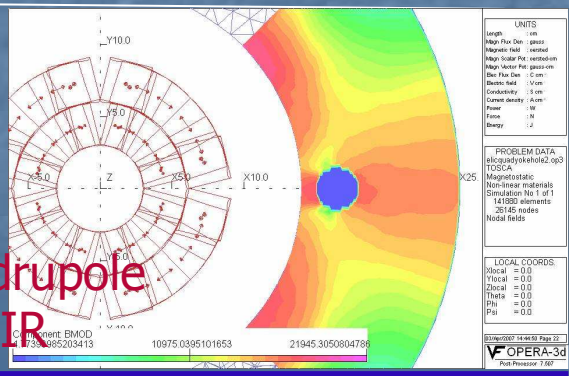

BROOKHAVEN NATIONAL LABORATORY

IR design features

	Distance to nearest magnet from IP	Beam separation	y/x beam size ratio
eRHIC ERL-based	3 m	Detector integrated dipole	1
eRHIC ring-ring	1 m	Combined field quadrupoles	0.5
ELIC	3 m	Cross. Angle 30 mrad	0.2
LHeC	1.2 m	Cross. Angle 2 mrad	0.5

ELIC and LHeC:
Crossing Angle + Crab Crossing ⟹ 20-25 MV transverse voltage (for protons)

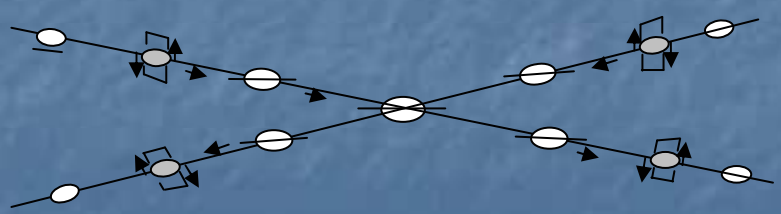

R&D for crab cavities:

- Cavity design for high current operation
- Phase and amplitude stability tolerances
- Evaluation of beam dynamics effects

KEKB Crab Cavity Commissioning this year

BROOKHAVEN NATIONAL LABORATORY

Beam-beam interactions

eRHIC and ELIC designs aim at considerably higher beam-beam parameters than achieved at HERA (ξ_p = 0.0012, ξ_e = 0.04).

ξ_p = 0.012 achieved in RHIC polarized proton operation
ξ_e > 0.08 in e+e- factories

ELIC e-ring:
- **large synchrotron tune -> eliminating nonlinear synchro-betatron resonances**
- **equidistant betatron phase advance between IPs**

eRHIC ring-ring: 2-D strong-strong simulation confirmed feasibility of design parameters *(J. Shi et al.)*

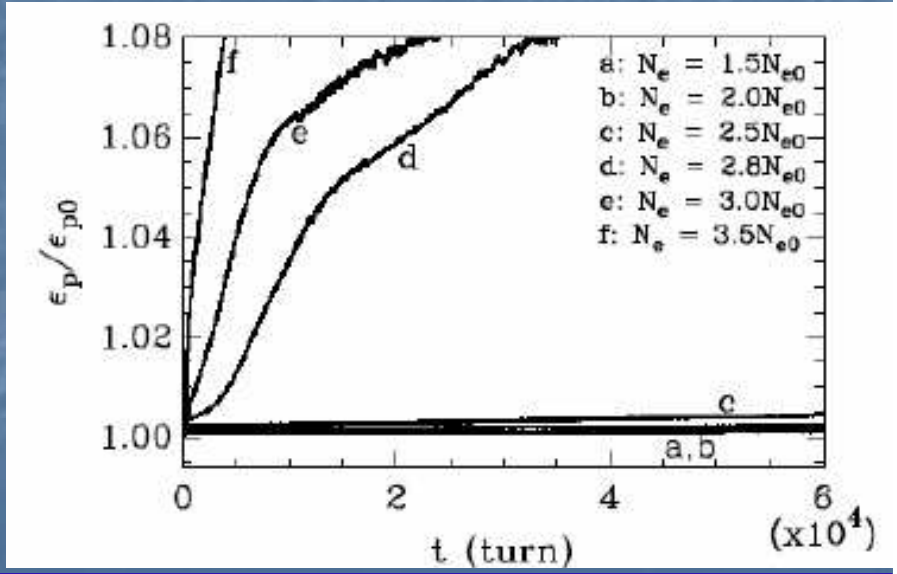

Beam-beam interactions

eRHIC and ELIC designs aim at considerably higher beam-beam parameters than achieved at HERA (ξ_p = 0.0012, ξ_e = 0.04).

ξ_p = 0.012 achieved in RHIC polarized proton operation
ξ_e > 0.08 in e+e- factories

ELIC e-ring:
- **large synchrotron tune -> eliminating nonlinear synchro-betatron resonances**
- **equidistant betatron phase advance between IPs**

eRHIC ring-ring: 2-D strong-strong simulation confirmed feasibility of design parameters *(J. Shi et al.)*

eRHIC ERL-based: e-beam disruption, kink instability, e-beam parameter fluctuations have been studied *(Y. Hao et al, this conference)*

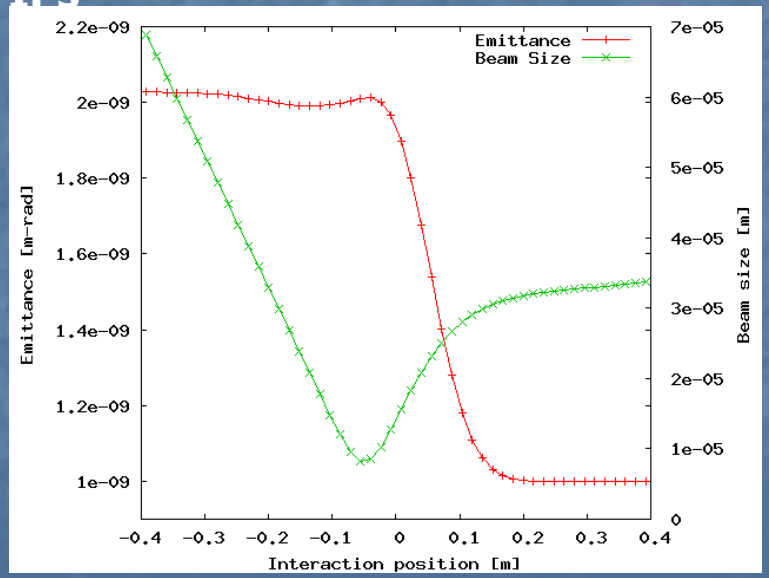

Further beam-beam simulations are planned.

BROOKHAVEN NATIONAL LABORATORY

Specific design issues

- Matching beam cross sections at the IP for different collision energies.

eRHIC ERL-based: variable β^*
eRHIC ring-ring : variable electron emittance + variable β^*
ELIC: variable ion normalized transverse emittance (e-cooling)

- Matching bunch frequencies for various ion energies.

Ion revolution frequency varies with the energy.

eRHIC ERL-based: within tuning range of linac RF cavities ($\Delta f/f < 10^{-3}$)
eRHIC ring-ring: e-ring circumference lengthening (by 20cm) by mechanically moving arcs ("trombone")
ELIC: "clocking" -> variation of ion RF harmonic number; ~1.2cm maximum orbit offset in the arcs.

BROOKHAVEN NATIONAL LABORATORY

eRHIC, ion beam

RHIC -> 7 years of operation involving polarized protons, d, Cu and Au ions

Only polarized proton collider in the world. 100 GeV operation so far. 250 GeV operation planned in near future.

eRHIC, ion beam

RHIC -> 7 years of operation involving polarized protons, d, Cu and Au ions

Only polarized proton collider in the world. 100 GeV operation so far. 250 GeV operation planned in near future.

For eRHIC:

- Increase of number of bunches: 111 -> 166 -> (332?) (Injector system; e-cloud)
- Polarized ^{3}He production (EBIS) and acceleration.
- Possibility of parallel operation with ion-ion and lepton-ion collisions

eRHIC luminosity will benefit from ion beam cooling techniques:

- Longitudinal stochastic -> used in the heavy ion operation this year
- RHIC-II electron cooling facility under design

eRHIC ZDR (2004); "eRHIC Accelerator Design Position Paper" for LRP (2007)
BNL and MIT-Bates collaboration

eRHIC ERL-based design

3-10 GeV polarized electrons (with possible upgrade to 20 GeV)

~300m long energy recovery linac

Recirculation passes in the RHIC tunnel

Advantages:

- Much higher electron beam-beam limit
- Multiple working points
- Polarization transparency (at all energies)
- No spin rotator needed
- IR design (small emittance, round beam)
- Full advantage of cooling techniques

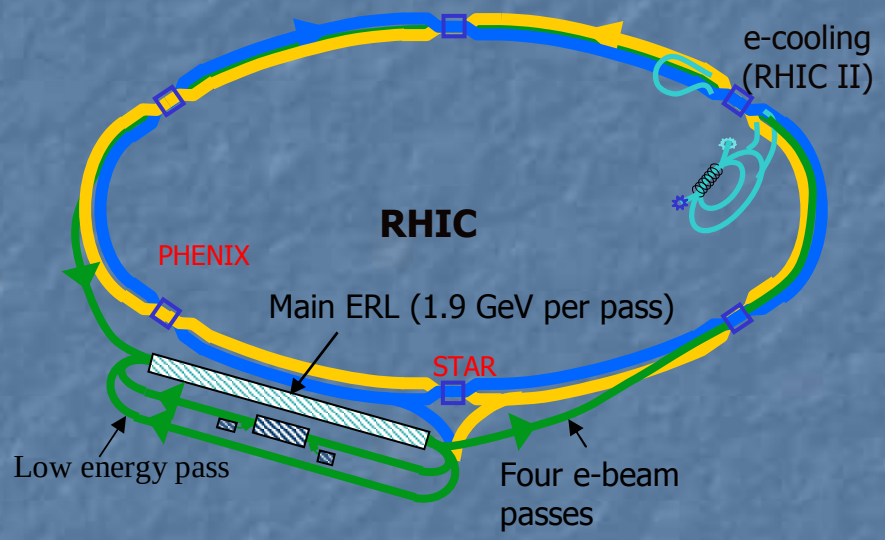

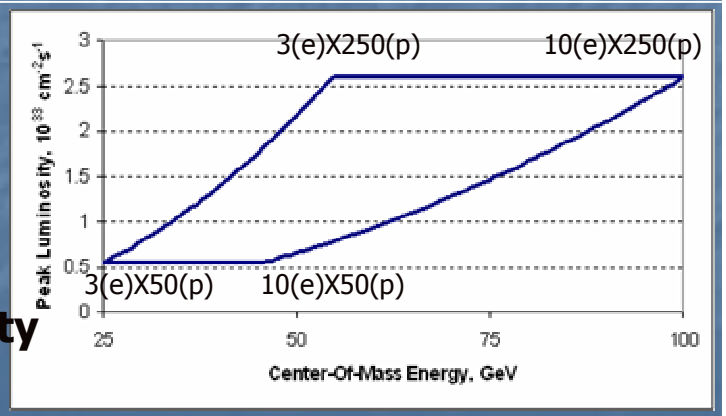

Peak Luminosity vs CME

BROOKHAVEN NATIONAL LABORATORY

ERL-based eRHIC R&D

➢Energy recovery technology for high energy (10 GeV) and high current (0.25A) beams.

Acceleration structure is based on 704 MHz 5-cell SRF cavity, designed for RHIC electron cooling.

Energy recovery, beam loss tolerances, cavity protection system, beam recirculation issues.

ERL test facility at BNL under construction.

➢High intensity polarized electron source

Development of large cathode guns with existing current densities ~ 50 mA/cm^2 and acceptable cathode lifetime. (MIT-Bates)

Positron design options:

- **compact self-polarized ring**
- **ILC type positron production**
- **recirculating pass as storage ring**

Design of recirculation passes:

➢Small aperture magnets (V.Litvinenko)

➢FFAG type pass (D.Trbojevic, this confer.)

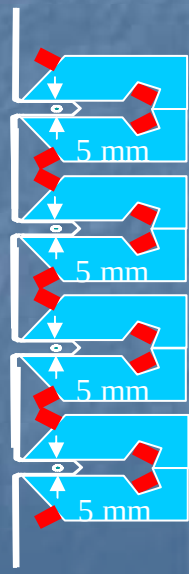

BROOKHAVEN NATIONAL LABORATORY

eRHIC ring-ring

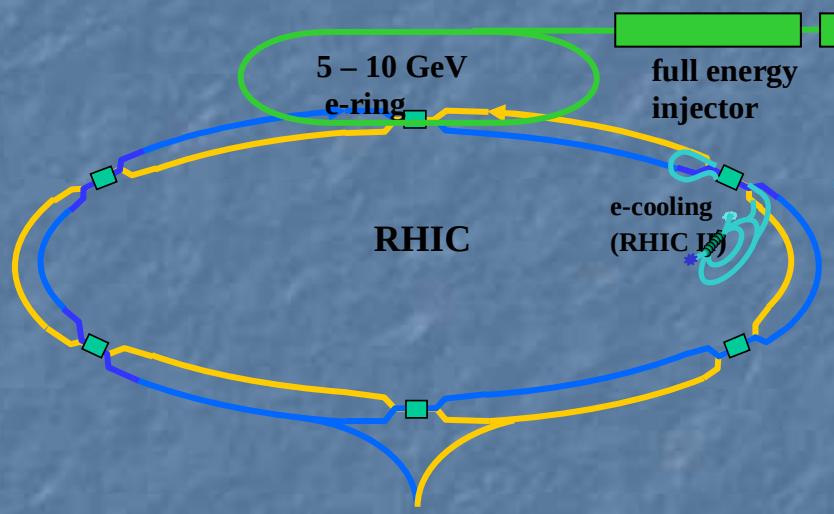

5-10 GeV polarized electrons (positrons)

Peak L = 4.7 10^{32} cm^{-2} s^{-1} (10(e) X 250(p) Gev)

Peak L = 0.8 10^{32} cm^{-2} s^{-1} (5(e) X 50(e) GeV)

- **10 GeV, 0.5 A e-ring with 1/3 of RHIC circumference (1278m)**
- **Injector variants: recirculating linac (warm or cold), figure-8 booster.**
- **Polarized e^- (from the source) and e^+ (self-polarized, 20min at 10 GeV)**
- **Polarization is not available at all lepton energies because of spin resonances**
- y_{co} rms < 150 μm : **closed orbit (and misalignment) tolerances for 80% polarization level**

eRHIC ring-ring features

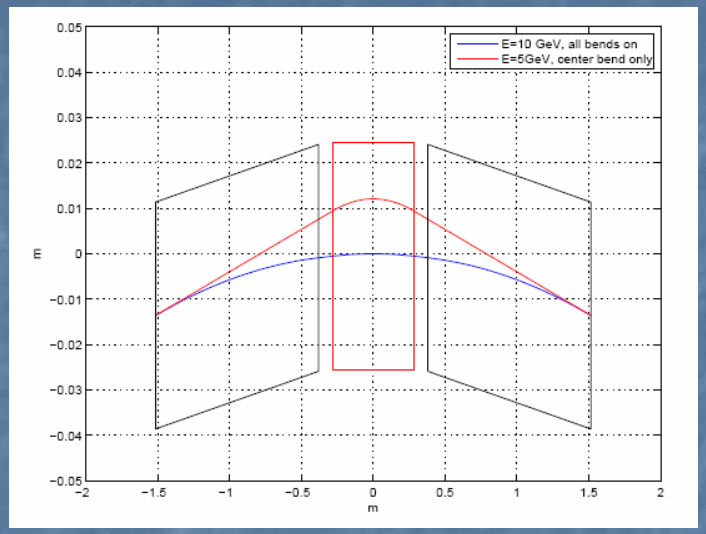

e-ring lattice based on superbends (triplet dipole):

- Improves luminosity at lower electron energies.
- Polarized positrons down to 5 GeV (self-polarization time ~5min)

Electron emittance variation:

~60 nm for 10(e)x250(p) GeV -- ~160 nm for 5(e)x50(p) GeV.
Realized by superbend field variation and FODO cell phase adjustments.

Engineering developments:

- High-heat load vaccum chamber. (Linear radiation power exceeds 15 kW/m)
- Electron ring circumference adjustments
- Design of superbend magnets

BROOKHAVEN NATIONAL LABORATORY

ELIC

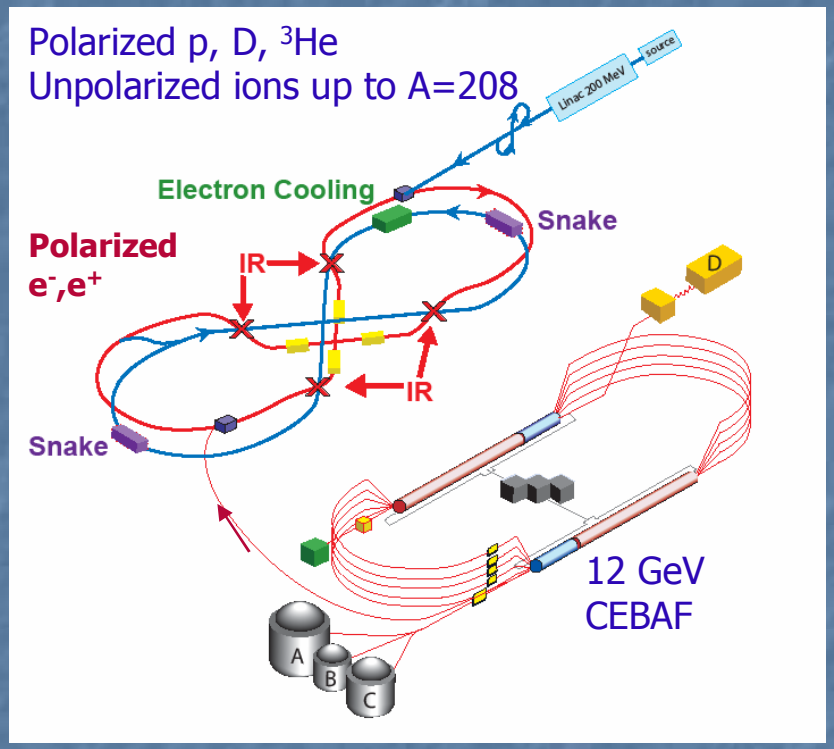

ELIC ZDR (Draft) and
Y. Zhang's talk

E_p = 30-225 GeV; E_{ions} = 15-100 GeV/n

E_e = 3-9 GeV

Peak L ~ 7.5 10^{34} cm^{-2} s^{-1} (9 (e) X 225 (p) GeV)

Peak L ~ 8. 10^{33} cm^{-2} s^{-1} (3 (e) X 30 (p) GeV)

- **"Figure-8" design of ion and lepton storage rings: polarization preservation at ll energies.**
- **Snakes, solenoids and control vertical orbit distortions for the manipulation of spin orientation at IPs.**
- **Very high luminosity approach: moderate bunch intensity, short ion bunches, strong focusing and high bunch repetition rate.**
- **Four interaction regions**
- **The operation compatible with 12 GeV CEBAF operation for fixed target program.**

BROOKHAVEN NATIONAL LABORATORY

ELIC R&D items

- High energy electron cooling (for efficient longitudinal and transverse cooling of protons up to 225 GeV)
- Detector data acquisition and triggering for high bunch rate (1.5 GHz)
- Crab Crossing
- Stability of intense ion beams

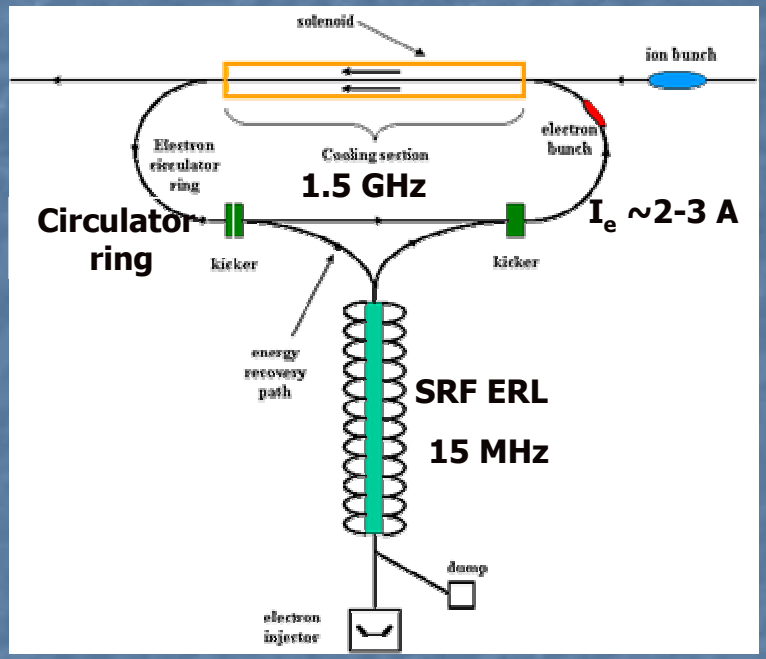

e-cooling design based on circulator ring

BROOKHAVEN NATIONAL LABORATORY

LHeC

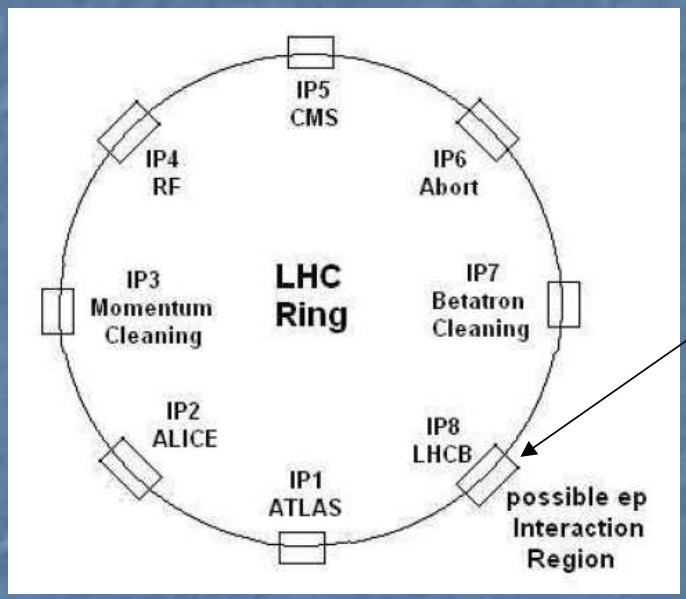

- 70 Gev (e) X 7 TeV (p) -> 1.4 TeV CME
- Peak L = 1.1 10^{33} cm^{-2} s^{-1}
- e-ion collisions at IP8 (after completion of LHCB experiment)
- Proton (ion) beam parameters -> same as for LHC
- Lepton (e-, e+) ring above existing LHC rings
- Injection system identical to LEP
- No major technological developments needed

Luminosity limitation:
large RF Power to replenish synchrotron radiation loss
50MW -> 70 mA maximum lepton current

Conceptual design presented in DESY 06-006, Cockroft 06-05 report by J.B. Dainton, F. Willeke, et al.

Summary

- Several designs of the lepton-ion colliders are under development, including eRHIC at BNL, ELIC at JLab and LHeC at CERN.

- The collider designers are using the experience obtained during years of HERA operation.

- In the same time new ideas and technologies are applied in the accelerator design which should allow to achieve considerably higher luminosities.

- At the end the cost and the importance of the physics that can be explored at a particular collider will be important factors for a success of one or another design.

Acknowledgements to: I. Ben-Zvi, J.B. Dainton, A. Fedotov, J. Keil, Y. Hao, V.N. Litvinenko, L. Merminga, C. Montag, T. Roser, D. Trbojevic, Y. Zhang.