

**COMPARISON OF THE ELECTRON AND POSITRON
ANOMALOUS MAGNETIC MOMENTS:
EXPERIMENT 1987**

I.B. VASSERMAN, P.V. VOROBYOV, E.S. GLUSKIN, P.M. IVANOV, I.A. KOOP,
G.Ya. KEZERASHVILI, A.P. LYSENKO, I.N. NESTERENKO, E.A. PEREVEDENTSEV,
A.A. MIKHAILICHENKO, A.A. POLUNIN, S.I. SEREDNYAKOV,
A.N. SKRINSKY and Yu.M. SHATUNOV

Institute of Nuclear Physics, 630090 Novosibirsk, USSR

Received 25 August 1987

The anomalous magnetic moments of relativistic electrons and positrons have been compared by measuring the spin precession phase difference at a given time interval. The difference in the anomalous magnetic moments between the electron and the positron has been shown to lie within 1×10^{-8} at 95% confidence level, which improves the accuracy of the previous measurements by an order of magnitude.

Introduction. The spin dynamics properties have been used for a long time to determine the magnetic moments of atoms and elementary particles by measuring the rotation angle or the frequency of the spin precession in the magnetic field. To date the accuracy record of $\sim 3 \times 10^{-9}$ is held by the measurement of the ratio of the electron anomalous magnetic moment μ' to the normal one μ_0 which has been performed for a single electron in the magnetic trap [1].

The anomalous magnetic moments (AMM) of a particle and its anti-particle are relevant to the verification of the CPT-theorem, which predicts their identity in absolute value. Comparisons of AMM for electrons and positrons, with 10^{-7} accuracy, were performed in two experiments: for non-relativistic particles the magnetic trap was used where $(g-2)$ factors were measured independently for the electron and the positron [2], and in our previous experiment at VEPP-2M, where the AMM difference for the ultra-relativistic electrons and positrons was measured in the electron-positron storage ring [3]. An electron-positron storage ring where both particles and anti-particles rotate in the same magnetic fields (and so do their spins) gives the most adequate solution to the problem of comparison of the anomalous magnetic moments of these particles.

The spin precession frequency for an ultra-relativistic particle circulating in the storage ring with the transverse magnetic field of H_z can be presented in the form:

$$\Omega = \omega_s + 2\mu' \langle H_z \rangle = \omega_s (1 + \gamma\mu'/\mu_0), \quad (1)$$

where $\omega_s = e\langle H_z \rangle / \gamma mc$ is the revolution frequency as specified by the accelerating RF source.

In the previous experiments at the storage ring VEPP-2M [3,4] the electron and positron AMM comparison was performed by the simultaneous measurement of the spin precession frequencies Ω^- , Ω^+ of electrons and positrons using the resonant depolarization technique [5]. The AMM comparison error of this technique in an ideal case can be much less than the spin frequency spread. Practically the accuracy is limited by the stability of the accelerating RF frequency and by the uncontrollable drift of the magnetic field value in the storage ring.

The essence of the technique. Free of the above limitations is another technique where the difference in the spin precession angles between electrons and positrons

$$\Delta\varphi = \int_0^{\Delta t} (\Omega^+ - \Omega^-) dt$$

is measured during the time Δt , which is limited by the depolarization time. The best sensitivity in this technique is obtained when the polarization is directed perpendicularly to H_z . The radiative polarization aligns the magnetic moments of electrons and positrons circulating in the storage ring parallel to the magnetic field. The coherent spin rotation to the horizontal plane can be done by applying a radio-frequency field $\vec{H} \perp H_z$ with the frequency f sweeping at the rate of \dot{f} across the resonant frequency $f_r = \Omega/2\pi$. If the adiabaticity condition [6] is satisfied: $w^2 \gg 2\pi\dot{f}$, where

$$w = 2\mu' \langle \vec{H} \rangle / \gamma \approx (\langle \vec{H} \rangle / \langle H_z \rangle) \omega_s,$$

then the variation of the tune offset $\Delta f = f - f_r$ between the initial value of $\Delta f_0 \gg w/2\pi$ and zero results in 90° rotation of the polarization direction while the degree of polarization degrades insignificantly. After that the radio-frequency field is switched off^{#1}.

Then the spin precession proceeds in the horizontal plane as can be seen from the harmonic oscillation of the longitudinal polarization actually observed for example in the experiment on muonic ($g-2$) measurements [8]. In our case the longitudinal polarization can be detected in the elastic scattering on the polarized atomic hydrogen jet target simultaneously for electrons and positrons.

As we are only concerned with the difference in the phase advance $\Delta\varphi$, it can be measured without turn-by-turn observation of the polarization direction. If the radio-frequency field is repeatedly switched on within the time interval Δt while its frequency sweeps oppositely from f_r to f_0 , then the transverse polarization of the beams will be restored, which is stable with respect to depolarizing effects. However its degree and sign will be arbitrary because the phases of the spins with respect to the field direction \vec{H} are random at the moment when the field switches on for the second time. The information on

the difference in the phase advance over this time interval can be obtained from the comparison of the restored polarization degrees for the electrons and the positrons.

The restored transverse polarization degree averaged over the beam distribution S_1 is related to the initial one S_0 by the equation:

$$S_1 = S_0 \{ \cos^2 \theta + \sin^2 \theta \cos \bar{\varphi} \exp[-\frac{1}{2}(\delta\varphi)^2] \}, \quad (2)$$

where θ is the spin direction angle with respect to the vertical, $\delta\varphi$ is the rms spread in the precession angles around the average angle $\bar{\varphi}$ at the moment Δt of the second switch on of \vec{H} .

The spin frequencies spread. The angular spread $\delta\varphi$ is due to the spread of the spin frequencies averaged over the particle's motion which results in the beam depolarization thus limiting the free precession time Δt . As shown in ref. [9], the spin frequencies spread $\delta\Omega$ is determined by the nonlinear perturbations of the particle motion in the storage ring, it can be much less than the radiation damping rate $\lambda \approx 10^{-5}\omega_s$. In this case for the time Δt the diffusion due to the quantum fluctuations of the synchrotron radiation will mix up the particles' oscillations amplitudes and phases, therefore the spin precession frequencies will be mixed within the steady state spread $\delta\Omega$. Taking into account the diffusion, the depolarization time τ_d will be much longer than $(\delta\Omega)^{-1}$, it can be estimated from the relation:

$$\tau_d \approx \lambda / (\delta\Omega)^2. \quad (3)$$

The presence of the spin frequencies spread resulting in the depolarization sets the basic limitations on the accuracy of the technique in question, which is why much attention has been paid to studying this problem. Experimental study of the depolarization rate was performed at various settings of the storage ring sextupole corrections that compensate for the reduction in the average energy of the oscillating particle with respect to the synchronous particle. The depolarization has been shown to be minimal when the sextupole setting gives zero chromaticity in the radial betatron oscillations. The measurements presented below give, for this setting of the storage ring VEPP-2M optics, the spin frequencies spread within $\delta\Omega \approx 2 \times 10^{-7}\omega_s$, which allows $\Omega\Delta t/2\pi \approx 10^7$ spin revolutions over the free preces-

^{#1} The possibility of the adiabatic spin flip of electrons and positrons in the storage ring by means of the radio-frequency field was studied in ref. [7]. An RF device for coherent spin rotation was named "flipper".

sion time while the beam polarization degree degrades within acceptable limits.

Polarization degree measurements. Similarly to the previous experiments at VEPP-2M the beam polarization degree was detected by the intra-beam elastic scattering of the particles [10]. The scintillation counters system for detection of the particles, lost due to this process, gives the counting rate $\dot{N} = 40 I^2 (1 - 0.15 S^2) \text{ s}^{-1}$, where I is the beam current in milliamperes. The maximum contribution of the polarization at $S=1$ comes to 10%. The accelerating voltage phase-lock enables the simultaneous detection of the counter-rotating electrons and positrons in the same system.

In the routine experimental conditions at the energy of $E=650$ MeV the currents of the electrons and positrons after the radiative polarization were $I^- \approx I^+ = 5$ mA which gives the counting rate of $\dot{N} = 10^3 \text{ s}^{-1}$. The counting rate dependence on S squared reduces the polarimeter sensitivity to low polarization degrees of $S \lesssim 0.2$. To determine the sign of S_1 after the RF-field action the natural radiative polarization process can be used, which changes the polarization degree according to the equation:

$$S = S_m + (S_1 - S_m) \exp(-t/\tau_p), \quad (4)$$

where $S_m = 0.92$ is the maximum possible degree, τ_p is the characteristic polarization time (on VEPP-2M $\tau_p = 3200$ s at the energy of 650 MeV).

In fig. 1 the time dependence of the counting rate (normalized on the beam current squared) of the elastic scattering events in a typical experimental run is presented. The measurements begin at the time $t = 3\tau_p$ after the injection, when the polarization de-

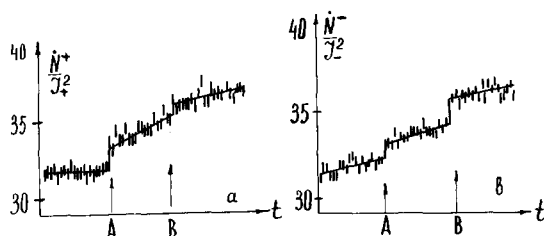


Fig. 1. Time dependence of the elastic scattering event rate, normalized on the beam current squared, for the typical run when the restored polarization of the positron (a) and the electron (b) beam differed in sign ($S_1^+ / S_0 = -0.8$, $S_1^- / S_0 = 0.8$).

gree builds up to $S_0 \cong 0.85$. At the point A the RF flipper device #2 is switched on twice for short periods of time to rotate the spins to the horizontal plane then back upright. 10 min past, from point B onwards the depolarization is performed by another RF device named depolarizer ($\tau_d = 10$ s). Relating the leaps at the points A and B one can determine both the absolute value of S_1 / S_0 and the sign of S_1 which is evident from the comparison of fig. 1a where $S_1 / S_0 = -0.8$ and fig. 1b where $S_1 / S_0 = 0.8$.

Experimental results. In each measurement run the RF field was switched on with the initial tune $\Delta f_0 = 15$ kHz from the resonance in order to approach it at 50 kHz/s rate. The switching off and subsequent switching on in 0.1 s was made in the vicinity of the true resonance frequency $f_z = (\Omega - 2\omega_s) / 2\pi$ with an error ϵ that is not known a priori. This error is due to the particles' average energy stability in the storage ring. The stabilization system that governed the guide field level according to the on-line data of the remote electro-mechanical measurements of the storage ring dipoles and quadrupoles horizontal alignment [11], maintained the long-term energy stability of $\Delta E / E = \pm 1.5 \times 10^{-5}$.

The energy calibration by means of the resonant depolarization technique was made in each experimental run about 1–1.5 h after the measurement run. Only the runs with $|\epsilon| \lesssim 400$ Hz were selected which corresponds to spin deflection angle of $70^\circ < \theta < 110^\circ$ from the vertical ($\text{tg } \theta = w / \epsilon$).

The results for the electron and positron polarization degrees measured in the runs thus selected are shown in fig. 2. The experimental points are fitted by the least squares with a parametrically specified ellipse:

$$S_1^+ / S_0 = S \cos \varphi, \quad S_1^- / S_0 = S(\cos \varphi + \Delta\varphi), \quad (5)$$

where $S = S_0 \exp[-\frac{1}{2}(\delta\varphi)^2]$ is a remnant polarization degree after free precession, $\Delta\varphi$ is the desired

#2 The radio-frequency ($f = (\Omega - 2\omega_s) / 2\pi = 7.93$ MHz) longitudinal (along the velocity) magnetic field of $\vec{H} = 100$ Gs amplitude is generated on the orbit section ($l = 40$ cm) by the inductance coil connected to the resonant circuit powered with some kilowatt transmitter to provide for the resonant harmonic value w up to $w \cong 6 \times 10^{-5} \omega_s \approx 2\pi \times 10^3$ Hz. The control system enables the transmitter tune to scan in 100 kHz band in $10^{-1} - 10^2$ s.

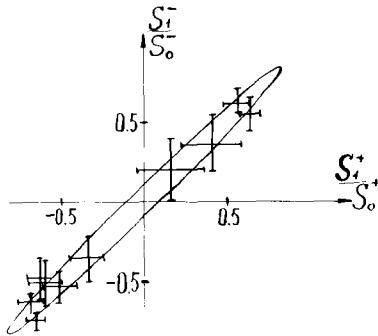


Fig. 2. The restored polarization degrees for electrons and positrons, measured without spin precession frequencies separation by the horizontal electrostatic field.

difference in the precession angles between the electrons and the positrons.

To better determine the value of S the measurement runs were made with the static horizontal electric field ϵ_r imposed on one of the orbit sections to cause the separation of precession frequencies

$$\Delta = \Omega^+ - \Omega^- = 4\mu'c \langle \epsilon_r \rangle$$

$$= 2(\langle \epsilon_r \rangle / \langle H_z \rangle) \omega_s \approx 2.5 \text{ Hz} . \quad (6)$$

The results of these runs, shown in fig. 3, give $S = 0.8 \pm 0.05$. Hence using eq. (3) one can obtain the value of the mean spin frequencies spread.

The same value of the "radius" is used in fitting the ellipse in fig. 4 where the experimental points

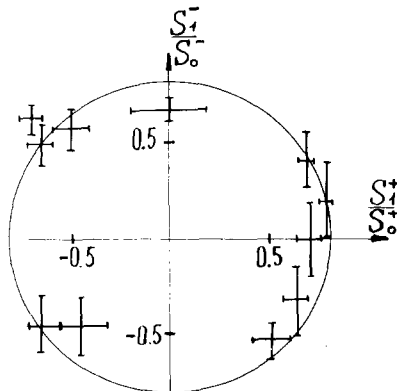


Fig. 3. The restored polarization degrees for electrons and positrons, measured with spin precession frequencies separated by the horizontal electrostatic field at $\Delta = \Omega^+ - \Omega^- = 2.5 \text{ Hz}$.

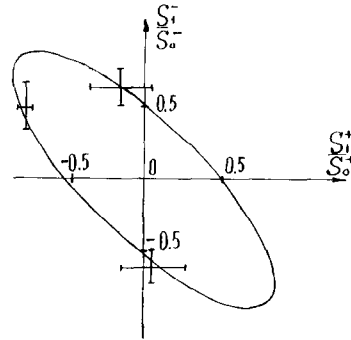


Fig. 4. The spin frequency separation is 2.5 times greater than in fig. 3.

were taken with the electrostatic separation of frequencies 2.5 times greater.

The total measured data processing allows the conclusion that in the absence of the electric field the phase difference

$$\Delta\phi = \int_0^{0.1 \text{ s}} (\Omega^+ - \Omega^-) dt$$

is within 5° which corresponds to $\Delta\mu'/\mu' \lesssim 1 \times 10^{-8}$ at the confidence level of 95%.

The result obtained improves the accuracy of our previous measurement [4] by an order of magnitude. Note the distinction between the technique of the storage ring and that of the magnetic trap. In the magnetic trap the value of $\mu'/\mu_0 \equiv \frac{1}{2}(g-2) = a$ is measured, which is directly calculable in quantum electrodynamics. In our case the values $\mu'H = \gamma a$ are compared for the electron and the positron. The difference in the precession frequencies here can occur not only due to μ' but also due to difference in masses, charges or normal magnetic moments of the same relative magnitude.

The authors express their acknowledgements to the personnel of the storage ring VEPP-2M that maintained the machine to make the experiment possible.

References

[1] R. van Dyck, P.B. Schwinberg and H.G. Dehmelt, Atomic Physics 9 (World Scientific, Singapore, 1986).
 [2] P.B. Schwinberg and R.S. van Dyck, Phys. Rev. Lett. 47 (1981) 1679.

- [3] I.B. Vasserman et al., Phys. Lett. B187 (1987) 172.
- [4] S.I. Serednyakov et al., Phys. Lett. B66 (1977) 102.
- [5] Ya.S. Derbenev et al., Part. Accel. 10 (1980) 177.
- [6] M. Froissart and R. Stora, Nucl. Instrum. Methods 7 (1960) 297.
- [7] A.A. Polunin and Yu.M. Shatunov, INP preprint 82-16 (1982).
- [8] J. Bailey et al., Phys. Lett. B55 (1975) 420.
- [9] A.P. Lysenko, A.A. Polunin and Yu.M. Shatunov, Part. Accel. 18 (1986) 215.
- [10] S.I. Serednyakov et al., JETP 71 (1976) 2025.
- [11] B.A. Baklanov et al., Proc. VII All-union Conf. on Charged particles accelerators, Vol. 1 (1980) 338.