



*Ventilation exhaust duct for High Flux Beam Reactor (HFBR) ambient air, which is continuously sampled before going up the stack.*

## Chapter 8

# Radiological Dose Assessment



## Brookhaven National Laboratory's (BNL's) annual radiological dose assessment assures stakeholders that on-site facilities and BNL operations are in compliance with federal, state, and local regulations, and that the public and the environment are protected.

The potential radiological dose to members of the public is calculated at an off-site location where models indicate that emissions from a site source could result in the maximum dose to an off-site individual, defined as the “maximally exposed off-site individual” (MEOSI). Based on MEOSI dose calculation criteria, members of the public would receive a dose less than the MEOSI. The dose to the MEOSI is the total dose from direct and indirect dose pathways via air immersion, inhalation of particulates and gases, and ingestion of local fish and deer meat. In 2024, the total effective dose (TED) to the MEOSI from Laboratory operations was less than 2.5% of the dose limit of 100 mrem in a year required by Department of Energy (DOE) Order 458.1 and well below all other U.S. Environmental Protection Agency (EPA) and U.S. DOE regulatory dose limits for the public, workers, and the environment.

The dose estimates for 2024 were calculated using dose modeling software promulgated by the EPA. All data in this chapter are reported with uncertainties at the 95% (2-sigma) confidence level. As such, the effective dose equivalent (EDE) from air emissions in 2024 was estimated at 1.67 mrem (16.7  $\mu$ Sv) to the MEOSI. This BNL dose level from the inhalation pathway was 16.7% of the EPA's annual regulatory dose limit of 10 mrem (100  $\mu$ Sv). In addition, the dose from the ingestion pathway was estimated as 0.61 mrem (6.1  $\mu$ Sv) from the consumption of deer meat. The on-site portions of the Peconic River had minimal amounts of water, which did not support a fish population, so no samples were available for surveillance monitoring and there was no measured dose attributable to BNL legacy Cesium-137 (Cs-137) levels in fish in the Peconic River. In summary, the total annual dose to the MEOSI from all pathways was estimated at 2.28 mrem (22.8  $\mu$ Sv), which is less than 2.5% of DOE's 100-mrem limit. The aggregate population dose was 9.8 person-rem among approximately six million people residing within a 50-mile radius of the Laboratory. On average, this is equivalent to a fraction of an airport whole body scan per person. Five years of measurement data are shown in the data tables to present the recent history of measured ambient radiation dose at BNL. In 2024, the ambient dose remained indistinguishable from background.

Dose to the maximally exposed individual (MEI) on-site and outside of controlled areas, calculated from thermoluminescent dosimeter (TLD) monitoring records, was  $4 \pm 2$  mrem above natural background radiation levels, also well below the 100-mrem DOE limit on dose. The average annual external dose from ambient sources on-site was  $64 \pm 8$  mrem ( $640 \pm 80$   $\mu$ Sv), while the dose from off-site ambient sources was  $62 \pm 8$  mrem ( $620 \pm 80$   $\mu$ Sv). Both on- and off-site external dose measurements include the contribution from natural terrestrial and cosmic background radiation. A statistical comparison of the average doses measured using 53 on-site TLDs and 16 off-site TLDs showed that there was no external dose contribution from BNL operations distinguishable from the natural background radiation level. Additional TLDs were used to measure on-site areas known to receive radiation dose slightly above the natural background radiation. Doses to aquatic and terrestrial biota were also found to be well below DOE regulatory limits. In summary, the overall dose impact from all Laboratory activities in 2024 was comparable to that of natural background radiation levels.



## 8.1

# Introduction

This chapter discusses the dose risk consequences from research activities, radiation-generating devices, facilities, and minor bench-top radiation sources at BNL. It is important to understand the radiation exposure levels to the public and workers, as well as to the environment, fauna, and flora. To this end, the Laboratory's routine operations, scientific experiments, and new research projects are evaluated for their radiological dose risk. Dose risks from demolishing decommissioned facilities and decontamination work are also evaluated. All environmental pathway scenarios with potential for dose to humans, aquatic life, plants, and animals are evaluated to estimate the dose risks on-site.

Because all research reactors at BNL have been shut down, defueled, and partly or fully decommissioned for several years, the dose risk from these facilities was trivial in 2024. The Laboratory's current radiological risks are from very small quantities of radionuclides used in science experiments, production of radiopharmaceuticals at the Brookhaven Linear Accelerator (LINAC) Isotope Producer (BLIP), the Radionuclide Research and Production Laboratory (RRPL), and small amounts of air activation produced at the BNL accelerators: Alternating Gradient Synchrotron (AGS), Relativistic Heavy Ion Collider (RHIC), the National Aeronautics and Space Administration (NASA) Space Radiation Lab (NSRL), and the National Synchrotron Light Source II (NSLS-II). These radiological dose evaluations are performed to ensure that dose risks from all Laboratory operations meet regulatory requirements and remain "As Low As Reasonably Achievable" (ALARA) to members of the public, workers, and the environment.

## 8.2

# Direct Radiation Monitoring

A direct radiation monitoring program is used to measure the external dose contribution to the public and workers from radiation sources at BNL. This is achieved by measuring direct penetrating radiation exposures at both on- and off-site locations. The direct measurements taken at the off-site locations are based on the premise that off-site exposures represent true natural background radiation levels, with contributions from cosmic and terrestrial sources, and with no contributions from Laboratory operations.

On- and off-site external dose measurements are averaged separately and then compared using standard statistical methods to assess the contribution, if any, from Laboratory operations.

### 8.2.1 Ambient Radiation Monitoring

To assess the dose impact of direct radiation from BNL operations, TLDs are deployed on-site and in the surrounding communities. On-site TLD locations are determined based on the potential for exposure to gaseous plumes, atmospheric particulates, scattered radiation, and the location of radiation-generating devices. The Laboratory perimeter is also posted with TLDs to assess the dose impact, if any, beyond the site's boundaries (see Photo 8-1). On- and off-site land areas are divided into numbered grids, and each TLD is assigned a unique identification code based on those grids.

**Photo 8-1.** Thermoluminescent dosimeter (TLD) at P-4 Perimeter Station.



In 2024, a total of 63 environmental TLDs were deployed on-site. Fifty-three TLDs, as listed in Table 8-1, were deployed on-site (see Figure 8-1) to measure on-site background. Ten TLDs were placed in areas known to see dose rates higher than background due to the nature of the nearest facility (see Table 8-3).


A total of 16 environmental TLDs, listed in Table 8-2, were deployed at off-site locations (see Photo 8-2) to measure off-site background. In 2024, all 16 wind sectors around the Laboratory (see Fig. 8-2) had at least one TLD location.


An additional 30 TLDs were stored on-site in a lead-shielded container for use as reference and control TLDs for comparison purposes. The annual total of the control TLD dose values for 2024, reported as 075-TLD4 in Tables 8-1 and 8-2, was  $27 \pm 4$  mrem ( $270 \pm 40$  uSv). This dose accounts for any small residual dose not removed from TLDs during the annealing process and the natural background and cosmic radiation sources that are not completely shielded. It is noted that only the TLDs active in 2024 are shown in Figure 8-2. To display historical trends, dose data for TLDs are listed in Table 8-2 until no data has been reported for five consecutive years. For example, three TLDs are listed in Table 8-2 that are not shown on Fig. 8-2, but their data through 2023 is shown in Table 8-2. In addition, TLD 600-TLD3 will disappear from Table 8-2 when two more years pass with No Data.

**Photo 8-2.** TLD in a tree at the Longwood Estate.



**Figure 8-1.** On-site Background TLD Locations.

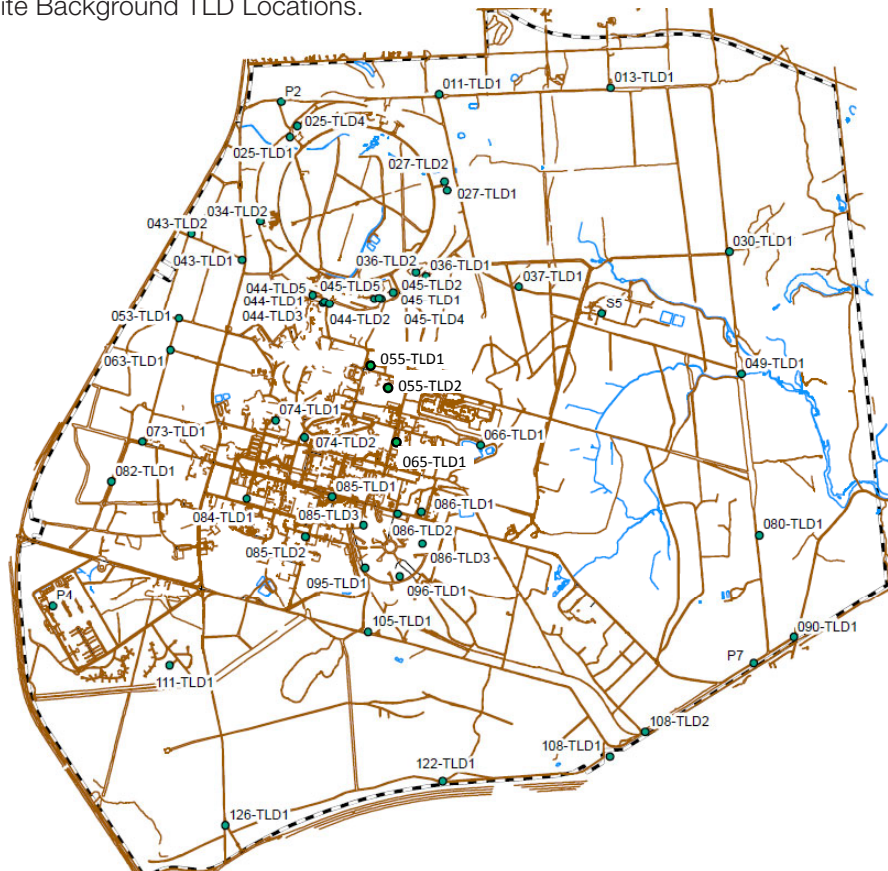

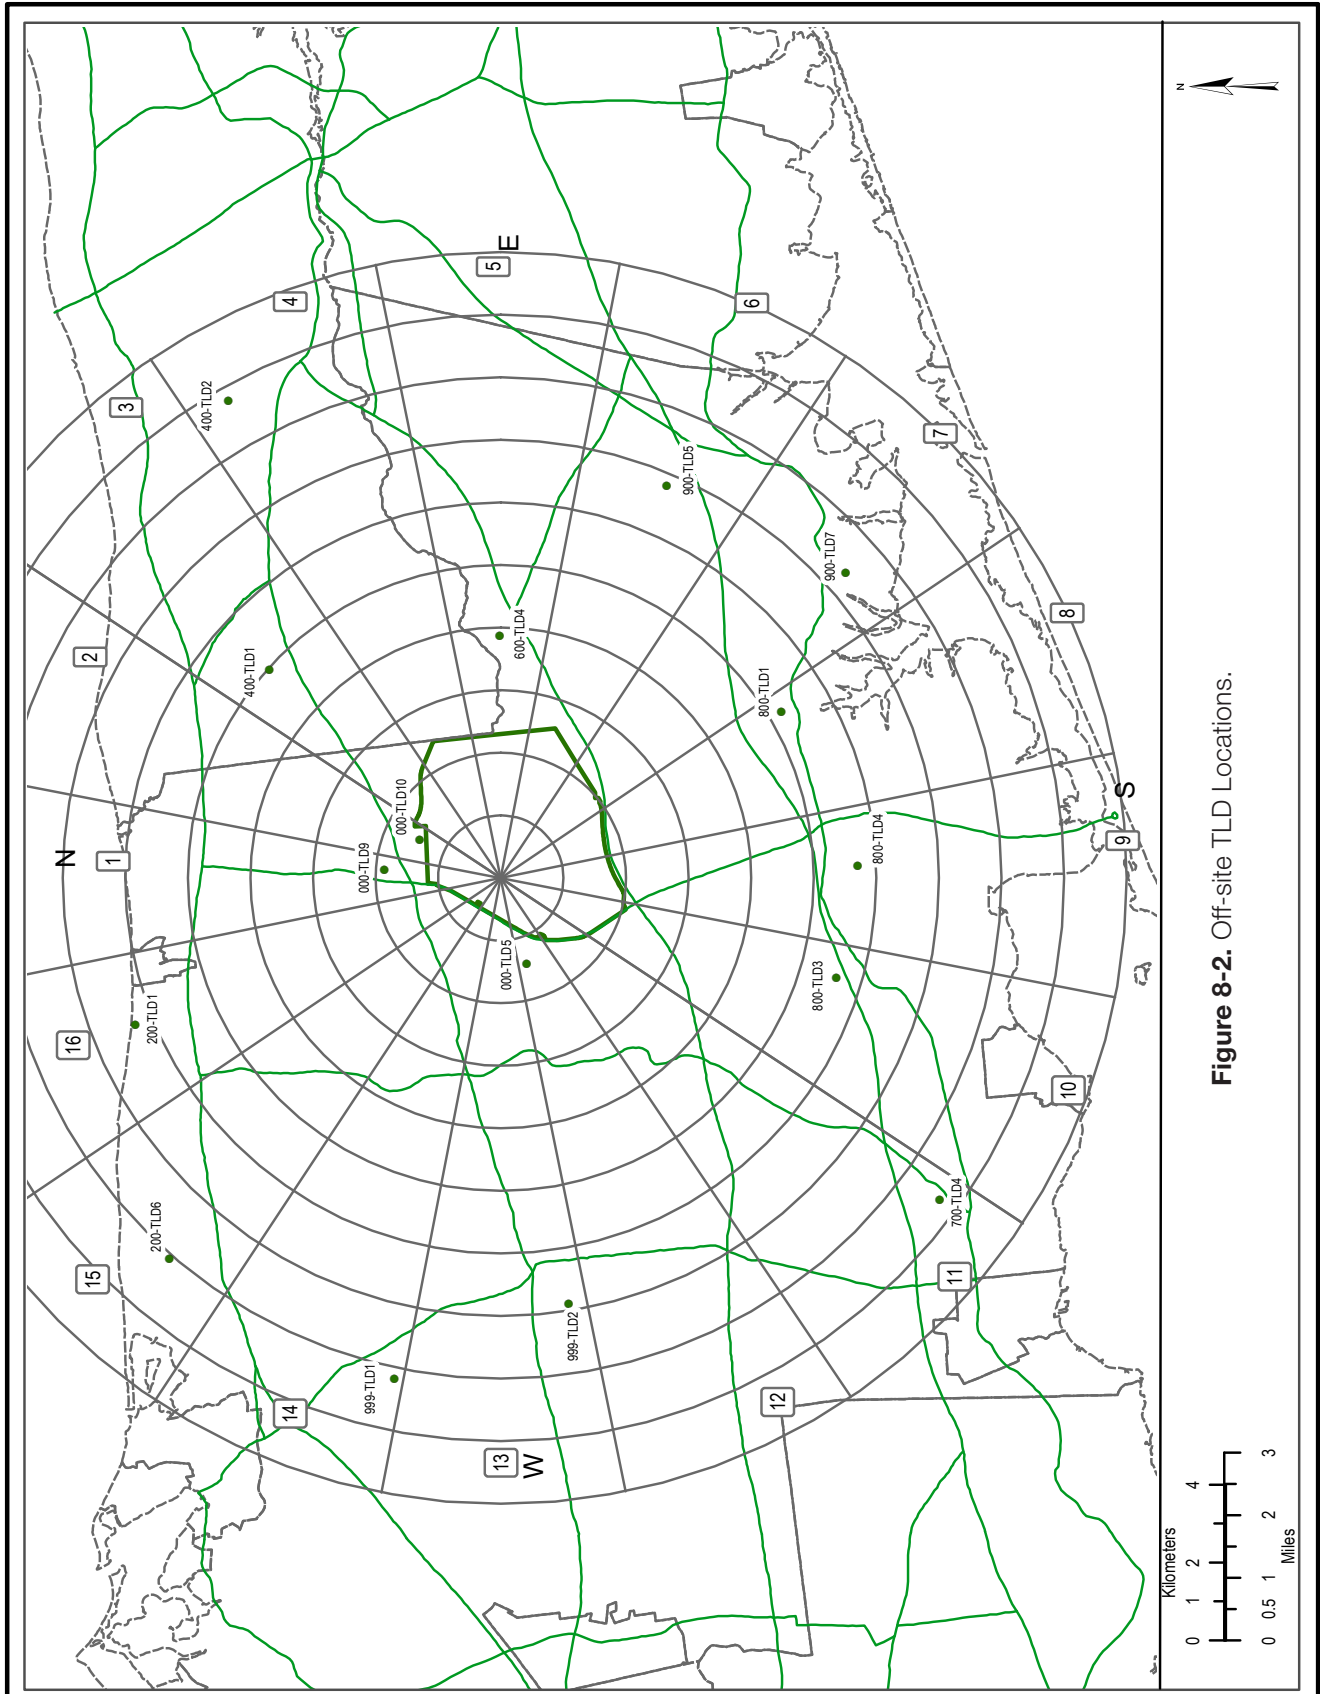

**Figure 8-2.** Off-site TLD Locations.

The on- and off-site TLDs were collected and read quarterly to determine the annual total external radiation dose measured. Table 8-1 shows the annual on-site radiation dose measurements from 2020 to 2024. For 2024, the average on-site external dose from all potential environmental sources, including cosmic and terrestrial radiation sources, was  $64 \pm 8$  mrem ( $640 \pm 80$   $\mu$ Sv). The on-site measurements in this table generally exhibit year-to-year variation within 10% or less of their average. The same can be said about the off-site measured doses in Table 8-2, which shows the annual off-site radiation dose measurements from 2020 to 2024. The average off-site total ambient dose in 2024 from all potential environmental sources, including cosmic and terrestrial radiation sources, was  $62 \pm 8$  mrem ( $620 \pm 80$   $\mu$ Sv).

To determine the BNL contribution to the external direct radiation dose, a statistical test between the measured on- and off-site external doses was conducted. The test showed no significant difference between the off-site dose ( $62 \pm 8$  mrem) and on-site dose ( $64 \pm 8$  mrem) at the 95% confidence level. From the measured TLD doses, it can be safely concluded that there was no measurable external dose contribution to on- or off-site locations from Laboratory operations in 2024.

**Table 8-1.** Five-Year Annual On-Site Direct Ambient Radiation Measurements (2020-2024).

| TLD#     | Location                      | Annual Total Dose, mrem ( $\pm 2\sigma$ , 95% conf. interval) |             |            |             |             |
|----------|-------------------------------|---|-------------|------------|-------------|-------------|
|          |                               | 2020  | 2021        | 2022       | 2023        | 2024        |
| 011-TLD1 | North Firebreak               | 58 $\pm$ 3  | 61 $\pm$ 8  | 52 $\pm$ 4 | 53 $\pm$ 15 | 56 $\pm$ 8  |
| 013-TLD1 | North Firebreak               | 61 $\pm$ 4  | 68 $\pm$ 10 | 59 $\pm$ 7 | 58 $\pm$ 8  | 60 $\pm$ 8  |
| 025-TLD1 | Bldg. 1010, Beam Stop 1       | 63 $\pm$ 19   | 70 $\pm$ 12 | 56 $\pm$ 8 | 57 $\pm$ 9  | 63 $\pm$ 7  |
| 025-TLD4 | Bldg. 1010, Beam Stop 4       | 60 $\pm$ 11   | 64 $\pm$ 11 | 57 $\pm$ 6 | 59 $\pm$ 13 | 60 $\pm$ 7  |
| 027-TLD1 | Bldg. 1002A South             | 57 $\pm$ 9  | 62 $\pm$ 13 | 55 $\pm$ 7 | 54 $\pm$ 9  | 57 $\pm$ 8  |
| 027-TLD2 | Bldg. 1002D East              | 56 $\pm$ 9  | 62 $\pm$ 14 | 53 $\pm$ 3 | 53 $\pm$ 10 | 56 $\pm$ 5  |
| 030-TLD1 | Northeast Firebreak           | 64 $\pm$ 9  | 65 $\pm$ 13 | 61 $\pm$ 6 | 60 $\pm$ 11 | 65 $\pm$ 8  |
| 034-TLD2 | Bldg. 1008, Collimator 4      | 66 $\pm$ 10   | 71 $\pm$ 10 | 59 $\pm$ 9 | 62 $\pm$ 9  | 67 $\pm$ 8  |
| 036-TLD1 | Bldg. 1004B, East             | 56 $\pm$ 12   | 62 $\pm$ 8  | 54 $\pm$ 6 | 58 $\pm$ 6  | 57 $\pm$ 8  |
| 036-TLD2 | Bldg. 1004, East              | 58 $\pm$ 4  | 66 $\pm$ 12 | 56 $\pm$ 6 | 58 $\pm$ 7  | 61 $\pm$ 7  |
| 037-TLD1 | S-13                          | 62 $\pm$ 7  | 67 $\pm$ 12 | 58 $\pm$ 3 | 59 $\pm$ 9  | 60 $\pm$ 5  |
| 043-TLD1 | North Access Road             | 66 $\pm$ 10   | 72 $\pm$ 15 | 66 $\pm$ 4 | 65 $\pm$ 6  | 65 $\pm$ 4  |
| 043-TLD2 | North of Meteorology Tower    | 67 $\pm$ 6  | 71 $\pm$ 12 | 63 $\pm$ 3 | 66 $\pm$ 2  | 67 $\pm$ 11 |
| 044-TLD1 | Bldg. 1006                    | 61 $\pm$ 8  | 67 $\pm$ 10 | 61 $\pm$ 4 | 62 $\pm$ 13 | 64 $\pm$ 7  |
| 044-TLD2 | South of Bldg. 1000E          | 62 $\pm$ 9  | 70 $\pm$ 10 | 62 $\pm$ 6 | 63 $\pm$ 7  | 69 $\pm$ 11 |
| 044-TLD3 | South of Bldg. 1000P          | 59 $\pm$ 8  | 64 $\pm$ 10 | 59 $\pm$ 4 | 62 $\pm$ 10 | 62 $\pm$ 10 |
| 044-TLD5 | North of Bldg. 1000P          | 63 $\pm$ 7  | 66 $\pm$ 19 | 62 $\pm$ 8 | 62 $\pm$ 13 | 66 $\pm$ 6  |
| 045-TLD1 | Bldg. 1005S                   | 61 $\pm$ 10   | 69 $\pm$ 10 | 57 $\pm$ 3 | 59 $\pm$ 8  | 62 $\pm$ 9  |
| 045-TLD2 | East of Bldg. 1005S           | 63 $\pm$ 16   | 67 $\pm$ 11 | 61 $\pm$ 7 | 61 $\pm$ 12 | 62 $\pm$ 8  |
| 045-TLD4 | Southwest of Bldg. 1005S      | 62 $\pm$ 6  | 68 $\pm$ 7  | 58 $\pm$ 5 | 61 $\pm$ 11 | 62 $\pm$ 9  |
| 045-TLD5 | West-Southwest of Bldg. 1005S | 61 $\pm$ 5  | 70 $\pm$ 11 | 60 $\pm$ 7 | 59 $\pm$ 8  | 62 $\pm$ 8  |
| 049-TLD1 | East Firebreak                | 66 $\pm$ 16   | 55 $\pm$ 13 | 62 $\pm$ 2 | 64 $\pm$ 9  | 66 $\pm$ 14 |
| 053-TLD1 | West Firebreak                | 72 $\pm$ 6  | 74 $\pm$ 17 | 65 $\pm$ 9 | 67 $\pm$ 8  | 70 $\pm$ 8  |
| 055-TLD1 | Thomson and Fifth             | NYP   | NYP         | 59 $\pm$ 8 | 63 $\pm$ 10 | 63 $\pm$ 3  |
| 055-TLD2 | Building 935                  | NYP   | NYP         | 59 $\pm$ 8 | 62 $\pm$ 10 | 65 $\pm$ 7  |
| 063-TLD1 | West Firebreak                | 71 $\pm$ 4  | 74 $\pm$ 9  | 65 $\pm$ 6 | 71 $\pm$ 9  | 72 $\pm$ 8  |
| 065-TLD1 | Building 820                  | NYP   | NYP         | 63 $\pm$ 7 | 62 $\pm$ 13 | 63 $\pm$ 7  |

(continued on next page)



**Table 8-1.** Five-Year Annual On-Site Direct Ambient Radiation Measurements (2020-2024) (*concluded*).

| TLD#                         | Location                         | Annual Total Dose, mrem ( $\pm 2\sigma$ , 95% conf. interval) |             |             |             |             |
|------------------------------|----------------------------------|---|-------------|-------------|-------------|-------------|
|                              |                                  | 2020  | 2021        | 2022        | 2023        | 2024        |
| 066-TLD1                     | Waste Management Facility        | 55 $\pm$ 5  | 64 $\pm$ 13 | 58 $\pm$ 14 | 54 $\pm$ 5  | 54 $\pm$ 9  |
| 073-TLD1                     | Meteorology Tower                | 69 $\pm$ 10   | 68 $\pm$ 11 | 64 $\pm$ 3  | 70 $\pm$ 14 | 65 $\pm$ 5  |
| 074-TLD1                     | Bldg. 560                        | 65 $\pm$ 10   | 73 $\pm$ 13 | 69 $\pm$ 5  | 64 $\pm$ 5  | 71 $\pm$ 4  |
| 074-TLD2                     | Bldg. 907                        | 62 $\pm$ 9  | 69 $\pm$ 12 | 58 $\pm$ 6  | 60 $\pm$ 14 | 63 $\pm$ 5  |
| 080-TLD1                     | East Firebreak                   | 66 $\pm$ 5  | 75 $\pm$ 11 | 67 $\pm$ 7  | 68 $\pm$ 9  | 67 $\pm$ 9  |
| 082-TLD1                     | West Firebreak                   | 74 $\pm$ 9  | 82 $\pm$ 8  | 68 $\pm$ 4  | 71 $\pm$ 12 | 73 $\pm$ 7  |
| 084-TLD1                     | Tennis Courts                    | 65 $\pm$ 8  | 70 $\pm$ 7  | 66 $\pm$ 6  | 65 $\pm$ 6  | 67 $\pm$ 6  |
| 085-TLD1                     | Bldg. 735                        | 65 $\pm$ 12   | 69 $\pm$ 14 | 63 $\pm$ 10 | 58 $\pm$ 12 | 61 $\pm$ 9  |
| 085-TLD2                     | Upton Gas Station                | 67 $\pm$ 9  | 69 $\pm$ 10 | 63 $\pm$ 6  | 64 $\pm$ 10 | 67 $\pm$ 7  |
| 085-TLD3                     | NSLS-II LOB 745                  | 66 $\pm$ 6  | 72 $\pm$ 7  | 64 $\pm$ 12 | 64 $\pm$ 11 | 67 $\pm$ 7  |
| 086-TLD1                     | Baseball Fields                  | 66 $\pm$ 8  | 69 $\pm$ 9  | 62 $\pm$ 13 | 63 $\pm$ 8  | 63 $\pm$ 5  |
| 086-TLD2                     | NSLS-II LOB 741                  | 61 $\pm$ 17   | 65 $\pm$ 9  | 58 $\pm$ 8  | 55 $\pm$ 11 | 58 $\pm$ 11 |
| 086-TLD3                     | NSLS-II LOB 742                  | 62 $\pm$ 12   | 66 $\pm$ 12 | 56 $\pm$ 10 | 57 $\pm$ 11 | 61 $\pm$ 7  |
| 090-TLD1                     | North St. Gate                   | 61 $\pm$ 8  | 49 $\pm$ 7  | 59 $\pm$ 7  | 61 $\pm$ 7  | 61 $\pm$ 8  |
| 095-TLD1                     | NSLS-II LOB 744                  | 70 $\pm$ 13   | 77 $\pm$ 19 | 69 $\pm$ 8  | 68 $\pm$ 15 | 71 $\pm$ 9  |
| 096-TLD1                     | NSLS-II LOB 743                  | 58 $\pm$ 8  | 64 $\pm$ 15 | 56 $\pm$ 7  | 56 $\pm$ 11 | 61 $\pm$ 8  |
| 105-TLD1                     | South Firebreak                  | 69 $\pm$ 10   | 73 $\pm$ 10 | 66 $\pm$ 6  | 63 $\pm$ 13 | 66 $\pm$ 15 |
| 108-TLD1                     | Water Tower                      | 64 $\pm$ 5  | 68 $\pm$ 9  | 64 $\pm$ 5  | 63 $\pm$ 6  | 74 $\pm$ 15 |
| 108-TLD2                     | Tritium Pole                     | 78 $\pm$ 9  | 85 $\pm$ 5  | 78 $\pm$ 8  | 74 $\pm$ 13 | 74 $\pm$ 11 |
| 111-TLD1                     | Trailer Park                     | 66 $\pm$ 9  | 73 $\pm$ 6  | 64 $\pm$ 7  | 61 $\pm$ 5  | 68 $\pm$ 11 |
| 122-TLD1                     | South Firebreak                  | 61 $\pm$ 6  | 68 $\pm$ 12 | 55 $\pm$ 2  | 58 $\pm$ 10 | 65 $\pm$ 12 |
| 126-TLD1                     | South Gate                       | 72 $\pm$ 13   | 76 $\pm$ 10 | 68 $\pm$ 2  | 69 $\pm$ 11 | 74 $\pm$ 9  |
| P2                           | NW Corner Site Perimeter Station | 56 $\pm$ 5  | 60 $\pm$ 10 | 50 $\pm$ 5  | 55 $\pm$ 8  | 54 $\pm$ 6  |
| P4                           | SW Corner Site Perimeter Station | 59 $\pm$ 10   | 68 $\pm$ 9  | 57 $\pm$ 5  | 55 $\pm$ 10 | 63 $\pm$ 16 |
| P7                           | SE Corner Site Perimeter Station | 66 $\pm$ 10   | 71 $\pm$ 15 | 62 $\pm$ 11 | 63 $\pm$ 11 | 64 $\pm$ 6  |
| S5                           | Sewage Treatment Plant           | 61 $\pm$ 9  | 67 $\pm$ 11 | 60 $\pm$ 6  | 60 $\pm$ 9  | 59 $\pm$ 6  |
| On-site average              |                                  | 64 $\pm$ 9  | 68 $\pm$ 11 | 61 $\pm$ 7  | 62 $\pm$ 10 | 64 $\pm$ 8  |
| Off-site average (Table 8-2) |                                  | 61 $\pm$ 14   | 68 $\pm$ 11 | 58 $\pm$ 6  | 61 $\pm$ 10 | 62 $\pm$ 8  |
| 075-TLD4                     | Control TLD Average              | 29 $\pm$ 4  | 35 $\pm$ 12 | 26 $\pm$ 3  | 25 $\pm$ 3  | 27 $\pm$ 4  |

See Fig. 8-1 for TLD Locations

NYP = Not Yet Posted. TLDs were added at these locations for additional major facility emissions monitoring in the vicinity.

**Table 8-2.** Five-Year Annual Off-Site Direct Ambient Radiation Measurements (2020-2024).

| TLD#                           | Location                 | Annual Total, mrem ( $\pm 2\sigma$ , 95% Conf. Interval) |             |             |             |             |
|--------------------------------|--------------------------|--|-------------|-------------|-------------|-------------|
|                                |                          | 2020   | 2021        | 2022        | 2023        | 2024        |
| 000-TLD5                       | Longwood Estate          | 58 $\pm$ 7   | 60 $\pm$ 14 | 50 $\pm$ 4  | 56 $\pm$ 12 | 58 $\pm$ 4  |
| 000-TLD9                       | Private property         | 61 $\pm$ 13  | 74 $\pm$ 21 | 60 $\pm$ 18 | 81 $\pm$ 20 | 78 $\pm$ 33 |
| 000-TLD10                      | Private property         | 61 $\pm$ 16  | 69 $\pm$ 8  | 60 $\pm$ 3  | 65 $\pm$ 9  | 62 $\pm$ 5  |
| 200-TLD1                       | Private property         | 70 $\pm$ 20  | 78 $\pm$ 25 | 60 $\pm$ 8  | 59 $\pm$ 9  | 63 $\pm$ 8  |
| 200-TLD5                       | Private property         | 69 $\pm$ 38  | 80 $\pm$ 14 | 74 $\pm$ 6  | 75 $\pm$ 24 | ND          |
| 200-TLD6                       | Private property         | ND   | ND          | ND          | ND          | 53 $\pm$ 9  |
| 400-TLD1                       | Calverton Nat. Cemetery  | 67 $\pm$ 8   | 72 $\pm$ 6  | 64 $\pm$ 6  | 65 $\pm$ 11 | 68 $\pm$ 6  |
| 400-TLD2                       | Private property         | ND   | ND          | ND          | ND          | 62 $\pm$ 7  |
| 600-TLD3                       | Private property         | 65 $\pm$ 10  | 69 $\pm$ 7  | ND          | ND          | ND          |
| 600-TLD4                       | Maples B&G               | 59 $\pm$ 10  | 64 $\pm$ 5  | 58 $\pm$ 4  | 60 $\pm$ 8  | 61 $\pm$ 2  |
| 700-TLD4                       | Private property         | 56 $\pm$ 9   | 65 $\pm$ 7  | 57 $\pm$ 9  | 57 $\pm$ 8  | 60 $\pm$ 8  |
| 800-TLD1                       | Private property         | 63 $\pm$ 11  | 69 $\pm$ 11 | 58 $\pm$ 5  | 55 $\pm$ 7  | 60 $\pm$ 7  |
| 800-TLD3                       | Suffolk County CD        | 63 $\pm$ 12  | 62 $\pm$ 6  | 57 $\pm$ 6  | 60 $\pm$ 12 | 59 $\pm$ 9  |
| 800-TLD4                       | LI Nat'l Wildlife Refuge | 59 $\pm$ 10  | 64 $\pm$ 12 | 54 $\pm$ 7  | 56 $\pm$ 2  | 56 $\pm$ 5  |
| 900-TLD2                       | Private property         | 56 $\pm$ 14  | 64 $\pm$ 11 | 55 $\pm$ 9  | 62 $\pm$ 9  | ND          |
| 900-TLD5                       | Private property         | 49 $\pm$ 8   | 55 $\pm$ 14 | 41 $\pm$ 5  | 47 $\pm$ 2  | 59 $\pm$ 9  |
| 900-TLD7                       | Private property         | 64 $\pm$ 18  | 72 $\pm$ 12 | 56 $\pm$ 3  | 61 $\pm$ 20 | 62 $\pm$ 8  |
| 999-TLD1                       | Private property         | 64 $\pm$ 18  | 65 $\pm$ 14 | 59 $\pm$ 1  | 60 $\pm$ 7  | 58 $\pm$ 4  |
| 999-TLD2                       | Private property         | 61 $\pm$ 13  | 73 $\pm$ 7  | 64 $\pm$ 8  | 63 $\pm$ 5  | 67 $\pm$ 7  |
| Off-site average               |                          | 61 $\pm$ 14  | 68 $\pm$ 11 | 58 $\pm$ 6  | 61 $\pm$ 10 | 62 $\pm$ 8  |
| 075-TLD4 : Control TLD Average |                          | 29 $\pm$ 4   | 35 $\pm$ 12 | 26 $\pm$ 3  | 25 $\pm$ 3  | 27 $\pm$ 4  |

See Fig. 8-2 for TLD Locations

Note: TLDs are placed by volunteers or other entities. Year-to-year, willingness to participate varies among owners at these locations.

ND = Not Deployed

Locations are no longer shown here if no history in five years.

## 8.2.2 Facility Area Monitoring

Ten on-site TLDs are designated as facility area monitors (FAMs) because they are posted in areas known to present slightly elevated radiation levels (i.e., near facilities). Table 8-3 shows the external doses measured with the FAM TLDs from 2020 to 2024. Environmental TLDs 088-TLD1 through 088-TLD4 are posted at and near the S6 blockhouse location on the fence of the Former Waste Management Facility (FWMF). Except for the doses at S6 and 088-TLD4, which were closer to the site average dose, the TLDs measured external doses that were slightly elevated compared to the normal natural background radiation doses measured in other areas on-site. This can be attributed to the presence of small amounts of contamination in the soil. As shown in Table 8-3, overall dose levels near the FWMF have been fairly consistent. Access to the FWMF is controlled by fencing.

Two TLDs, 075-TLD3 and 075-TLD5, near Building 356 showed an annual dose of  $76 \pm 12$  mrem ( $760 \pm 120$   $\mu$ Sv) and  $74 \pm 21$  mrem ( $740 \pm 210$   $\mu$ Sv), respectively. These doses are higher than the on-site annual average because Building 356 houses a Cobalt-60 (Co-60) source which is used to irradiate materials, parts, and printed circuit boards, and its collimators were removed in 2018 to allow targets to be placed closer to the source due to source decay. In addition, the source is exposed for longer periods, sometimes overnight, and generates “skyshine.” However, in 2024 the doses were once again lower due to a demand-related drop in usage. Although it is conceivable for individuals who use the parking lot adjacent to Building 356 to receive a dose from these sources, the dose would be small due to the low occupancy factor.



Three FAM TLDs near Building 914 and placed on fence sections northeast and northwest of Building 913B (the AGS tunnel access) showed slightly elevated ambient external dose levels. The full-year doses at these sites were measured at  $88 \pm 30$  mrem ( $880 \pm 300$  uSv) for 054-TLD1,  $86 \pm 25$  mrem ( $860 \pm 250$  uSv) for 054-TLD2, and  $81 \pm 24$  mrem ( $810 \pm 240$  uSv) for 054-TLD3 (compared to the on-site dose of  $64 \pm 8$  mrem and off-site dose of  $62 \pm 8$  mrem). The slightly higher levels of the first and second quarters (not shown) are expected because the operating period for the AGS is typically in the first half of the calendar year.

**Table 8-3.** Facility Area Monitoring Measurements of Direct Ambient Radiation (2020-2024).

| TLD#     | Location                  | Annual Total, mrem ( $\pm 2\sigma$ , 95% Conf. Interval) |             |             |             |             |
|----------|---------------------------|--|-------------|-------------|-------------|-------------|
|          |                           | 2020   | 2021        | 2022        | 2023        | 2024        |
| 054-TLD1 | Bldg. 914                 | $65 \pm 12$  | $79 \pm 25$ | $87 \pm 12$ | $90 \pm 12$ | $88 \pm 30$ |
| 054-TLD2 | NE of Bldg. 913B          | $66 \pm 13$  | $77 \pm 26$ | $84 \pm 6$  | $82 \pm 6$  | $86 \pm 25$ |
| 054-TLD3 | NW of Bldg. 913B          | $66 \pm 13$  | $77 \pm 30$ | $79 \pm 9$  | $80 \pm 12$ | $81 \pm 24$ |
| S6       | FWMF                      | $69 \pm 11$  | $73 \pm 10$ | $64 \pm 6$  | $67 \pm 7$  | $69 \pm 10$ |
| 088-TLD1 | FWMF, 50' East of S6      | $79 \pm 7$   | $87 \pm 12$ | $73 \pm 1$  | $73 \pm 7$  | $78 \pm 7$  |
| 088-TLD2 | FWMF, 50' West of S6      | $77 \pm 14$  | $76 \pm 14$ | $68 \pm 2$  | $75 \pm 11$ | $73 \pm 11$ |
| 088-TLD3 | FWMF, 100' West of S6     | $74 \pm 11$  | $80 \pm 11$ | $70 \pm 7$  | $74 \pm 12$ | $75 \pm 6$  |
| 088-TLD4 | FWMF, 150' West of S6     | $66 \pm 11$  | $71 \pm 12$ | $62 \pm 2$  | $65 \pm 8$  | $66 \pm 2$  |
| 075-TLD3 | Bldg. 356                 | $99 \pm 9$   | $83 \pm 11$ | $84 \pm 26$ | $79 \pm 8$  | $76 \pm 12$ |
| 075-TLD5 | North Corner of Bldg. 356 | $107 \pm 14$   | $92 \pm 23$ | $92 \pm 34$ | $77 \pm 5$  | $74 \pm 21$ |

See Figure 8-1 for TLD Locations.

FWMF = Former Waste Management Facility


### 8.2.2.1 Neutron Monitoring

The AGS accelerates protons to energies up to 30 GeV and heavy ions up to 15 GeV/amu. At the RHIC, protons and heavy ions received from the AGS are further accelerated up to final energies of 250 GeV for protons and 100 GeV for ions. Under these high-energy conditions, such accelerated particles have the potential to generate high-energy neutrons when the particles leave the walls of the accelerator and produce nuclear fragments along their path or as they collide with matter. In 2024, 11 pairs of neutron monitoring TLDs (Harshaw Badge 8814) were posted at strategic locations to measure the dose contribution from the high-energy neutrons (see Figure 8-3 for locations).

**Photo 8-3.** Neutron TLDs in Monitored Area.



The placement of neutron TLDs is based on facility design aspects such as the thickness of the berm shielding, location of soil activation areas, beam stop areas, beam collimators, and proximity to the site boundary. The neutron TLDs are placed on polyethylene cylinders so that incident neutrons, which are at a high enough energy to pass through the TLD undetected, are thermalized by the hydrocarbons in the polyethylene and reflected back out, where the TLD can detect them. The neutron TLDs are mounted in pairs, for three reasons: the dose registered on these TLDs is low, so a matching number on the second TLD adds confidence to the dose measured by the first one; two neutron TLDs side-by-side decreases the potential dependence of measured dose on mounting orientation; and the reflected neutron could strike either neutron TLD and be counted (see Photo 8-3).

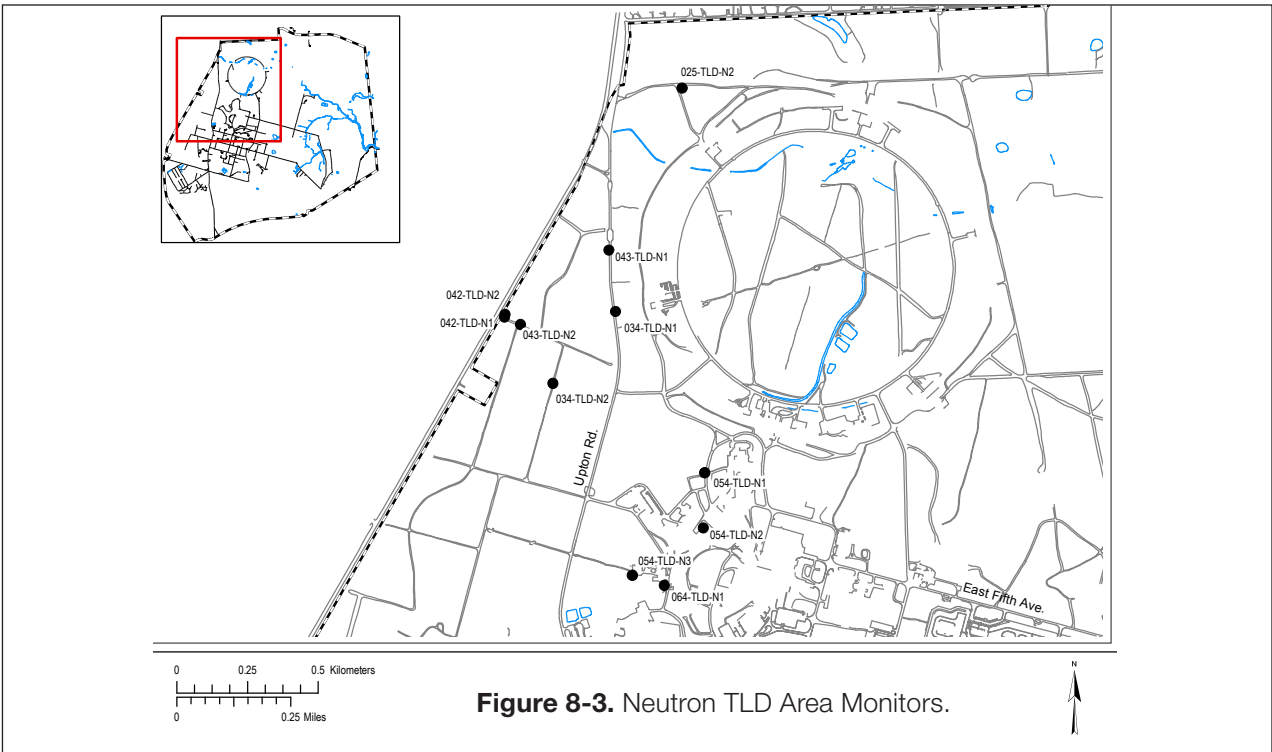**Table 8-4.** Five-Year Annual Neutron Monitoring Results (2020-2024).

| Neutron<br>TLD # | Location ID No. | Annual Total, mrem neutron |      |      |      |      |
|------------------|-----------------|----------------------------|------|------|------|------|
|                  |                 | 2020                       | 2021 | 2022 | 2023 | 2024 |
| TK277            | 025-TLD-N2      | 2                          | 2    | 3    | 3    | 0    |
| TK278            | "               | 0                          | 1    | 1    | 1    | 2    |
| TK279            | 034-TLD-N1      | 1                          | 0    | 2    | 2    | 1    |
| TK280            | "               | 0                          | 2    | 1    | 3    | 0    |
| TK281            | 034-TLD-N2      | 0                          | 0    | 2    | 1    | 1    |
| TK282            | "               | 0                          | 1    | 2    | 1    | 1    |
| TK283            | 043-TLD-N1      | 1                          | 2    | 2    | 2    | 1    |
| TK284            | "               | 0                          | 1    | 1    | 0    | 0    |
| TK285            | 043-TLD-N2      | 0                          | 1    | 1    | 2    | 3    |
| TK286            | "               | 0                          | 1    | 0    | 1    | 1    |
| TK287            | 042-TLD-N1      | 1                          | 1    | 1    | 2    | 2    |
| TK288            | "               | 0                          | 2    | 2    | 2    | 1    |
| TK289            | 042-TLD-N2      | 0                          | 1    | 1    | 1    | 1    |
| TK290            | "               | 0                          | 1    | 2    | 0    | 2    |
| TK291            | 054-TLD-N1      | 2                          | 0    | 0    | 0    | 1    |
| TK292            | "               | 0                          | 0    | 2    | 1    | 0    |
| TK293            | 054-TLD-N2      | 0                          | 3    | 2    | 0    | 1    |
| TK294            | "               | 0                          | 3    | 0    | 0    | 2    |
| TK295            | 054-TLD-N3      | 0                          | 1    | 1    | 0    | 2    |
| TK296            | "               | 2                          | 1    | 0    | 0    | 2    |
| TK297            | 064-TLD-N1      | 0                          | 0    | 0    | 0    | 0    |
| TK298            | "               | 1                          | 0    | 0    | 0    | 1    |
| PM-bkg           |                 | 1                          | 2    | 2    | 4    | 3    |

"PM-bkg" = The background dose-rate levels in the Personnel Monitoring (PM) counting room where the TLDs are stored and prepared for issue.

Table 8-4 shows the measured ambient neutron doses recorded from 2020 to 2024. In 2024, ten neutron TLDs showed 1 mrem, six showed 2 mrem, and one showed 3 mrem. Five neutron TLDs showed no dose. All of these low-level neutron doses indicate that engineering controls (i.e., berm shielding) in place at AGS and RHIC are effective.

### 8.3

## Dose Modeling for Airborne Radionuclides

The EPA regulates radiological emissions from DOE facilities under the requirements set forth in 40 CFR 61, Subpart H, National Emission Standards for Emissions of Radionuclides Other than Radon from Department of Energy Facilities. This regulation specifies the compliance and monitoring requirements for reporting radiation doses received by members of the public from airborne radionuclides. The regulation mandates that no member of the public shall receive a dose greater than 10 mrem (100  $\mu$ Sv) in a year from airborne emissions from DOE facilities.



*Sampling station for airborne tritium in the HFBR building exhaust.*

The emission monitoring requirements include the use of a reference method for continuous monitoring at major release points (defined as those with a potential to exceed 1% of the 10 mrem standard) and periodic confirmatory measurements for all other release points. The regulations also require DOE facilities to submit an annual National Emission Standards for Hazardous Air Pollutants (NESHAPs) report to the EPA that describes the major and minor emission sources, their releases, and their resultant dose to the MEOSI. The dose estimates from various facilities are provided in Table 8-5, and the actual air emissions for 2024 are discussed in detail in Chapter 4.

As a part of the NESHAPs review process at BNL, any emission source, such as a stack, that has the potential to release airborne radioactive materials is evaluated for regulatory compliance. Under the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA), certain remediation activities are also monitored and assessed for any potential to release airborne radioactive materials, and to determine their dose contribution, if any, to the environment. Any new radiological processes or activities are also evaluated for compliance with NESHAPs regulations using the EPA's approved dose modeling software (see Section 8.2.1 for details). Because this model is designed to treat radioactive emission sources as continuous over the course of a year, it is not well-suited for estimating the dose from short-term or acute releases. Consequently, the modeling software overestimates potential dose contributions from short-term projects and area sources. For that reason, such modeling results are conservative.

**Table 8-5.** Maximally Exposed Off-site Individual Effective Dose Equivalent From Facilities or Routine Processes, 2024.

| Building No.                                    | Facility or Process (f)              | Construction Permit No. | MEOSI Dose (mrem) (a) | Notes |
|---|--------------------------------------|-------------------------|-----------------------|-------|
| 120   | Radiological Control Division        | None                    | ND                    | (e)   |
| 348   | Instrumentation & Calibration        | None                    | ND                    | (e)   |
| 463   | Biology                              | None                    | 4.40E-08              | (b)   |
| 480   | Condensed Matter Physics             | None                    | ND                    | (e)   |
| 490/490A  | Personnel Monitoring                 | None                    | 6.70E-05              | (b)   |
| 463   | DJ / EBNN                            | None                    | 1.08E-15              | (b)   |
| 510   | Physics                              | None                    | ND                    | (e)   |
| 535   | Instrumentation                      | None                    | 1.02E-13              | (b)   |
| 555   | Chemistry Facility                   | None                    | 7.68E-11              | (b)   |
| 734   | Interdisciplinary Science Building   | None                    | 9.07E-15              | (b)   |
| 735   | Center for Functional Nanomaterials  | None                    | ND                    | (e)   |
| 745   | NSLS-II                              | None                    | 1.17E-04              | (b)   |
| 750   | HFBR                                 | None                    | 6.71E-05              | (c)   |
| 801   | RRPL                                 | BNL-2022-01             | 1.79E-04              | (b,c) |
| 815   | Nonproliferation & National Security | None                    | 2.39E-11              | (b)   |
| 817   | Nuclear Science & Technology         | None                    | 9.10E-09              | (b)   |
| 820   | Accelerator Test Facility            | BNL-589-01              | ND                    | (e)   |
| 830   | Environmental Science Department     | None                    | ND                    | (e)   |
| 865   | Waste Management Facility            | None                    | ND                    | (e)   |
| 902   | Superconducting Magnet Division      | None                    | ND                    | (e)   |
| 906   | Imaging Lab                          | None                    | ND                    | (e)   |
| 911   | Collider- Accelerator                | None                    | ND                    | (e)   |
| 925   | RF Systems                           | None                    | ND                    | (e)   |
| 931   | BLIP                                 | BNL-2009-01             | 1.67E+00              | (c)   |
| 938   | REF / NBTF                           | BNL-789-01              | ND                    | (e)   |
| 942   | AGS Booster                          | BNL-188-01              | ND                    | (d)   |
| ---   | RHIC                                 | BNL-388-01              | ND                    | (e)   |
| <b>Total Potential Dose from BNL Operations</b> |                                      |                         | <b>1.67E+00</b>       |       |
| <b>EPA Limit (Air Emissions)</b>                |                                      |                         | <b>10</b>             |       |

## Notes:

MEOSI = Maximally Exposed Off-site Individual

ND = No Dose

(a) "Dose" in this table means effective dose equivalent to MEOSI in mrem.

(b) Dose is based on emissions calculated using 40CFR61, Appendix D methodology.

(c) Emissions are continuously monitored at the facility.

(d) Booster ventilation system prevents air release through continuous air recirculation.

(e) No radiological dispersible material inventory in 2024.

(f) Sealed sources were excluded from this inventory – no emission.



### 8.3.1 Dose Modeling Program

Compliance with NESHAPs regulations is demonstrated using EPA dose-modeling software and the Clean Air Act Assessment Package 1988 (CAP88-PC). This computer program uses a Gaussian plume model to characterize the average dispersion of airborne radionuclides released from elevated stacks or diffuse sources. CAP88-PC then calculates the EDE to the MEOSI from the airborne radionuclides released to the environment. Site-specific meteorology data is used to calculate annual emission dispersions for the midpoint of a given wind sector and distance.

Facility-specific radionuclide emission rates (Ci/yr) were used for continuously monitored facilities. For small sources, the emissions were calculated using the method set forth in 40 CFR 61, Appendix D. CAP88-PC calculated the EDE at the MEOSI location from the immersion, inhalation, and ingestion pathways, and also calculated the collective population dose within a 50-mile radius of the emission source.

These dose and risk calculations to the MEOSI are based on low-level emissions and chronic intakes. In most cases, the CAP88-PC model provides conservative dose estimates. For the purpose of modeling their dose to the MEOSI, all emissions except those from Building 801 are treated as having been released from the BLIP Facility (see Figure 4-1 in Chapter 4, section 4.2), which is used to represent the developed portion of the site.

The dose calculations are based on very low concentrations of environmental releases and on chronic, continuous intakes in a year. The input parameters used in the model include radionuclide type, emission rate in Curies (Ci) per year, stack parameters such as height and diameter, and emission exhaust velocity. Site-specific weather and population data are also factored into the dose assessment. As mentioned earlier, weather data are supplied by measurements from the Laboratory's meteorological towers. Such measurements include wind speed, direction, and frequency, as well as air temperature and precipitation amount (see Chapter 1 for details). Solar radiation effects are also accounted for. A population of six million people surrounding BNL, based on the 2020 U.S. Census and the Geographical Information System design population survey performed in 2021 by Oak Ridge National Laboratory for BNL, was used in the model.

The 2024 effective dose equivalents were estimated using Version 4.0.1.17 of CAP88-PC. The following approaches and assumptions supported the dose estimates in this annual report:

- A conservative approach is used for agricultural data input to the CAP88 modeling program, with 92% of vegetables, 100% of milk, and 99% of meat assumed to originate from the assessment area. The nearest farm is 5.4 km southeast of the BLIP facility.
- The velocity of the exhaust from the BLIP facility stack was updated to reflect 2024's operation. The average volumetric flow rate of the BLIP exhaust system in 2024 was 466 cfm, or 0.220 m<sup>3</sup>/sec. With an exit diameter of 0.1 m, the exit velocity was 28.0 m/sec, down slightly from last year's 30.83 m/sec.
- The method of characterizing atmospheric stability for purposes of estimating effluent dispersion was the Solar Radiation/Delta Temperature method for conservatism. This is because the method takes into account the greatest range of variations in atmospheric conditions, such as solar radiation heating and cooling, and results in the highest dose in comparison to the other known methods.

## 8.3.2 Dose Calculation Methods and Pathways

### 8.3.2.1 Maximally Exposed Off-Site and On-Site Individual

The MEOSI is defined as a person who resides at a residence, office, or school located beyond the BNL site boundary such that no other member of the public could receive a higher dose. This person is assumed to reside 24 hours a day, 365 days a year, off-site, and close to the emission point nearest to the BNL site boundary. The MEOSI is also assumed to consume significant amounts of fish and deer containing radioactivity assumed to be attributable to Laboratory operations, based on projections from the New York State Department of Health (NYSDOH). It is highly unlikely that such a combination of “maximized dose” to any single individual would occur, but the concept is useful for evaluating maximum potential dose and risk to members of the public. The dose to the on-site MEI who could receive any dose outside of BNL’s controlled areas was determined by TLD measurements (see Table 8-6). The dose to the MEI on-site (near Building 356) was measured at 4 mrem in 2024. The decrease in MEI dose in 2024 was due to a decrease in research irradiation conducted with a Co-60 source in Building 356 during the year, as discussed in section 8.1.2. The 4-mrem dose to the on-site MEI is less than the dose expected from two round-trip flights from Los Angeles, California to New York, New York, and equal to about 1.3% of the average annual natural background in the U.S. of 310 mrem.

**Table 8-6.** Five-Year Annual Maximally Exposed On-site Individual Dose (2020-2024).

| TLD#  | Location        | Annual Total, mrem |      |      |      |      |
|-------|-----------------|--------------------|------|------|------|------|
|       |                 | 2020               | 2021 | 2022 | 2023 | 2024 |
| TK154 | 2nd Floor, B120 | 27                 | 3    | 26   | 8    | 4    |
| TK155 | 1st Floor, B120 | 18                 | 7    | 21   | 3    | 3    |

### 8.3.2.2 Dose Calculation: Fish Ingestion

To calculate the EDE from fish consumption, the annual intake is estimated first, which is defined at BNL as the average weight of fish consumed in a year by a Reference Person engaged in recreational fishing on the Peconic River. Based on a NYSDOH study, that annual consumption rate is estimated at 15 pounds (7 kg) per year (NYSDOH 1996). For each radionuclide of concern for fish samples, the dry weight activity concentration is converted to pico-Curies per gram (pCi/g) wet weight, since wet weight is the form in which fish are caught and consumed. A committed effective dose coefficient for water or milk ingested by an adult, as listed in DOE-STD-1196-2022, Table A-1, is used for each radionuclide to convert the activity concentration to the EDE. The dose is calculated as: dose in (rem/yr) = intake (kg/yr) × activity in flesh (μCi/kg) × dose coefficient (rem/μCi). For BNL’s case, the committed effective dose coefficient for Cs-137 is 5.03E-02 rem/μCi.

### 8.3.2.3 Dose Calculation: Deer Meat Ingestion

The dose calculation for deer meat ingestion is the same as for fish consumption. The same Cs-137 committed effective dose coefficient was used to estimate dose. No other radionuclides associated with Laboratory operations have been detected in deer meat. The total quantity of deer meat ingested during a year has been estimated by the NYSDOH at 64 pounds (29 kg) (NYSDOH 1999).

## 8.4

### Sources: Diffuse, Fugitive, “Other”

Diffuse sources, also known as non-point or area sources, are described as sources of radionuclides which diffuse into the atmosphere but do not have well-defined emission points. Fugitive sources include leaks through window and door frames, as well as unintended releases to the air through vents (i.e., leaks from vents are fugitive sources). As part of the NESHAPs review process, in addition to stack emissions, any fugitive or diffuse emission source that could potentially emit radioactive materials to the environment is evaluated. Although CERCLA-prompted actions, such as remediation projects, are exempt from procedural requirements to obtain federal, state, or local permits, any BNL activity or process with the potential to emit radioactive material must be evaluated and assessed for potential dose impact to members of the public.

#### 8.4.1 Remediation Work

There was no remediation work with the potential for radiological air emissions performed at BNL in 2024.

## 8.5

### Dose from Air Emission-Monitored Facilities

#### Actively Monitored Facilities

##### 8.5.1 Brookhaven LINAC Isotope Producer (BLIP)

Source term descriptions for point sources are given in Chapter 4. In 2024, the BLIP facility was the only emission source with the potential to contribute dose to members of the public greater than 1% of the EPA limit (0.1 mrem or 1.0  $\mu$ Sv). The BLIP facility is considered a major emission source in accordance with the ANSI N13.1-2011 standard's graded approach, specifically a Potential Impact Category (PIC) of II.

The gaseous emissions from BLIP are directly and continuously measured in real time with an inline, low-resolution Sodium Iodide (NaI) gamma spectrometer. The spectrometer system is connected to a computer workstation that is used to continuously record and display emission levels. The particulate emissions are sampled for gross alpha and gross beta activity weekly, using a conventional glass-fiber filter which is analyzed at an off-site contract analytical laboratory. Likewise, exhaust samples for tritium are also collected continuously using a silica gel adsorbent which is then analyzed at an off-site contract analytical laboratory on a weekly basis.

In 2024, the BLIP facility was active for 39.14 weeks. Therefore, typical isotopes Carbon-11 (C-11) (half-life: 20.4 minutes) and Oxygen-15 (O-15) (half-life: 122 seconds) were released during operation. A small quantity (7.16E-02 Ci) of residual tritiated water vapor from activation of the targets' cooling water was released since the exhaust system ran continuously, as well. The EDE to the MEOSI from BLIP operations was calculated to be 1.67 mrem (16.7  $\mu$ Sv) in a year.

##### 8.5.2 Radionuclide Research and Production Laboratory (RRPL) (formerly Target Processing Laboratory)

In 2024, there were minor amounts of Iodine-131 on two occasions emitted from the RRPL that had an insignificant impact on the MEOSI dose for the site. See Table 8-5 for the dose from the RRPL.

### 8.5.3 High Flux Beam Reactor (HFBR)

In 2024, the residual tritium emissions from the HFBR facility were measured at 0.29 Ci, and the estimated dose attributed to those emissions was  $6.71\text{E-}5$  mrem ( $6.71\text{E-}4$   $\mu\text{Sv}$ ) in a year.

### 8.5.4 Waste Management Facility

In 2024, there were no detectable levels of emissions from the Waste Management Facility.

## Inactive Facilities

### 8.5.5 Brookhaven Medical Research Reactor (BMRR)

In 2024, the BMRR facility remained in a cold shut-down mode as a radiological facility with institutional controls in place. The stack for the BMRR was demolished and removed in August 2022. There was no dose contribution from the BMRR in 2024.

### 8.5.6 Brookhaven Graphite Research Reactor (BGRR)

In 2024, long-term surveillance of the BGRR continued, as well as the maintenance and periodic refurbishment of structures, systems, and components. This status will continue throughout the period of radioactive decay. There were no radionuclides released to the environment from the complex in 2024.

### 8.5.7 Unplanned Releases

There were no unplanned releases at BNL in 2024.

## 8.6

## Dose From Ingestion

Radionuclides in the environment may bioaccumulate in deer and fish tissue, bones, and organs. Consequently, samples collected from deer and fish are analyzed to evaluate the contribution of dose to humans from the ingestion pathway.

As discussed in Chapter 6, section 6.3.1, deer meat samples collected on- and off-site near the BNL boundary were used to assess the potential dose impact of deer meat ingestion to the MEOSI. For annual reporting, the maximum tissue concentration in the deer meat collected for sampling is used to calculate the potential dose to the MEOSI. At BNL, Potassium-40 (K-40) and Cs-137 are historically detected in the tissue samples, but K-40 is a naturally occurring radionuclide unrelated to BNL operations.

In 2024, BNL collected samples from 15 deer, 12 of those from a managed cull, and analyzed them for K-40 and Cs-137. It should be noted that, since the site boundaries are not fenced, deer are able to travel back and forth across the site boundary, so the sample data is gathered from the entire aggregate of sample analyses.

From Table 6-2, the average K-40 concentration in all deer tissue samples (All Samples) was  $2.97 \pm 0.48$  pCi/g (wet weight) in the tissue (i.e., meat) and  $2.42 \pm 0.21$  pCi/g (wet weight) in the liver. The average K-40 concentration in culled deer tissue samples (managed cull) was  $2.96 \pm 0.49$  pCi/g (wet weight). The average K-40 concentration in culled deer liver samples was  $2.24 \pm 0.21$  pCi/g (wet weight). The maximum Cs-137 tissue concentration in all samples (non-culled and culled) was  $0.42 \pm 0.05$  pCi/g (wet weight). This Cs-137

tissue concentration was used for MEOSI dose calculations. Therefore, the maximum estimated dose to humans from consuming deer meat containing the maximum Cs-137 concentration was estimated to be 0.61 mrem (6.10  $\mu$ Sv) in a year. This dose is below the health advisory limit of 10 mrem (100  $\mu$ Sv) established by NYSDOH.

The Laboratory maintains an ongoing program of collecting and analyzing fish from the on-site portions of the Peconic River and surrounding freshwater bodies. However, the Peconic River is an intermittent stream, with flow occurring predominantly via groundwater discharge in the Spring and Fall (i.e., a “gaining” stream) and completely drying up during dry periods (i.e., a “losing” stream). In 2024, the Peconic River on-site had water only sufficient to support a few fish. Therefore, no fish were collected. As a result, there was no measured dose attributed to BNL legacy Cs-137 levels in fish in the Peconic River.

## 8.7

### Dose to Aquatic and Terrestrial Biota

DOE-STD-1153-2019, A Graded Approach for Evaluating Radiation Doses to Aquatic and Terrestrial Biota, provides the guidelines for screening methods to estimate radiological doses to aquatic animals and terrestrial plants and animals using site-specific environmental surveillance data. The RESRAD-BIOTA 1.8, Biota Dose Level 2 computer program was used to evaluate compliance with the requirements for protection of biota specified in DOE Order 458.1, Radiation Protection of the Public and the Environment.

In 2024, the terrestrial animal and plant doses were evaluated based on  $0.64 \pm 0.08$  pCi/g of Cs-137 (see Table 6-3) found in soil north of the North Fire Break and East Margin Path, and a Strontium-90 (Sr-90) concentration of 0.77 pCi/L (see Table 5-5) in the surface water collected from the HQ BNL Site Boundary station on-site. The resultant dose to terrestrial animals was calculated to be 0.031 mGy/day, and to plants to be 0.0029 mGy/day. The dose to terrestrial animals was well below the biota dose limit of 1 mGy/day, and the dose to plants was below the limit of 10 mGy/day for terrestrial plants.

To calculate the dose to aquatic and riparian animals in 2024, the surface-water Sr-90 concentration mentioned above, 0.77 pCi/L, was used. A Cs-137 concentration of  $0.35 \pm 0.07$  pCi/g was detected in vegetation between East Saddle and East Margin Paths. Using these concentrations, the calculated estimate of dose to aquatic animals was  $0.214\text{E-}3$  mGy/day, and the dose to riparian animals was  $2.87\text{E-}3$  mGy/day. Therefore, the dose to aquatic animals was well below the limit of 10 mGy/day, and the dose to riparian animals was also well below the 1 mGy/day limit specified by the Order.

## 8.8

### Dose From All Pathways

Table 8-7 summarizes the estimated dose to the MEOSI from the inhalation, immersion, and ingestion pathways, the percentage of the 100-mrem annual allowable dose limit posed by the estimated MEOSI dose by pathway, and the potential cumulative population dose to the surrounding population via the inhalation pathway from the BNL site, all for the years 2020 through 2024. The total dose to the MEOSI from the inhalation and ingestion pathways in 2024 was estimated at 2.28 mrem (22.8  $\mu$ Sv). In comparison, the DOE limit on dose from all pathways is 100 mrem (1 mSv). The cumulative population dose from airborne emissions was 9.8 person-rem ( $9.8\text{E-}2$  person-Sv) in 2024. There is no current regulatory limit on cumulative population dose. However, BNL strives to maintain all doses received ALARA.

In conclusion, the effective dose from all pathways due to BNL operations in 2024 was well below the DOE and EPA regulatory limits, and the ambient off-site TLD dose was within limits of normal background levels seen at the Laboratory site. The potential dose from drinking water was not estimated because most residents adjacent to the BNL site get their drinking water from the Suffolk County Water Authority rather than private wells. To put the potential dose impact into perspective, a comparison was made with estimated doses from other sources of radiation. The average annual dose from all natural background sources and radon in the United States is approximately 310 mrem (3.10 mSv) (from the Ionizing Radiation Dose Range Chart, Department of Energy Office of Public Radiation Protection). A mammogram gives a dose of approximately 250 mrem (2.5 mSv) and a dental x-ray leads to a dose of approximately 70 mrem (0.7 mSv) to an individual. Therefore, a dose of 2.28 mrem from all environmental pathways from BNL is a minute fraction of the dose from that of several routine diagnostic procedures, as well as natural background radiation.

**Table 8-7.** Five-Year Site Dose Summary, (2020-2024).

| Pathway   | 2020           | 2021           | 2022           | 2023           | 2024           |
|---|----------------|----------------|----------------|----------------|----------------|
| Annual Maximally Exposed Off-Site Individual Dose, mrem |                |                |                |                |                |
| <b>Inhalation</b>                                       |                |                |                |                |                |
| Air <sup>1</sup>  | 5.60E-05       | 0.71           | 1.19           | 2.57           | 1.67           |
| <b>Ingestion</b>  |                |                |                |                |                |
| Drinking Water <sup>3</sup>                             | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable |
| Fish <sup>2</sup>                                       | Not Sampled    | Not Sampled    | Not Sampled    | Not Sampled    | Not Sampled    |
| Deer  | 0.913          | 2.9            | 3.82           | 0.35           | 0.61           |
| <b>All Pathways</b>                                     | <b>0.91</b>    | <b>3.61</b>    | <b>5.01</b>    | <b>2.92</b>    | <b>2.28</b>    |

| Pathway                     | Percent of DOE 100-mrem/yr Dose Limit, % |                |                |                |                |
|-----------------------------|--|----------------|----------------|----------------|----------------|
| <b>Inhalation</b>           |  |                |                |                |                |
| Air <sup>1</sup>            | <0.001                                   | <1.0           | <1.5           | <2.6           | <1.7           |
| <b>Ingestion</b>            |  |                |                |                |                |
| Drinking Water <sup>3</sup> | Not Applicable                           | Not Applicable | Not Applicable | Not Applicable | Not Applicable |
| Fish <sup>2</sup>           | Not Sampled                              | Not Sampled    | Not Sampled    | Not Sampled    | Not Sampled    |
| Deer                        | <1.0                                     | <3.0           | <4             | <0.4           | <0.7           |
| <b>All Pathways</b>         | <b>&lt;1.0</b>                           | <b>&lt;4.0</b> | <b>&lt;5.5</b> | <b>&lt;3</b>   | <b>&lt;2.5</b> |

| Pathway                     | Estimated Population Dose Per Year, person-rem |                |                |                |                |
|-----------------------------|--|----------------|----------------|----------------|----------------|
| <b>Inhalation</b>           |  |                |                |                |                |
| Air <sup>1</sup>            | 2.05E-03                                       | 0.773          | 5.6            | 12.5           | 9.8            |
| <b>Ingestion</b>            |  |                |                |                |                |
| Drinking Water <sup>3</sup> | Not Applicable                                 | Not Applicable | Not Applicable | Not Applicable | Not Applicable |
| Fish <sup>2</sup>           | Not Tracked                                    | Not Tracked    | Not Tracked    | Not Tracked    | Not Tracked    |
| Deer                        | Not Tracked                                    | Not Tracked    | Not Tracked    | Not Tracked    | Not Tracked    |
| <b>All Pathways</b>         | <b>2.05E-03</b>                                | <b>0.773</b>   | <b>5.6</b>     | <b>12.5</b>    | <b>9.8</b>     |

Notes:

- 1 - Immersion dose is included in the air dose estimate for inhalation.
- 2 - Source River remained dried up in 2024, so no fish data was available to represent magnitude since sampling was not possible in 2024.
- 3 - The potential dose from drinking water was not estimated because most residents adjacent to the BNL site get their drinking water from the Suffolk County Water Authority rather than private wells.



**References and Bibliography**

40 CFR 61, Subpart H. National Emission Standards for Hazardous Air Pollutants. U.S. Environmental Protection Agency, Washington, DC. December 15, 1989.

ANSI/HPS, 2011. Sampling and Monitoring Releases of Airborne Radioactive Substances from the Stacks and Ducts of Nuclear Facilities. N13.1-2011.

DOE, 2019. A Graded Approach for Evaluation of Radiation Doses to Aquatic and Terrestrial Biota. DOE-STD-1153-2019. U.S. Department of Energy, Washington, DC. February 12, 2019.

DOE, 2025. Radiation Protection of the Public and the Environment. DOE Order 458.1. U.S. Department of Energy, Washington, DC. January 30, 2025.

DOE, 2022. Derived Concentration Technical Standard, DOE-STD-1196-2022. U.S. Department of Energy, Washington, DC. December 2022.

