



**BNL-72172-2004-CP**

***RF Techniques For Improved Luminosity in RHIC***

**J.M. Brennan, M. Blaskiewicz, J. Butler, J. DeLong,  
W. Fischer, T. Hayes**

*Presented at the 9<sup>th</sup> European Particle Accelerator Conference  
Lucerne, Switzerland  
July 5-9, 2004*

July 2004

**Collider-Accelerator Department**

**Brookhaven National Laboratory**

P.O. Box 5000  
Upton, NY 11973-5000  
[www.bnl.gov](http://www.bnl.gov)

*Managed by*  
Brookhaven Science Associates, LLC  
for the United States Department of Energy under  
Contract No. DE-AC02-98CH10886

This is a preprint of a paper intended for publication in a journal or proceedings. Since changes may be made before publication, this preprint is made available with the understanding that it will not be cited or reproduced without the permission of the author.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

### **FOR UNCLASSIFIED, UNLIMITED STI PRODUCTS**

Available electronically at:

#### **OSTI:**

<http://www.osti.gov/bridge>

Available for a processing fee to U.S. Department of Energy and its contractors, in paper from:

U.S. Department of Energy  
Office of Scientific and Technical Information  
P.O. Box 62  
Oak Ridge, TN 37831  
Phone: (865) 576-8401  
Facsimile: (865) 576-5728  
E-mail: [reports@adonis.osti.gov](mailto:reports@adonis.osti.gov)

#### **National Technical Information Service (NTIS):**

Available for sale to the public from:

U.S. Department of Commerce  
National Technical Information Service  
5285 Port Royal Road  
Springfield, VA 22131  
Phone: (800) 553-6847  
Facsimile: (703) 605-6900  
Online ordering: <http://www.ntis.gov/ordering.htm>

## RF TECHNIQUES FOR IMPROVED LUMINOSITY IN RHIC\*

J.M. Brennan, M. Blaskiewicz, J. Butler, J. DeLong, W. Fischer, T. Hayes  
Brookhaven National Laboratory, Upton NY 11973, USA

### Abstract

The luminosity of the Relativistic Heavy Ion Collider has improved significantly [1] over the first three physics runs. A number of special rf techniques have been developed to facilitate higher luminosity. The techniques described herein include: an ultra low-noise rf source for the 197 MHz storage rf system, a frequency shift switch-on technique for transferring bunches from the acceleration to the storage system, synchronizing the rings during the energy ramp (including crossing the transition energy) to avoid incidental collisions, installation of dedicated 200 MHz cavities to provide longitudinal Landau damping on the ramp, and the development of a bunch merging scheme in the Booster to increase the available bunch intensity from the injectors.

### LOW-NOISE RF SOURCE

When the beam is stored in the 197 MHz rf system during physics data taking it is vulnerable to emittance growth driven by either Intra-Beam Scattering or rf noise. The rf buckets are full so that any emittance growth causes debunching which is one of the main determinates of the luminosity lifetime. IBS is inevitable but rf noise can be minimized to a negligible level. A new Direct Digital Synthesizer operating at 197 MHz was built to obtain the lowest possible noise at the rf source.[2] The basic clock is a 300 MHz crystal oscillator (Wenzel). A master DDS generates  $2048F_{rev}$  times the revolution frequency ( $2048F_{rev}=160$  MHz). This clocks a second DDS, which is set to  $472F_{rev}$ . The second alias, which appears at the output frequency plus the clock frequency, is filtered to derive  $2520F_{rev}$ , the operating frequency of the storage system. The clock achieves an average noise floor of better than  $-85$  dBc in a 1 Hz bandwidth at 10 Hz from the carrier, and  $-103$  dBc at 100 Hz. Furthermore, special active filtering techniques are applied to the DC power supplies to reduce narrowband noise lines at harmonics of the mains frequency (60Hz). The synchrotron frequency in the storage system is  $\sim 230$  Hz. With the previous source we have seen problems at 180 Hz. During the store the 28 MHz cavities are left on to capture beam that escapes the 197 MHz bucket, and prevent it drifting into the abort gap. Because the bucket is full we do not see emittance growth, only beam populating the adjacent "satellite" buckets. The signal of trouble at 180 Hz is very narrow lines at this frequency in the high frequency (2.7 GHz) longitudinal Schottky spectrum.

### FREQUENCY-SHIFT REBUCKETING

Rebucketing is a term coined [3] for the process of passing the RHIC bunches from the 28 MHz accelerating system to the 197 MHz storage system. A bunch shortening gymnastic is required because the matched bunch length in the 28 MHz buckets is  $\sim 10$  ns. A jump to the unstable fixed point for bunch stretching and jump back to the stable fixed point for  $3/8$  of a synchrotron period ( $\sim 20$  ms) is used. The gymnastic is time critical and the 197 MHz cavities must switch on abruptly to high voltage in the presence of beam loading. Several steps must be executed; the fundamental mode damper is mechanically removed, the tuning servo moves the mechanical tuner to resonance, the voltage passes through the region of vulnerability to multipactoring, and vacuum in the cavity is perturbed. In previous runs we found that often at least one of the 10 cavities did not switch on successfully.

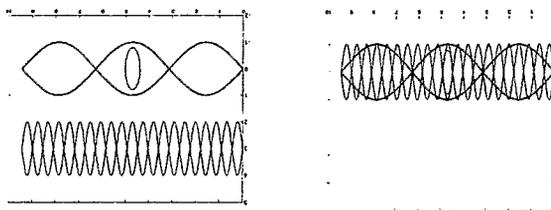


Figure 1. The principle of frequency-shift rebucketing. The frequency of the storage cavities jump to capture the bunch when the bunch length is shortest.

The technique of frequency-shift rebucketing was developed to allow the cavities to turn on slowly without interacting with the beam until the precise moment of the gymnastic. Moreover, if a cavity does not come on then there is opportunity to correct the situation before the gymnastic is executed. The principle is illustrated in figure 1. When the cavities are turned on and brought up to voltage, the drive frequency is offset from the exact harmonic of the revolution frequency. The size of the offset frequency ( $-3$  kHz) is chosen such they do not interact with beam as it is maintained in the buckets of the accelerating system. At the precise moment of the bunch shortening gymnastic the drive frequency of the storage system is jumped to the exact harmonic, and the bunches are captured in the high frequency buckets. Before the jump the relative phase of the two rf systems is changing at the offset frequency. To realize the correct phase at time of the frequency jump a trigger is issued by the low-level circuitry that is synchronized with the beat frequency. This trigger initiates the gymnastic. Figure 2 is a mountain range display of the bunch during the process.

\* Work performed under contract numbers #DE-AC02-98CH10886 and #DE-AC05-00OR2275 with the auspices of the United States Department of Energy

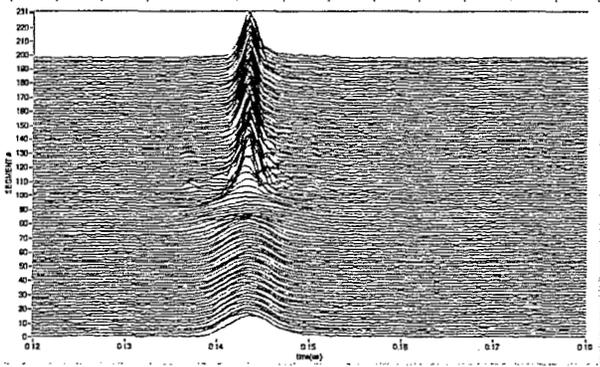


Figure 2. Mountain range display of rebucketing. The horizontal axis is 60 ns full scale. The total time is 100ms.

### Pre-tuning of the tuning servos

To effectively compensate a cavity for beam loading it is tuned with its resonance frequency different from the operating frequency. It is tuned properly when the reactive part of the beam current is completely shunted by the susceptance of the cavity. Two benefits follow: 1. the loading angle of power amplifier is zero (real load), 2. the cavity is tuned on the correct side of the resonance curve for Robinson stability. The sign and magnitude of frequency offset are chosen such that when the cavity is started with the shifted frequency its tuning servo anticipates the proper resonance frequency to compensate the cavity. In figure 3, when the cavity is brought on at the frequency of the dotted line the tuning servo makes it resonant at that frequency and the power amplifier generates  $I_{\text{generator}}$ . When the drive frequency is shifted up to solid line the cavity suddenly feels the beam current. At this frequency the impedance angle is  $63^\circ$  and the vector diagram on the right shows that the cavity is now compensated for the beam loading and the tuning servo and generator current do not change.

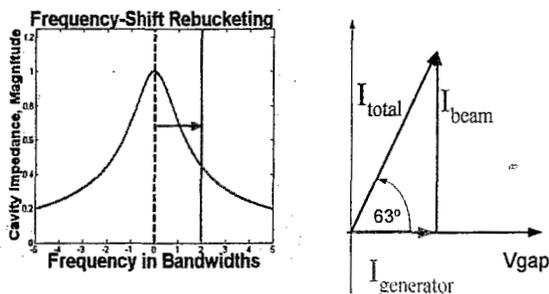


Figure 3. Left, the cavity resonance curve, showing the size and direction of the frequency shift. Right, the beam current and generator current when the cavity is compensated. The drive frequency changes but the cavity resonance frequency does not. It is tuned on the correct side of resonance for beam above transition to obtain Robinson stability.

## LANDAU CAVITIES

RHIC beams have exhibited longitudinal instabilities that have all been of single-bunch in nature. For example, after crossing the transition energy gold bunches develop strong bunch shape oscillations that damp very slowly, if at all. There is no correlation between adjacent bunches. By the end of the energy ramp these oscillations cause unacceptable longitudinal emittance growth. Protons are injected just above transition in RHIC and these instabilities are very pronounced. They have been characterized as solitons [4] and have been observed to persist indefinitely. The instabilities have been prevented by a dedicated Landau damping cavity at 200 MHz in each ring. They function by increasing the synchrotron tune spread within the bunch and enhancing Landau damping.

### Hardware

The cavities are decommissioned Standing Wave Cavities from the SPS, [5] supplied gratis to Brookhaven. The voltage needed for Landau damping is less than 200 kV so the cavities are powered with the 2 kW solid state amplifiers that serve as the tetrode driver for the storage cavities. The cavities have high impedance ( $8 \text{ M}\Omega$ ) since they were designed to produce 1 MV. In this application they operate at much less voltage and furthermore, they must be turned on and off adiabatically. However, since the wavelength at 200 MHz is longer than the bunch length there is no preferred phase relationship between the Landau cavity and the bunches. This enables us to operate the Landau cavities at a harmonic of the revolution frequency that is not a harmonic of the bunch frequency, thus avoiding any beam loading. We use harmonic number 2563, which is not a multiple of any of the bunch patterns used in RHIC. The range of the mechanical tuner allows operation from transition to store energy.

## RING-TO-RING PHASE LOCKING

### Synchronization on the ramp

The rf systems of RHIC's two rings operate independently on the energy ramp. Different rf frequencies cause the beam to drift in and out of collision. The resulting modulation of the beam-beam tune shift compromises the dynamic aperture. To prevent the spurious collisions the two rings are synchronized by detecting the phase difference between the revolution marker clocks, and feeding back to the frequency control of the Yellow ring in a master/slave configuration. The dynamics is similar to the conventional synchronization loop but with the added complication that the rings must pass through the transition energy, where the tolerance to

frequency error vanishes. The feedback equation of the master ring is;

$$\begin{aligned} \delta\omega_{rf} = & k_{\phi} (\phi_{b2b} - \phi_s) \\ & + k_R (R_{beam} - R_{steer}) \\ & + k_{Int} \int (R_{beam} - R_{steer}) dt \end{aligned}$$

While the equation for the slave ring is changed to;

$$\begin{aligned} \delta\omega_{rf} = & k_{\phi} (\phi_{b2b} - \phi_s) \\ & + k_R (R_{beam} - R_{steer}) \\ & + k_{sync} \int (\omega_{yellow} - \omega_{blue}) dt \end{aligned}$$

Where:  $\phi$  is phase (bunch-to-bucket and synchronous),  $\omega$  is frequency (Yellow or Blue rings), and  $R_{steer}$  is the radial steering reference function.

Measuring the relative phase at the revolution frequency accomplishes two things: 1. the natural gain of the synchronization term,  $k_{sync}$ , is low, and 2. a phase error of several rf buckets can accumulate without phase detector ambiguity. As the beam approaches transition the second term gains weight because of the beam response,  $\delta R / R = (\gamma^2 / \gamma_t^2 - \gamma^2) \delta\omega / \omega$ , a temporary frequency difference occurs between the rings as the value of the third term changes.

### Bp loop

The rf frequency is determined by the radial loop. Normally the dynamical value of the position of the average orbit in the arcs is measured by standard RHIC Beam Position Monitors whose signals are split off to dedicated electronic modules. Two BPMs which are separated by  $\frac{1}{2}$  betatron wavelength are averaged to reject closed orbit distortions. The rejection is not 100%, resulting in some variation of  $\sim 40$  Hz in the rf frequency when the beam reaches store energy. To remove this variation an additional correction loop compares the actual rf frequency to a value calculated from the set point for Bp for the dipole magnets and the known circumference of the rings. The value of the rf frequency is sensed, not the beam frequency. The gain of the correction is approximately 0.5 Hz/second.

### BUNCH MERGE IN THE BOOSTER

An rf gymnastic was developed in the AGS Booster to provide gold bunches for RHIC with more than  $10^9$  ions. The intrinsic longitudinal emittance of beam from the Tandem Van de Graaff is very low. In the standard mode the AGS is filled with 24 bunches in four loads from the Booster, then debunched and captured into four RHIC bunches. A new technique was developed to merge the six bunches of the Booster into three before transferring to the AGS. The process takes place on an intermediate

flattop and adds 50 ms to the cycle length. In figure 4 one sees six bunches merging into three and then the harmonic number of the rf system is adiabatically changed (by blending cavities at different frequencies) from three to six, filling only  $\frac{1}{2}$  the ring with bunches. The three bunches are then transferred to the AGS and captured in harmonic 24 buckets. The process is repeated eight times to fill all buckets and the process in the AGS is unchanged. The extra emittance generated in the process is small compared to the growth cause by energy straggling on the stripper foil in the transfer line. The technique produced bunches of  $1.7 \times 10^9$  ions, and in a test, six bunches were injected into RHIC and accelerated.

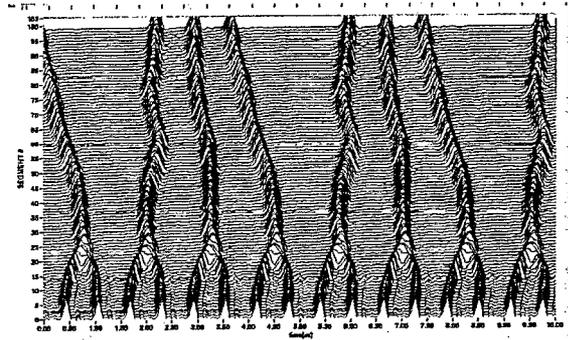


Figure 4. Mountain range of bunch merge and harmonic change in the Booster. Two & 2/3 turns are shown and the total time is 50 ms. Three bunches go to the AGS 8 times.

### ACKNOWLEDGEMENTS

We are grateful to the RF group at the CERN/SPS for providing the Standing Wave Cavities that have contributed to the success the RHIC run. The insights and sage advice of Eugene Raka continue as a resource of the RHIC rf team. The diligence and creativity of the rf technicians of the Collider-Accelerator department have been invaluable for the timely completion of the new systems described herein.

### REFERENCES

- [1] W. Fischer, et al, Luminosity Increases in Gold-gold Operation in RHIC, these proceedings
- [2] T. Hayes, A Low-Noise RF Source for RHIC, these proceedings
- [3] W. Pirkel, CERN, private communication.
- [4] M. Blaskiewicz, J. Wei, A. Luque, and H. Schamel Phys. Rev. ST Accel. Beams 7, 044402 (2003). And M. Blaskiewicz, et al, Longitudinal Solitons in RHIC, 2003 Particle Accelerator Conference, Portland
- [5] P.E. Faugeras, et al, Proceedings of 1987 IEEE Particle Accelerator Conference, Washington DC p.1719.