BROOKHAVEN
NATIONAL LABORATORY

BNL-73444-2005-CP

Synchrotron Radiation in eRHIC Interaction Region

J. Beebe-Wang, C. Montag, et. al.

Presented at the Particle Accelerator Conference (PAC'05)
Knoxville, Tennessee
May 16-20, 2005

Collider-Accelerator Department

Brookhaven National Laboratory
P.O. Box 5000
Upton, NY 11973-5000
www.bnl.gov

Managed *by*
Brookhaven Science Associates, LLC
for the United States Department of Energy under
Contract No. DE-AC02-98CH10886

This is a preprint of a paper intended for publication in a journal or proceedings. Since changes may be made before publication, this preprint is made available with the understanding that it will not be cited or reproduced without the permission of the author.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those *of* the United States Government or any agency thereof.

FOR **UNCLASSIFIED,** UNLIMITED STI PRODUCTS

Available electronically at:

OSTI:

http://www.osti.gov/bridge

Available for a processing fee to U.S. Department of Energy and its contractors, in paper from:

U.S. Department of Energy
Office of Scientific and Technical Information
P.O. Box **62**
Oak Ridge, TN **37831**
Phone: **(865) 576-8401**
Facsimile: **(865) 576-5728**
E-mail: reports@adonis.osti.gov

National Technical Information Service (NTIS):

Available for sale to the public from:

U.S. Department of Commerce
National Technical Information Service
5285 Port Royal Road
Springfield, VA **22131**
Phone: **(800) 553-6847**
Facsimile: **(703) 605-6900**
Online ordering: **http://www.ntis.gov/ordering.htm**

Printed on recycled paper

SYNCHROTRON RADIATION IN ERHIC INTERACTION REGION*

J. Beebe-Wang#, C. Montag, Brookhaven National Laboratory, Upton, *NY* 11973, **USA**

A. Deshpande, Stony Brook University, Stony Brook, *NY* 11974, USA

D. Rondeau, Binghamton University, Binghamton, *NY* 13902, USA

B. Surrow, MIT, Cambridge, MA 02139, USA

Abstract

The electron-ion collider eRHIC [1] currently under study at BNL consists of an electron storage ring added to the existing RHIC complex. The interaction region of this facility has to provide the required low-beta focusing while accommodating the synchrotron radiation generated by beam separation close to the interaction point. In the current design, the synchrotron radiation caused by 10GeV electrons bent by separator dipole magnets will be guided through the interaction region and dumped 5m downstream. However, it is unavoidable to stop a fraction of the photons at the septum where the electron and ion vacuum systems are separated. In order to protect the septum and minimize the backward synchrotron radiation, an absorber and collimation system will be employed. In this paper, we first present the overview of the current design of the eRHIC interaction region with special emphasis on the synchrotron radiation. Then the initial design of the absorber, including its geometrical and physical property, will be described. Finally, our initial investigation of synchrotron radiation in the eRHIC interaction region, especially a simulation of the backward scattering from the absorber, will be presented.

ERHIC INTERACTION REGION

The merging and separation of electron and ion beams in the current design of the eRHIC interaction region is realized by bending the lower-energy electron beam away from the ion beam. This scheme provides a machine-element free region of $\pm$ 3m around the IP and a greater detector acceptance at the expense of lower luminosity and a fair amount of synchrotron radiation generation in the interaction region [2]. **A** certain fraction of the synchrotron radiation fan unavoidably hits the septum plate of the fist ion septum quadrupole, at 7.2m from the interaction point (IP). This septum is therefore equipped with a dedicated synchrotron radiation absorber to minimize the amount of backscattered photons that may eventually hit the detector, thus contributing to IP background. In this paper we present our initial investigation of synchrotron radiation in the eRHIC interaction region, especially a simulation of the backward scattering from the absorber.

***Work** performed under the auspices of the U. **S.** Department of Energy.
#bbwang@bnl.gov

FORWARD SYNCHROTRON RADIATION IN THE INTERACTION REGION

The photon spectrum of forward synchrotron radiation can be calculated with [3]:

$$\frac{d^2n}{dtdE} = \frac{P_0 y}{E_C^{\,2}} \frac{S(\omega/\omega_C)}{(\omega/\omega_C)} \qquad (1)$$

where P_0 is the synchrotron radiation power, γ is the electron relativistic factor E^e_{total} / E^e_{rest}, E_C is the critical photon energy, and the S-function is defined as:

$$S(\frac{\omega}{\omega_C}) = \frac{9\sqrt{3}\omega}{8\pi\,\omega_C} \int_{\omega/\omega_C}^{\infty} K_{5/3}(z)\, dz. \qquad (2)$$

Here, $K_{5/3}(z)$ is the modified Bessel function of the second kind. There are two directions of synchrotron radiation in the eRHIC interaction region: forward (in the direction of the electrons) and backward (in the opposite direction of the electrons). The forward synchrotron radiation background is generated by 10GeV electrons bent through a 0.2Tesla detector integrated dipole magnet located 1m (from the magnet center to IP) upstream. The backward radiation background is caused by the secondary radiation of the absorber located 7.2m downstream, which is proportional to the primary radiation onto the absorber. In the current design, the fraction of the forward radiation fan hitting the absorber is 20% and 27%, generated in the magnets located 1m (from the magnet center to IP) upstream and downstream of the detector, respectively. Figure 1 shows the photon spectrum of forward radiation. into the interaction region without masks and onto the absorber calculated with the physical parameters of eRHIC listed in Table 1. The integrated forward radiation onto the absorber is 4.8×10^{22} photons/sec.

Number of Dipole Magnets at IP	**2**
Magnetic Field	0.2 Tesla
Magnet Effective Length L	1.0 m
Electron Beam Current	0.5 A
Electron Relativistic Factory	1.96E+04
Syncrotron Radiation Power P_0	5.08 kW
Critical Photon Energy E_0	13.3keV

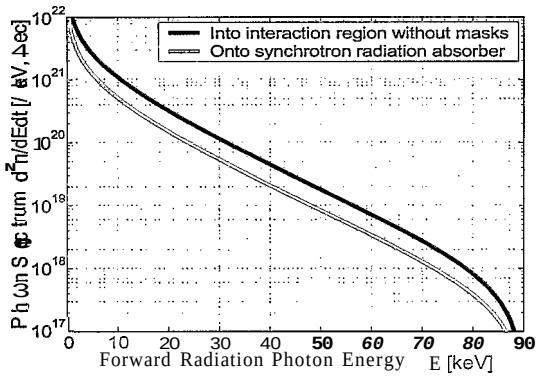

Figure 1: Photon spectrum of forward synchrotron radiation into the interaction region without masks (blue) and onto the synchrotron radiation absorber (red).

DESIGN OF SYNCHROTRON RADIATION ABSORBER

The design of V-shaped absorber is based on the high power synchrotron radiation absorber of HERA [4]. It not only has to withstand the heat load of the synchrotron radiation, but also has to minimize the backward scattering of the photons. Table 2 lists the geometry location and material of the vacuum chamber, the detector and the V-shaped absorber. Figure 2 provides a 3D view of the eRHIC synchrotron radiation absorber placed in front of the septum.

Table 2: Geometry location and material of the absorber, the vacuum chamber, the detector and the IP magnets.

Material of V-shaped Absorber	Copper
Absorber V-opening Width	1 cm
Absorber V-opening Height	3 cm
Absorber V-opening Depth	25 cm
Surface tilt angle of the V-opening	60 mrad
Interaction Point from Absorber	7.2 m
Upstream Magnet from Absorber	8.2 m
Downstream Magnet from Absorber	6.2 m
Material of Vacuum Chamber	Stainless Steel
Diameter of Vacuum Chamber	15 cm
Material of the Detector Surface	Silicon
Diameter of Detector Opening	15 cm

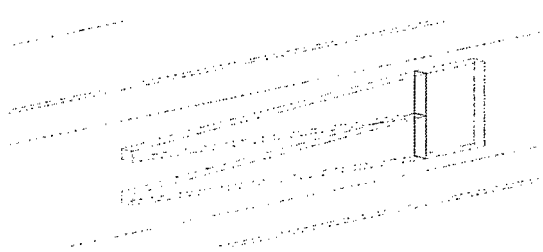

Figure 2: The eRHIC synchrotron radiation absorber.

BACKWARD SYNCHROTRON RADIATION INTO THE IR REGION

Computer Simulations

GEANT [5], a Monte Carlo tool for high-energy physics detector, is used for this simulation study. The included physics processes involving photon-matter interactions are photoelectric effect, Rayleigh (coherent) scattering, Compton (incoherent) scattering, continuous energy loss, (e^+, e^-) pair production, positron annihilation, hadronic interaction, Bremsstrahlung, ionization and δ-ray production. All the simulation parameters are consistent with the current eRHIC design. The result of the simulation, Figure 3, shows a uniform photon distribution across the beam pipe in the interaction region due to backward synchrotron radiation from the absorber. The integrated backward radiation into the detector is 1.2×10^{16} photonslsec and the backward scattering rate is 4×10^{6} to 1.

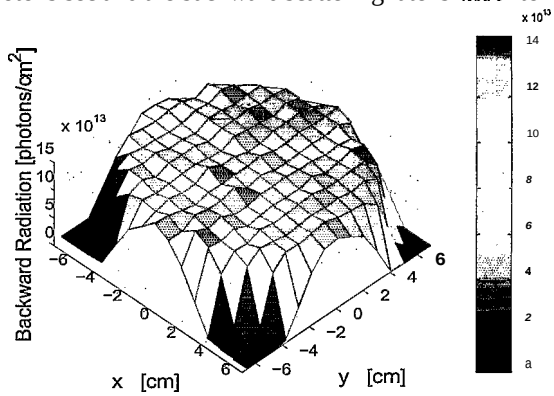

Figure 3: synchrotron radiation photon density distribution in the beam pipe cross section at the detector.

Backward Radiation into Detector Generated from Different Parts of the Absorber Surface

The characteristics of the backward radiation generated from different parts of the absorber surface can be different due to their path and the angle to the detector. We simulated the backward radiation levels associated with different parts of the absorber surface. Figure 4 is a side view of the fraction of forward radiation photons onto the absorber hitting the top 5% of the V-shaped surface. The resulting backward radiation, figure 5, has higher photon density at the bottom of the detector opening compared to the top. The backward radiation level is 10% more than the radiation level averaged over the entire absorber surface.

A similar photon density distribution is obtained from the simulation of 5% forward radiation fan onto the upper-middle part of the absorber surface. The backward radiation level is 10% less than the radiation level averaged over the entire absorber surface. Figure **6** shows the photon spectrum of backward radiation associated with top and middle parts of the absorber surface compared to the spectrum averaged over the entire

absorber surface. It is interesting to note that the summation of the backward radiation photon density from the top-bottom symmetric parts of the V-shaped absorber is very uniform at the detector.

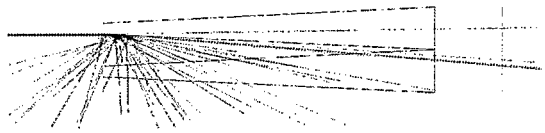

Figure 4: side view of 5% forward radiation fan onto the top part of the absorber surface.

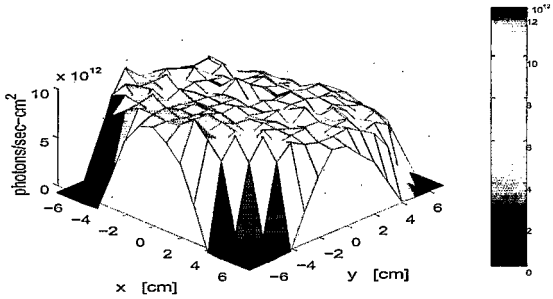

Figure 5: Photon density of backward radiation into detector from the top part (5%) of the absorber surface.

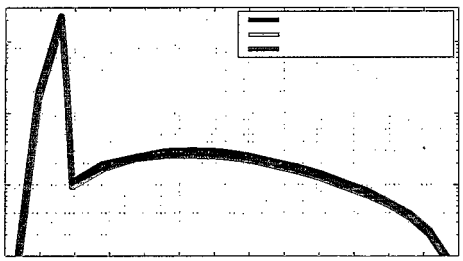

Figure 6: The photon spectrum of backward radiation associated with top and middle parts of the absorber surface compared to the average of the entire surface.

Radiation Level vs. Absorber Length

The backward radiation level crucially depends on the material and the tilt angle of the V-shaped absorber surface with respect to the direction of forward radiation. In order to investigate the impact on the surface tilt angle to the backward radiation into the detector, a simulation was also performed with a lOcm absorber depth keeping all other physical and geometrical parameters the same. Figure 7 compares the photon spectrum of backward radiation into the detector from the V-shaped absorbers with depths of lOcm and 25cm. Their corresponding surface tilt angles are 150mrad and 60mrad, respectively. The integrated backward radiation levels into the detector are 7.0×10^{16}photons/sec and 1.2×10^{16}photons/sec for the absorber depth of lOcm and 25 cm, respectively.

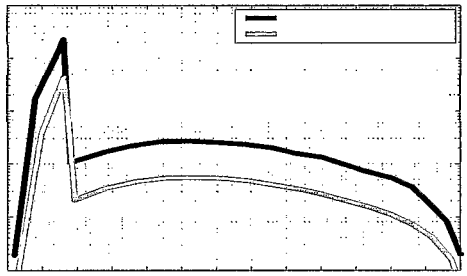

Figure 7: comparison of photon spectrums of backward synchrotron radiation into the detector from the v-shaped absorbers with depths of lOcm and 25cm.

Discussion and Conclusion

With the current Interaction design of eRHIC, the integrated forward synchrotron radiation onto absorber is 4.8×10^{22}photons/sec, and the integrated backward radiation into the detector is 1.2×10^{16}photons/sec. Thus the backward scattering rate is 4×10^{6}:1 for an copper absorber with 25cm depth. A synchrotron radiation mask system needs be designed to limit the opening angle of the backward radiation fan such that the detector components are shadowed from the core of the backward radiation fan.

The simulation study shows that the photon density distribution of backward radiation is very uniform across the detector beam pipe. Most backward radiation photons into the detector have very low energy (<10keV).

The radiation deviation due to different parts of the V-shaped absorber is within 10% of the average radiation level. The summation of the backward radiation from the top-bottom symmetric parts of the V-shaped absorber is also uniform across the detector beam pipe.

The integrated backward radiation levels into the detector are 7.0×10^{16}photons/sec and 1.2×10^{16}photons/sec for the absorber depth of lOcm and 25cm, respectively. The knowledge of backward radiation level vs. the absorber depth provides useful guidelines for more detailed design.

Apart from the backward radiation properties, an investigation on the heat load and temperature distribution on the eRHIC absorber due to synchrotron radiation will also be necessary.

REFERENCES

[1] "eRHIC Zeroth-Order Design Report", BNL, Tech Note C-A/AP/142, 2004.

[2] C. Montag ***et** al*, "Interaction Region Design for the Electron-Ion Collider eRHIC", these proceedings.

[3] A. Hofmann, "Characteristics of Synchrotron Radiation", Proc. CERN Acc. School, CERN 98-04.

[4] M. Bieler *et al*, "Design of a High Power Synchrotron Radiation Absorber for HERA", Proc. of PAC 1999.

[5] "'GEANT, Detector Description and Simulation Tool", CERN Program Library Long Writeup W5013, 1994.