

LHC beam-beam compensation studies at RHIC

**W. Fischer, Y. Luo, N. Abreu, R. DeMaria, R. Calaga,
C. Montag, G. Robert-Demolaize**
Brookhaven National Laboratory, Upton, NY, USA

H.J. Kim, T. Sen
Fermi National Accelerator Laboratory, Batavia, IL, USA

Presented at the Particle Accelerator Conference (PAC09)
Vancouver, B.C., Canada
May 4-8, 2009

Collider-Accelerator Department

Brookhaven National Laboratory
P.O. Box 5000
Upton, NY 11973-5000
www.bnl.gov

Notice: This manuscript has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy. The publisher by accepting the manuscript for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this manuscript, or allow others to do so, for United States Government purposes.

This preprint is intended for publication in a journal or proceedings. Since changes may be made before publication, it may not be cited or reproduced without the author's permission.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

LHC BEAM-BEAM COMPENSATION STUDIES AT RHIC*

W. Fischer[†], Y. Luo, N. Abreu, R. DeMaria, R. Calaga, C. Montag,
G. Robert-Demolaize BNL, Upton, NY, USA
H.J. Kim, T. Sen, FNAL, Batavia, IL, USA

Abstract

Long-range and head-on beam-beam effects are expected to limit the LHC performance with design parameters. To mitigate long-range effects current carrying wires parallel to the beam were proposed. Two such wires are installed in RHIC where they allow studying the effect of strong long-range beam-beam effects, as well as the compensation of a single long-range interaction. The tests provide benchmark data for simulations and analytical treatments. To reduce the head-on beam-beam effect electron lenses were proposed for both the LHC and RHIC. We present the experimental long-range beam-beam program and report on head-on compensations studies at RHIC, which are based on simulations.

INTRODUCTION

Beam-beam effects are expected to limit the performance of the LHC [1–4]. Incoherent, PACMAN, or coherent effects can be caused by both head-on and long-range interactions. Head-on effects are important in all colliders and total beam-beam tune shifts as large as 0.028 were achieved in the Sp̄pS [5] and Tevatron [6]. Long-range effects, however, differ in previous and existing colliders.

Figure 1 shows the basic layout of the beam-beam interaction and compensation studies in RHIC. At store there are nominally 2 head-on interactions, in IP6 and IP8, and long-range interactions with at least 15σ separation in the other IPs. 3 Yellow bunches couple to 3 Blue bunches. For studies a DC wire was installed in each ring in IR6. 2 electron lenses will be installed near IP10. Tab. 1 shows the main parameters for polarized protons.

In the LHC there are 30 long-range beam-beam interactions localized in each of 4 interaction regions [3]. Locations in warm sections of the interactions are reserved to accommodate long-range beam-beam wire compensators (Fig. 2), or electron lenses. These locations have about equal horizontal and vertical β -functions.

The two main LHC luminosity upgrade scenarios are an early separation (ES) and a large Piwinski angle (LPA) scheme [4]. In the ES scheme the number of long-range interactions is reduced to 4 per IP, at 4–5 σ . The LPA scheme maintains the small crossing angle, with long bunches with up to 4×10^{11} protons. The LPA scheme would benefit from both long-range and head-on compensation.

The performance limitation imposed by beam-beam effects may be ameliorated by compensation techniques. Because of the amplitude dependence of the beam-beam

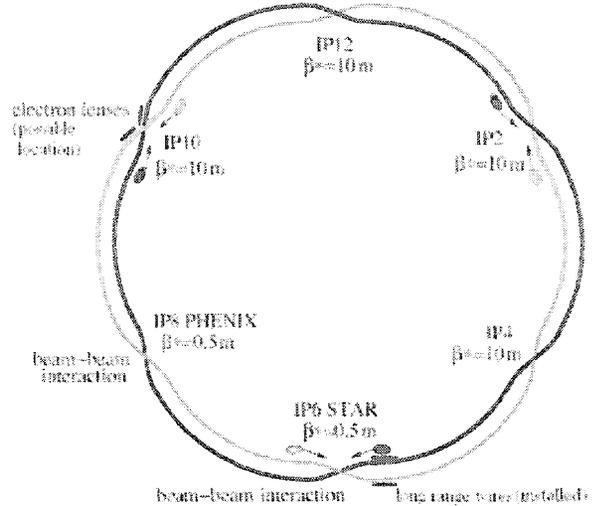


Figure 1: Beam-beam interactions in RHIC and locations of wires and electron lenses. The shown β^* values are for the polarized proton design configuration at 250 GeV, which has not been implemented yet.

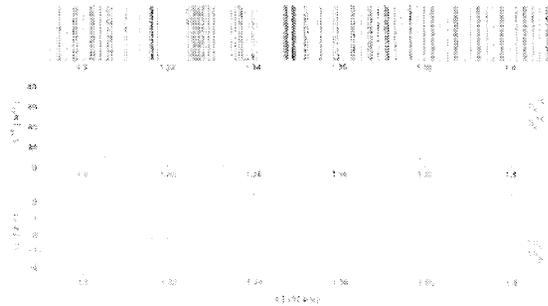


Figure 2: LHC IR lattice functions. At $s = 13.433$ km, with approximately equal transverse β -functions, a long-range wire compensator or electron lens could be placed.

forces a proper head-on compensation cannot be done with magnets but requires another particle beam. The compensation of head-on beam-beam effects was first tested in the 4-beam e^+e^- collider DCI. The DCI experience however fell short of expectation because of strong coherent effects [7]. Head-on beam-beam compensation was proposed for the SSC [8], Tevatron [9], and early on the LHC [10].

The compensation of long-range effects in the Tevatron was proposed with electron lenses [9], and in the LHC with wires [11]. A partial long-range beam-beam compensation was successfully implemented in the e^+e^- collider DAΦNE [12].

* Work supported by US DOE under contract DE-AC02-98CH10886.

[†] Wolfram.Fischer@bnl.gov

Table 1: Main RHIC parameters relevant for beam-beam effects, for polarized protons. Note that the polarized proton bunch intensity is also limited by intensity dependent depolarization effects in the AGS.

quantity	unit	achieved	goal
beam energy E	GeV	250	250
bunch intensity N_b	10^{11}	1.1	2.0
rms emittance ϵ	mm mrad	1.85	3.3
rms bunch length	m	0.7	0.30
beam-beam parameter ξ/IP	...	0.0078	0.0074
no of IPs	...	2	2
β^* at IP6, IP8	m	0.7	0.5
$(\Delta\psi_x, \Delta\psi_y)_{IP6-IP10}$	π	(19.1, 19.6)	
$(\Delta\psi_x, \Delta\psi_y)_{IP8-IP10}$	π	(8.4, 10.9)	

This article is an abridged and updated version of Ref. [13].

LONG-RANGE BEAM-BEAM COMPENSATION STUDIES

To investigate strong long-range interactions, test compensation schemes, and benchmark simulations, experimental data are needed. In the SPS wires were installed for this purpose [14–17]. The wire experiments in RHIC complement these studies. The beam lifetime in RHIC is typical for a collider and better than in the SPS wire experiments. In addition, head-on effects can be included, and with properly placed long-range interactions and wires, the compensation of a single long-range interaction is possible.

Wires in RHIC

The wire parameters are shown in Tab. 2 [18]

Location in the ring. For a successful compensation the phase advance between the long-range interaction and the compensator should be no larger than about 10 degrees [19]. It is possible to place a wire after Q3 to compensate for a vertical long-range beam-beam interaction near the DX magnet (Fig. 3). In the Blue ring the wire is installed above the beam axis, in the Yellow ring below the beam axis (see Fig. 4).

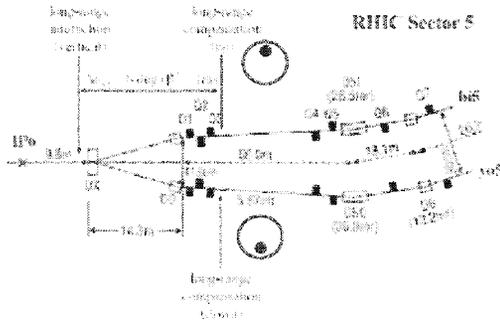


Figure 3: Location of wires in RHIC and location of long-range beam-beam interaction for compensation.

Integrated strength. To compensate a single long-range interaction, the compensator's integrated strength (IL)

Table 2: Parameters for RHIC wires. The wire material is Cu at 20°C. The nominal wire strength is for a single long-range interaction with a proton bunch intensity of 2×10^{11} .

quantity	unit	value
strength (IL), nominal	A m	9.6
max. strength $(IL)_{max}$	A m	125
length of wire L	m	2.5
radius of wire r	mm	3.5
number of heat sinks n	...	3
electrical resistivity ρ_e	Ω m	1.72×10^{-8}
heat conductivity λ	$W m^{-1} K^{-1}$	384
thermal expansion coeff.	K^{-1}	1.68×10^{-5}
radius of existing pipe r_p	mm	60
current I , nominal	A	3.8
max. current in wire I_{max}	A	50
current ripple $\Delta I/I$ (at 50 A)	10^{-4}	< 1.7
electric resistance R	m Ω	1.12
max. voltage U_{max}	mV	55.9
max. power P_{max}	W	2.8
max. temp. change ΔT_{max}	K	15
max. length change ΔL_{max}	mm	0.4
vertical position range	mm/ σ_y	65/10.6

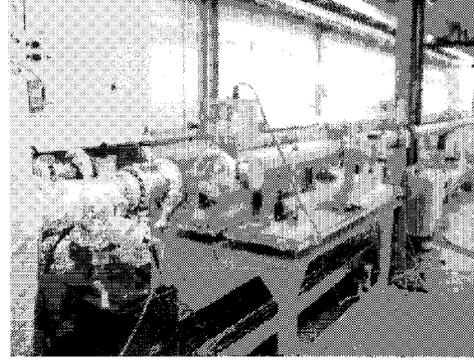


Figure 4: The two long-range beam-beam wires in the RHIC tunnel during installation.

must be the same as the opposing bunch's current integrated over its length (IL) = $N_b e c L$, where I is the current in the wire, L its length, N_b the bunch intensity, e the elementary charge, and c the speed of light (see Tab. 2).

In the LHC, (IL) = 80 A m is required for the 16 long-range interactions on either side of an IR [11]. Such a strength is also expected to lead to enhanced diffusion at amplitudes larger than 6σ [19]. To study the enhanced diffusion, the RHIC wire is designed for $(IL)_{max} = 125$ A m.

Wire temperature. The wire's temperature should not exceed 100°C. We use $n = 3$ heat sinks cooled with forced air, spaced apart by $L/(n-1)$. The maximum temperature increase in the center between 2 heat sinks is

$$\Delta T_{max} = \frac{1}{8\pi^2} \frac{\rho_e}{\lambda} \frac{(IL)^2}{(n-1)^2 r^4}, \quad (1)$$

where ρ_e is the electrical resistivity, λ the heat conductivity, and r the wire radius. To move the wire compensator close to the beam, its radius should not be much larger than an rms transverse beam size. We have $\Delta T_{max} \leq 15$ K.

Table 3: Au beam parameters for long-range experiments.

quantity	unit	Blue	Yellow
beam energy E	GeV/n		100
rigidity ($B\rho$)	Tm		831.8
number of bunches	...		23
distance IP6 to wire center	m		40.92
β_x at wire location	m	1091	350
β_y at wire location	m	378	1067

Power supply requirements. To limit emittance growth, a current ripple of $\Delta I/I < 10^{-4}$ is required [19]. $\Delta I/I < 1.7 \times 10^{-4}$ was measured, where the upper limit is given by the noise floor of the measurement.

Experiments and simulations

The main observable in the long-range experiments is the beam lifetime, which is observed as a function of the long-range strength (or wire current), the distance between beam and the wire (or other beam), tune and chromaticity.

Long-range experiments were done with 2 proton beams at injection, 2 proton beams at store, gold beams and wires at store, and deuteron beams and wires at store. No proton beams were available for store experiments with wires yet. Experiments including the head-on effect as well as the compensation of a single long-range interaction are best done with protons since the largest beam-beam parameters can be attained with protons. Observed orbit and tune changes agree with calculations under well controlled experimental circumstances [20, 21].

Most of the the wire experiments so far were done with gold beams (Tab. 3). Figure 5 shows a typical parameter scan, however with deuterons. First the wire current is set, then the distance to the beam is reduced. At close distance, the current is decreased, and again increased.

It was speculated that the beam lifetime τ can be expressed as $\tau = Ad^p$ where A is an amplitude, d the dis-

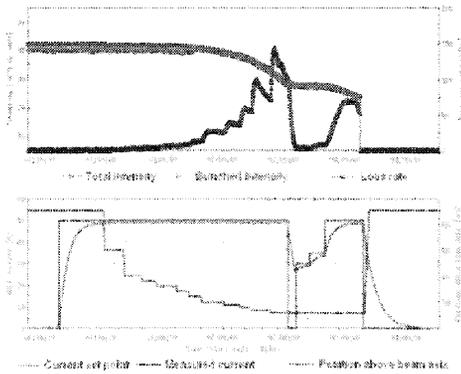


Figure 5: Long-range beam-beam experiment in RHIC with deuterons at store. The upper plot shows the total and bunched beam intensity (blue curves) and the calculated beam loss rate (black curve). The lower plot shows the set point for the wire current (black curve), the measured current (red curve), and the wire position above the beam pipe center (blue curve).

tance between wire and beam, and p an exponent. For the SPS p had been found to be about 5, and for the Tevatron to be about 3 [22]. The fitted exponents in all RHIC measurements range from 1.7 to 16, i.e. p is not constrained within a narrow range. 10 of the 13 obtained p values are between 4 and 10. Fig. 6 shows the fitted exponents p as a function of the ion tunes in the upper part, and the proton tunes in the lower part. Ion tunes near the diagonal and away from either horizontal or vertical resonances show smaller exponents p . The experiments also showed that the beam lifetime is reduced with increased chromaticity [20].

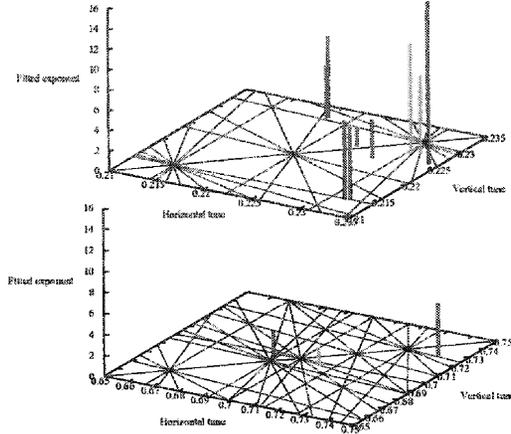


Figure 6: Fitted exponents p for long-range beam-beam experiments as a function of the ion tunes (top) and the proton tunes (bottom). The fitted exponents range from 1.7 to 16.

Another simple measure of assessing the long-range beam-beam effect in experiments is to measure the distance between the beam and wire (or other beam) at which the beam lifetime become smaller than a certain value, for example 20 h. An amplitude range between 3.5 and 17 σ is observed in RHIC with no clear correlation between this distance and the fitted coefficient p . In 2 cases the distance was found to be as large as or larger than 10 σ , and most cases fall between 4 and 10 σ . Operation with less than 5 σ separation appears to be difficult [23].

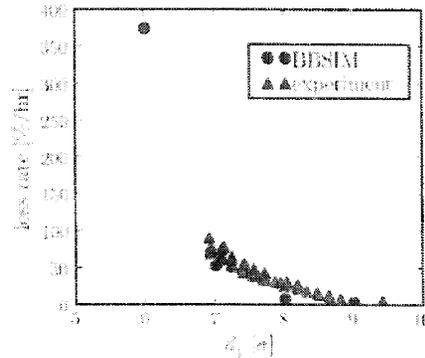


Figure 7: Comparison of measured and simulated beam loss rate as a function of distance between wire and beam. Experiment with gold beam at store, wire strength of 125 A m [24].

One important goal of the experiments is to benchmark simulations. In several simulations the onset of large losses as a function of the distance between wire and beam was reproduced within about 1σ [17, 21, 24, 25]. One such comparison is shown in Fig. 7.

HEAD-ON BEAM-BEAM COMPENSATION STUDIES

If a collision of a proton beam with another proton beam is followed by a collision with an electron beam, the head-on beam-beam effect can be canceled exactly if the following 3 conditions are met:

1. The proton and the electron beam produce the same amplitude dependent force.
2. The phase advance between the two beam-beam collisions is a multiple of π in both transverse planes.
3. There are no nonlinearities between the two collisions.

In practice this cannot be achieved, and the goal of the simulation studies is to find out how far one can deviate from these three condition. With tolerances established one can then assess if these can be achieved with the technology available.

Electron lenses in RHIC

Two electron lenses are currently installed in the Tevatron [26] where they are reliably used as an operational gap cleaner [27]. They were also shown to improve the lifetime of antiproton bunches suffering from PACMAN effects [28]. The experience with the construction and operation of the Tevatron electron lenses provides invaluable input into an assessment of the practicability of head-on beam-beam compensation. In RHIC it is planned to install 2 electron lenses near IP10 with parameters close to those of the Tevatron. (Fig. 1, Tab. 4). A successful demonstration of head-on beam-beam compensation in RHIC would also allow to use this technique in the LHC.

Simulation studies

A number of simplifications are used for the simulations so far. First, the electron lenses are exactly at IP10, while 2 lenses for both beams would need to be installed with a few meters offset from the IP. Second, the electron beam of the electron lens is infinitely stiff (see Refs. [30, 31] for a discussion). Third, a lattice for polarized proton operation at 250 GeV is used with $\beta^* = 0.5$ m in IP6 and IP8, and $\beta^* = 10$ m in all other IPs (see Fig. 1 and Tab. 1).

Table 4: Parameters for RHIC electron lenses [29], adapted from the Tevatron electron lenses [26].

quantity	unit	value
electron kinetic energy K_e	keV	5.0
electron speed $\beta_e c$...	$0.14c$
electron transverse rms size	mm	0.57
effective length L_{elens}	m	2.0
<i>full head-on compensation</i>		
no of electron in lens N_e	10^{11}	3.5
electron beam current I_e	A	1.2

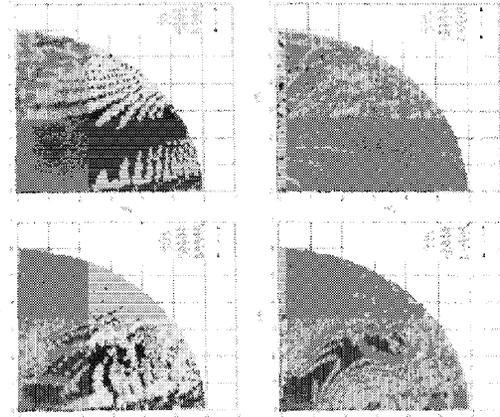


Figure 8: Tune diffusion without beam-beam interaction (top left), with beam-beam interaction (top right), with half (bottom left), and with full beam-beam compensation [32].

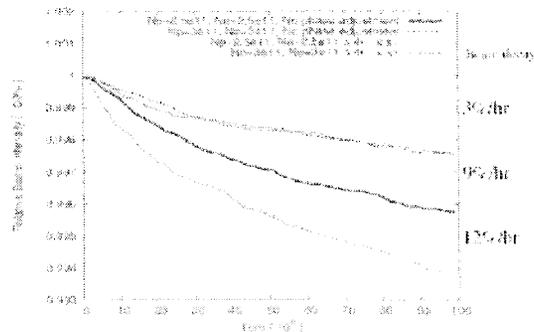


Figure 9: Beam lifetime simulations for increased bunch intensity and different phase advances between the IP and e-lens. Note that without compensation the beam-beam tune generated tune spread could not be accommodated for these bunch intensities.

The phase advance in the horizontal plane between IP6 and IP10 is close to a multiple of π , as well as in the vertical plane between IP8 and IP10. No optimization of the phase advance was done in this lattice.

Tune footprints can be compressed with electron lenses but this is not sufficient to improve the beam lifetime. At large compensation strength the tune footprints are folded over which leads to reduced stability. The folding can be avoided with a partial compensation.

It was found that almost all particles are chaotic with and without compensation [34], and that therefore chaotic borders cannot be used to evaluate head-on problems. Dynamic aperture calculations proved insensitive since they evaluate the stability of motion at large betatron amplitudes, where the beam-beam forces are small.

Other short-term measures calculated were tune diffusion (Fig. 8) and Lyapunov exponent maps [32], and diffusion coefficients sampled at a number of locations in phase space and fitted with an analytic function [34]. In all cases we find that the stability of motion is increased at amplitudes below 3σ and decreased at amplitudes above 4σ .

In many-particle simulations over a large number of turns with SixTrack the emittance growth was too noisy to distinguish cases. To distinguish cases with beam lifetime simulations more than a million turns are necessary. Figure 9 shows a parameter scan with and increased bunch intensity that could otherwise not be accommodated.

SUMMARY

Long-range beam-beam experiments were carried out in RHIC with 2 DC wires parallel to the beam. These experiments complement experiments in the SPS. The RHIC wires can create strong localized long-range beam-beam effects, comparable in strength expected in the LHC, with a beam that has a lifetime typical of hadron colliders and possibly including head-on beam-beam collisions.

The RHIC experiments confirmed that a visible effect of long-range beam-beam interactions should be expected, although their effect sensitively depends on a number of beam parameters such as the tune and chromaticity. Fitting the beam lifetime τ to an exponential function $\tau \propto d^p$ as a function of the distance d between the beam and the wire, exponents p in the range between 1.7 and 16 were found. The experimentally observed distance from the wire to the beam at which large beam losses set in could be reproduced in simulations within 1σ . Distances smaller than 5σ appear to be problematic to maintain good beam lifetime.

Long-range wire experiments with protons, and including the head-on effect, are still outstanding.

In simulations for head-on beam-beam compensation in RHIC, short-term measures such as diffusion maps, Lyapunov exponent maps and action diffusion coefficients all show an increase of the stability for betatron amplitudes below 3σ , and a reduction of stability for amplitudes larger than 4σ . This is particularly pronounced for full head-on compensation and suggests to use partial compensation only. For full compensation the tune footprints are already folded over at small amplitudes.

In operation there are only few particles beyond 4σ , and whether the decreased stability at these amplitudes can be tolerated can be estimated in beam lifetime and emittance growth simulations over up to 10^7 turns with 10^4 macroparticles.

Long-term beam lifetime simulations confirm that the head-on effect should be compensated only partially, enough to obtain a small enough tune footprint with an increased beam-beam parameter, but not more.

ACKNOWLEDGMENTS

For discussions and help we are most thankful to collaborators within the US LHC Accelerator Research Program as well a several people at BNL and a number of other laboratories. Among these are Y. Alexahin, E. Beebe, J. Beebe-Wang, O. Brüning, U. Dorda, W. Herr, A. Kabel, V. Kamerdzhev, J.-P. Koutchouk, E. McIntosh, C. Milardi, K. Ohmi, M. Okamura, A. Pikin, T. Pieloni, J. Qiang, F. Schmidt, V. Shiltsev, G. Sterbini, S. Tepikian, A. Valishev, and F. Zimmermann.

REFERENCES

- [1] J. Gareyte, LHC'99, CERN-SL-99-039 AP, pp. 28-32 (1999).
- [2] W. Herr, EPAC'00, pp. 1630-1632 (2000).
- [3] O. Brüning et al. (editors) CERN-2004-003 (2004).
- [4] F. Zimmermann, PAC'07, pp. 714-718 (2007).
- [5] K. Cornelis, LHC'99, CERN-SL-99-039 AP (1999).
- [6] A. Valishev, EPAC'08, pp. 2937-2941 (2008).
- [7] M. Bergher et al., PAC'79, pp. 3559-3561 (1979).
- [8] E. Tsyganov et al., SSCL-PREPRINT-519 (1993).
- [9] V. Shiltsev et al., Phys. Rev. ST Accel. Beams 2, 071001 (1999).
- [10] E.N. Tsyganov, A. Taratin, and A.I. Zinchenko, CERN SL-Note-95-116-AP (1995).
- [11] J.-P. Koutchouk, PAC'01, pp. 1681-1683 (2004).
- [12] C. Milardi et al., EPAC'06, pp. 2808-2810 (2006).
- [13] W. Fischer et al., in CARE-HHH Workshop 2008 - Scenarios for the LHC upgrade and FAIR, to be published as CERN Yellow report (2009).
- [14] J.-P. Koutchouk, J. Wenniger, and F. Zimmermann, EPAC'04, pp. 1936-1938 (2004).
- [15] F. Zimmermann et al., PAC'05, pp. 686-688 (2005).
- [16] U. Dorda et al., EPAC'08, pp. 3176-3178 (2008).
- [17] U. Dorda, PhD thesis, Vienna University of Technology, Austria (2008).
- [18] W. Fischer et al., EPAC'06, pp. 2158-2160 (2006).
- [19] F. Zimmermann, Beam-Beam Workshop at Fermilab, FERMILAB-Conf-01/390-T, CERN LHC Project Report 502 (2001)
- [20] W. Fischer et al., PAC'07, pp. 1859-1861 (2007).
- [21] H.J. Kim and T. Sen, PAC'07, pp. 3492-3494 (2007).
- [22] F. Zimmermann, private communication.
- [23] N. Abreu, BEAM'07, CERN-2008-005, CARE-Conf-08-004-HHH (2008)
- [24] H.J. Kim et al., Phys. Rev. ST Accel. Beams 12, 031001 (2009).
- [25] A. Kabel, private communication.
- [26] V. Shiltsev et al., Phys. Rev. ST Accel. Beams 11, 103501 (2008).
- [27] X.-L. Zhang et al., Phys. Rev. ST Accel. Beams 11, 051002 (2008).
- [28] V. Shiltsev et al., Phys. Rev. Lett. 99, 244801 (2007).
- [29] Y. Luo and W. Fischer, informal note BNL C-A/AP/286 (2007).
- [30] V. Shiltsev and A. Zinchenko, Phys. Rev. ST Accel. Beams 1, 064001 (1998).
- [31] A. Burov, V. Danilov, and V. Shiltsev, Phys. Rev. E 59, 3605 (1999).
- [32] Y. Luo, W. Fischer, and N. Abreu, BNL C-A/AP/310 (2008).
- [33] Y. Luo et al., EPAC'08, pp. 328-330 (2008).
- [34] N.P. Abreu et al., EPAC'08, pp. 2521-2523 (2008).
- [35] Y. Luo, G. Robert-Demolaize, N. Abreu, and W. Fischer, EPAC'08, pp. 3125-3127 (2008).
- [36] U. Dorda, F. Caspers, T. Kroyer, and F. Zimmermann, proceedings EPAC'08, pp. 3173-3175 (2008).
- [37] U. Dorda and F. Zimmermann, proceedings EPAC'08, pp. 2245-2247 (2006).
- [38] J. Qiang, W. Fischer, and Tanaji Sen, proceedings PAC'07, pp. 3979-3981 (2007).
- [39] V. Shiltsev et al., proceedings PAC'05, pp. 2083-2085 (2005).