BNL-90821-2010-CP

Simulation of the LHC BRAN luminosity monitor for high luminosity interaction regions

R. Miyamoto
Brookhaven National Laboratory Upton, NY, USA

H. S. Matis, A. Ratti, J. Stiller, W.C. Turner
Lawrence Berkeley National Lab, Berkeley, CA, USA

S.M. White
CERN, Geneva, Switzerland

Presented at the First International Particle Accelerator Conference (IPAC'10)
Kyoto, Japan
May 23-28, 2010

Collider-Accelerator Department

Brookhaven National Laboratory
P.O. Box 5000
Upton, NY 11973-5000
www.bnl.gov

Notice: This manuscript has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy. The publisher by accepting the manuscript for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this manuscript, or allow others to do so, for United States Government purposes.

This preprint is intended for publication in a journal or proceedings. Since changes may be made before publication, it may not be cited or reproduced without the author's permission.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Printed on recycled paper

Simulation of the LHC BRAN Luminosity Monitor for High Luminosity Interaction Regions*

R. Miyamoto†, BNL, Upton, NY, USA
H. S. Matis, A. Ratti, J. Stiller‡, W. C. Turner, LBNL, Berkeley, California, USA
S. M. White, CERN, Geneva, Switzerland

Abstract

The BRAN (Beam RAte of Neutrals) detector monitors the collision rates in the high luminosity interaction regions of LHC (ATLAS and CMS). This Argon gas ionization detector measures the forward neutral particles from collisions at the interaction point. To predict and improve the understanding of the detector's performance, we produced a detailed model of the detector and its surroundings in Fluka. In this paper, we present the model and results of our simulations including the detectors estimated response to interactions for beam energies of 3.5, 5, and 7 TeV.

INTRODUCTION

The Large Hadron Collider (LHC) at CERN can accelerate proton beams to 7 TeV and produce proton-proton (*pp*) collisions with a 14 TeV center of mass energy. Luminosity measures performance of the LHC and is particularly important for experiments in high luminosity ($\leq 10^{34}$) interaction regions (IRs), ATRAS (IR1) and CMS (IR5). Detectors of radiation hard Argon gas ionization chambers have been build and installed in both sides of these IRs to monitor and optimize the collision rates [1, 2, 3, 4].

Figure 1 is a schematic layout of one side of a high luminosity IR. A neutral particle absorber (TAN) protects the D2 dipole from forward neutral particles produced in the *pp* collisions [5]. These neutral particles produce (hadronic/electromagnetic) showers inside the TAN with a rate proportional to the *pp* collision rate. Our luminosity detector inside the TAN detects these showers and monitors relative changes in the *pp* collision rate.

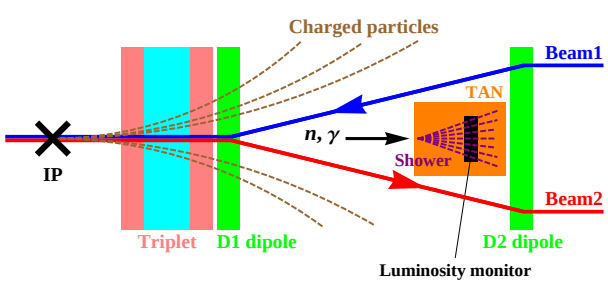

Figure 1: Schematic layout of one side of a high luminosity IR. The detector inside the TAN monitors showers produced by forward neutral particles from the *pp* collisions.

Our detectors can make bunch-by-bunch measurements of 1) the rate that the shower is produced in the TAN (*normal event*) 2) the rate that the showers are produced simultaneously in both sides of the TANs (*coincidence event*), and 3) the average magnitude of the showers. For the nominal 7 TeV beams of the LHC, *pp* collisions per bunch crossing (*multiplicity*) go up to 30, assuming inelastic *pp* cross section is 100 mb. In such a condition, both the normal and coincidence rates saturate to the bunch crossing rate and become insensitive to the *pp* collision rate, and we must use the average signal. Hence, numerical studies of the detector in the past focused on estimating the average signal from the 7 TeV beams [6, 7]. For the 3.5 TeV beams in 2010 and 2011 [8], however, the multiplicity does not exceed two and measurements of the either rates are effective for the luminosity monitoring. Therefore, we did simulations to study performances of our detector in the modes of counting those rates for conditions of the different beam energies. In the following sections, we describe our simulation model and discuss results of the simulations.

MODEL DESCRIPTION

Our simulation model consists of three steps:

1. DPMJET3 [9] simulates particle productions due to the *pp* collisions. We do not consider the crossing angle and spatial and energy distributions of the beams.
2. The produced particles are transported to the TAN surface by EPICS [10]. Our model includes interactions between the particles and the beam pipe and the D1 dipole field but not the triplet fields.
3. Fluka [11] simulates the shower inside the TAN produced by the particles of Step 2. It then calculates the energy deposition in our detector due to the shower.

Data of Steps 1 and 2 were provided by the LHCf collaboration [12], whose detectors are also inside the TANs at IR1. Figure 2 is a result of Step 2 and shows the energy flux of the particles incident on the TAN surface, normalized to per *pp* collision. The flux is dominated by neutrons and gammas produced in the *pp* collisions. Contributions of the particles originated from the beam pipe is small. We may see that the energy flux from 3.5 TeV beams is about one third of that from the 7 TeV beams. This indicates that, even though the detector is designed for the 7 TeV beams, it should see some signal from the 3.5 TeV beams as well.

Figure 3 shows a Fluka simulation of the average energy deposition in the TAN due to the shower. Fluka can also

*This work partially supported by the US Department of Energy through the US LHC Accelerator Research Program (LARP).
† miyamoto@bnl.gov
‡ Currently at Heidelberg University, Heidelberg, Germany.

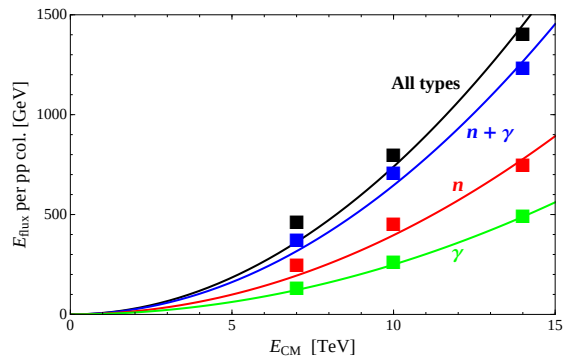

Figure 2: An average energy flux of the particles incident on the TAN surface inside the detector's geometrical aperture. The flux is dominated by neutrons and photons originated from the *pp* collisions. The curves are quadratic fits.

calculate the energy deposition from an individual shower generated by one *pp* collision. The deposited energy in our detector from the shower is used for ionization of Argon gas. A high voltage system collects the image charges of the electrons and then the signal is amplified and shaped. The following equation gives the conversion from the energy deposition in the detector, $E_{\rm dep}$, to the pulse height of the signal, h, in unit of V [13, 14]:

$$h = \frac{1}{2}\frac{E_{\rm dep}}{W_{\rm Ar}}\frac{GA}{B}\,, \qquad (1)$$

where the factor $1/2$ is from that our detector collects the image charges of the electrons, $W_{\rm Ar} = 26$ eV/pairs is referred to as W-function and is the required energy to produce an electron/iron pair in Argon gas, hence $E_{\rm dep}/W_{\rm Ar}$ is the number of produced electron/ion pairs, $G = 0.32$ μV/electron is the amplifier gain, $A = 73\%$ is the cable efficiency, and $B \simeq 2.75$ describes a deficit due to the shaper's finite integration time (*ballistic deficit*) [14]. After substituting these numbers, the factor to convert $E_{\rm dep}$ to h is 1.63 mV/MeV. In this way, we can simulate the signal of our detector for each simulated *pp* collision.

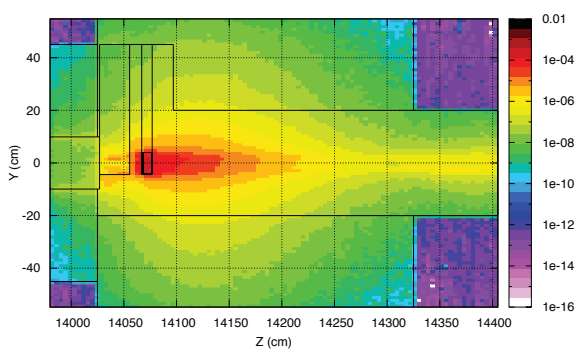

Figure 3: Average energy deposition in a TAN per *pp* collisions simulated by Fluka. The particles produced by the collisions are incident from the left side. The detector is located at $y = 0$ cm and $z = 14070$ cm.

SIMULATION RESULTS

In this section, we discuss results of our simulations for IR5[1]. The following simulations are based on a model with a simpler geometry than than in Fig. 3, which includes the TAN's structure only in front of our detector. For 25,000 simulated *pp* collisions, we simulated the pulse heights of our detectors. Figure 4 shows the efficiency of our detector for the normal events, normalized to per *pp* collision, as a function of a given trigger threshold. The noise level of our detector is about 5 mV [3] and so the trigger level is considered between 20 and 40 mV. The simulation indicates that the efficiency of our detector is between 5% to 10% for the 3.5 TeV beams and between 25% to 30% for the 7 TeV beams. Although the efficiency for the 3.5 TeV beams is smaller than that for 7 TeV beams by a factor of 3-5, it should be large enough for its purpose.

Figure 5 shows the efficiency of our detector for the coincidence events, normalized to per *pp* collision, as a function of a given trigger threshold. The simulation indicates that the efficiency is no more than 1% for the 3.5 TeV beams whereas the efficiency for the 7 TeV beams is on the order of 10%. The difference between 3.5 TeV and 7 TeV beams is about an order of magnitude unlike the case of the normal events.

Our detector cannot resolve the events generated from multiple *pp* collisions in a single bunch crossing. Therefore, when the multiplicity is more than one, we must consider the efficiencies per bunch crossing instead of per *pp* collisions. Suppose p_n is the efficiency of the normal event for one *pp* collision and M is the multiplicity. If we choose a trigger level of 20 mV, $p_n \simeq 10\%$ for the 3.5 TeV beams and $p_n \simeq 30\%$ for the 7 TeV beams from Fig. 4. The efficiency for the normal event modified to per bunch crossing, P_n, is given by

$$P_n = 1 - (1 - p_n)^M\,. \qquad (2)$$

[1]Detectors of the LHCf experiment are inside the TANs of IR1 at present but they will be removed in summer 2010. This changes the showers in the TANs of IR1 and hence we have postponed detail studies of IR1.

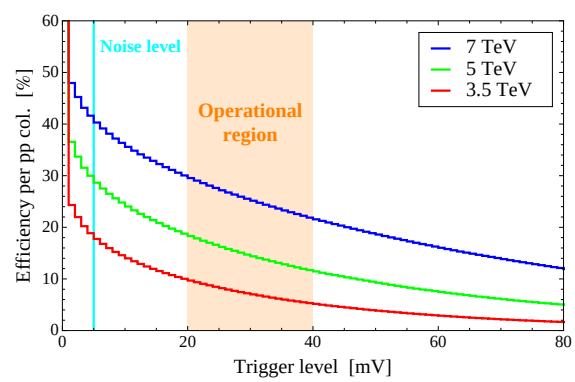

Figure 4: Detector efficiencies for the normal events normalized to per *pp* collision.

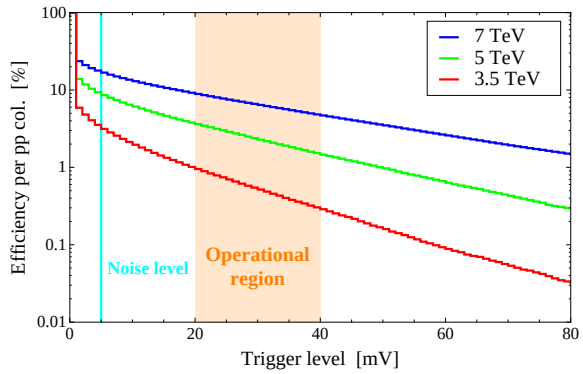

Figure 5: Detector efficiencies for the coincident events normalized to per *pp* collision.

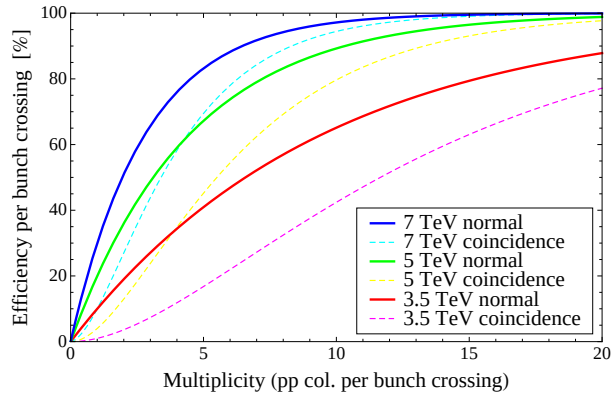

Figure 6: Efficiencies for the normal and coincidence events per bunch crossing vs. multiplicity.

When the multiplicity is more than one, notion of the coincidence is modified since we may have normal events of individual *pp* collisions on both sides. We suppose p_c is the efficiency for the coincidence event for one *pp* collision. From Fig. 5, $p_c \simeq 1\%$ for the 3.5 TeV beams and $p_c \simeq 10\%$ for the 7 TeV beams with the 20 mV trigger level. The efficiency for the coincidence event modified to per bunch crossing, P_c, is given by

$$P_c = 1 - \left[2(1-p_n)^M - (1-2p_n+p_c)^M\right]. \quad (3)$$

We note that P_c depends not only on p_c but also p_n. Figure 6 shows the efficiencies of our detectors for the normal and coincident events per bunch crossing as a function of the multiplicity, calculated from Eqs. 2 and 3 for the trigger level of 20 mV. The efficiencies for one *pp* collisions, p_n and p_c, are from the simulations of Figs. 4 and 5. For the 3.5 TeV beams, the multiplicity is lower than two and the both efficiencies are nowhere near the saturation. Hence, the rate measurements are effective to monitor changes in the *pp* collision rate. Whereas, for the 7 TeV beams, the both efficiencies saturate to 100% when the multiplicity approaches to ten. As discussed previously, in such a case, the observed event rate saturates to the bunch crossing rate and becomes insensitive to changes in the collision rate. Beyond this point, we must use the average signal.

CONCLUSIONS

Argon gas ionization chambers, which detect showers inside the neutral absorbers, are used to measure and optimize the collision rate of the two high luminosity IRs in LHC. Simulations predict that efficiencies of the detectors for the 3.5 TeV beams are about 10% and 1% for one *pp* collision through detecting the normal and coincidence events and those for the 7 TeV beams are about 30% and 10%. Counting measurements are effective for the 3.5 TeV beams where multiplicity does not exceed two. On the contrary, for the 7 TeV beams, the counting measurements become ineffective when the multiplicity approaches ten and we must use the average signal beyond this point.

ACKNOWLEDGMENT

Authors would like to thank to H. Menjo for providing the simulated data of the particle fluxes on the TAN surface and E. Bravin, A. Drees, M. Placidi, and V. Talanov for their supports and useful discussions.

REFERENCES

[1] J. F. Beche *et al.*, "Rad-hard Luminosity Monitoring for the LHC", EPAC'06, MOPLS020, p. 580.

[2] E. Bravin *et al.*, "Collision Rate Monitors for LHC", PAC'07, FRPMN067, p. 4171.

[3] A. Ratti *et al.*, "First Results from the LHC Luminosity Monitor", IPAC'10, MOPEC021, these proceedings,

[4] S. M. White *et al.*, "First Luminosity Scans in the LHC", IPAC'10, MOPEC014, these proceedings.

[5] W. C. Turner *et al.*, "Absorbers for the High Luminosity Insertions of the LHC", EPAC'98, MOP13C, p. 368.

[6] W. C. Turner, "Anticipated Ionization Chamber Luminosity Monitor Performance on RHIC and LHC", LBNL CBP Tech Note 352.

[7] S. M. White and E. Bravin "Fluka Simulations and SPS Measurements for the LHC BRAN", PAC'09, TH5RFP032, to be published.

[8] M. Giovannozzi *et al.*, "Beam Parameters and Machine Performance to be Reached in 2010", LHC Beam Commissioning Workshop, 2010.

[9] S. Roesler *et al.*, "The Monte Carlo event generator DPMJET-III", Monte Carlo 2000 Conference, Lisbon, p. 1033 (2001).

[10] K. Kasahara, "The Users Manual of Epics" (2002), `http://cosmos.n.kanagawa-u.ac.jp/EPICSHome`.

[11] G. Battistoni *et al.*, "The FLUKA code: Description and benchmarking", Hadronic Shower Simulation Workshop 2006, p. 31 (2007); A. Fasso *et al.*, "FLUKA: A multi-particle transport code", CERN-2005-10, INFN/TC_05/11, SLAC-R-77, 2005.

[12] O. Adriani *et al.*, "The LHCf Detector at the CERN Large Hadron Collider", JINST **3**, S08006 (2008).

[13] D. H. Wilkinson, "Ionization Chambers and Counters" (Cambridge University Press, 1955).

[14] P. S. Datte *et al.*, IEEE Trans. Nucl. Sci., Vol. 50, No. 2, p. 258 (2003).