



**BNL-101028-2013-CP**

***Implementation of optics correction  
on the ramp in RHIC***

**C. Liu, A. Marusic, M. Minty**

*Presented at the North American Particle Accelerator Conference (NA-PAC 13)  
Pasadena, CA  
September 29 – October 4, 2013*

**Collider-Accelerator Department  
Brookhaven National Laboratory**

**U.S. Department of Energy  
DOE Office of Science**

Notice: This manuscript has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy. The publisher by accepting the manuscript for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this manuscript, or allow others to do so, for United States Government purposes.

This preprint is intended for publication in a journal or proceedings. Since changes may be made before publication, it may not be cited or reproduced without the author's permission.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

# Implementation of Optics Correction on the Ramp in RHIC\*

C. Liu<sup>†</sup>, A. Marusic, M. Minty, BNL, Upton, NY 11973, USA

## Abstract

In this report we describe and present experimental results from correction of the accelerator optics during acceleration and preparation for collisions at the Relativistic Heavy Ion Collider (RHIC) at BNL. Past experiences with beam optics correction at RHIC have concentrated on measurements and corrections at store beam energies. While well-corrected store beam optics is desirable for maximizing beam and polarization lifetime, well-corrected beam optics during the ramp is also desirable for example to reduce the strength of depolarizing resonances. With optics measurements on the ramp at every 2 or 4 seconds, corrections were computed for several fixed points on the ramp using a well-tested weighted Singular Value Decomposition algorithm. Successful implementation of correction on the second part of the ramp (rotator ramp), together with some observations on the first part of the ramp (the energy ramp) will be presented.

## INTRODUCTION

Analysis of depolarizing resonances on the ramp and dynamic aperture study are part of the ramp optics design nowadays in RHIC [1]. Acceptable intrinsic resonance strength and dynamic aperture are ensured by design. With optics errors, both of the quantities are hard to predict. Most likely the machine performance in both aspects will degrade to some extent with optics errors. Therefore, it is desirable to correct the optics on the ramp for better polarization and intensity transmission efficiencies.

Besides continuous efforts for improving TbT (turn-by-turn) BPM data quality over the years [2], there are two developments in 2013 that make ramp optics correction feasible. One of the development is the precision optics measurement based on ARTUS kicker [3] which is critical for ramp optics analysis. Firing the AC dipole for optics measurement is operational and robust at injection and store energies [4], however, it has not been demonstrated on the ramp. Exciting beam periodically with the ARTUS tune meter kicker has been done previously for the purpose of ramp chromaticity control. However, no successful effort has been applied to extract accurate linear optics information along the ramp. The other development is the successful demonstration of global optics corrections based on both the ARTUS kicker and the AC dipole [5, 6].

## RAMP OPTICS MEASUREMENT

By firing the ARTUS kicker every 2 or 4 seconds on the ramp, TbT BPM data of free betatron oscillation can be recorded in both planes [2]. The timing of oscillations in two planes are shifted by 510 turns to reduce coupling effects. Special care was taken to avoid interference between TbT and average orbit data taking. Option of 1k, 2k and 4k turns TbT orbit are available. The option of 1k is chosen for the ramp optics measurement since usually the oscillation lasts less than 500 turns due to decoherence. Examples of TbT BPM data are shown Fig. 1.

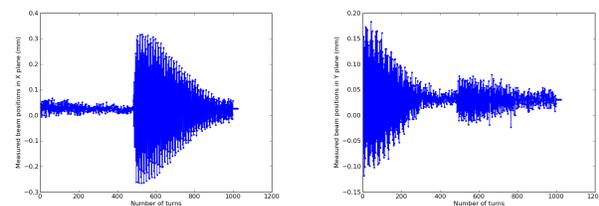


Figure 1: Turn by turn BPM positions in the horizontal (left) and the vertical (right) plane from ramp optics measurement, residual coupling (right) appears in the vertical plane where the horizontal oscillation starts

As an usual optics analysis, beta functions and phase advances are determined for both planes from TbT BPM data. The analysis technique adopted by the author favors the data in the horizontal plane for better measurement resolution [3]. Therefore, the data in the vertical plane was shifted backwards by 500 turns (data after 500 turns being discarded) before windowed FFT being applied, which also reduces the impact of the residual coupling in the vertical plane after  $\sim 500$  turns.

The beta beats and phase errors at 289 s into the ramp are shown in Figs. 2 and 3. The whole ramp takes 320 s. Similar analysis results are available every 4 seconds in Blue ring, every 2 seconds for Yellow ring. The overall trend of the optics errors are similar for both rings. As beam being accelerated, the optics error decreases to its minimum in the middle of the ramp. Then the error goes up as beta stars being squeezed.

## RAMP OPTICS CORRECTION SCHEME

For the polarized proton program at RHIC in 2013, the ramp has two parts. The first one, during which the energy is ramped up and beta stars are squeezed, is called energy ramp. The second ramp, during which the rotator magnet ramps up, is called rotator ramp. There are 32

\*The work was performed under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy.

<sup>†</sup> cliu1@bnl.gov

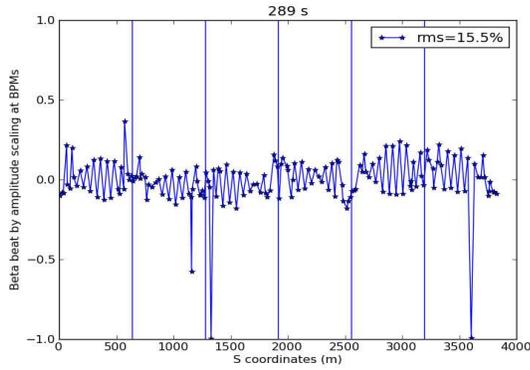


Figure 2: Beta beats at 289 s into ramp in the horizontal plane from ramp optics measurement

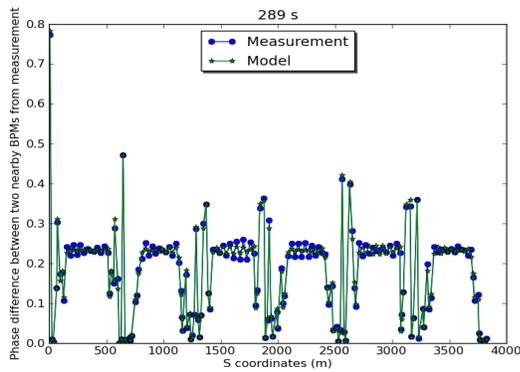


Figure 3: Phase errors at 289 s into ramp in the horizontal plane from ramp optics measurement

fixed points (stepstones) for the energy ramp where magnet strengths are controllable for the energy ramp. Magnet strengths are interpolated between the stepstones. Rotator ramp has fewer stepstones since the optics is smoother.

TbT orbits nearby stepstones are picked for optics analysis for the availability of optics models. Then corrections of the 72 trim quads are calculated based on the principle presented in [5]. Two scripts are designed for ramp optics correction. One of them goes through all the picked orbits for analyzing optics in both planes. The second one implements the corrections in RampEditor for all relevant stepstones. Due to the fact that the beam is not perfectly centered in quadrupoles, the closed orbit will vary with implementation of correction. Therefore, orbit feedback is turned on to keep the orbit stable. Besides that, tune feedback is on as well to avoid beam loss due to resonances. Chromaticity changes due to optics corrections are predicted by the online model (OptiCalc), which is then manually corrected before activation of corrections.

## TEST ON ROTATOR RAMP

The concern regarding ramp optics correction implementation is mostly on the beam loss and beam emittance. As a

test, correction on a rotator ramp with fewer bunches (12 by 12) was attempted to study the effects. The test ramp was the same as a physics ramp except for the fewer bunches. The optics for the rotator ramp is considered as smooth regardless of the ramping of the rotators. Therefore, correction calculated for the full energy were applied to all stepstones of the rotator ramp except the very first one. It means the correction strength ramp up from the first to the second stepstone.

Beam loss of the test ramp and a physics ramp are shown in Fig. 4. The rising of beam loss around 1300 s in the Blue ring was due to other beam study. The observation is that beam loss is slightly better for the test ramp during the rotator ramp and after beam collision. IPM reported

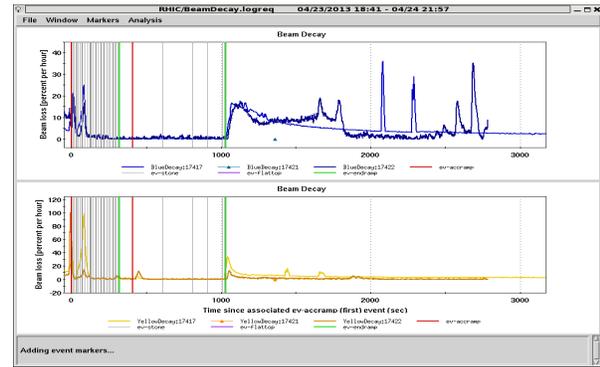


Figure 4: Comparison of beam loss between the test ramp and a physics ramp for both rings

emittance for the test ramp and a physics ramp are shown in Fig. 5. They are similar except for the large error bars due to fewer bunches. Calculated beam emittance from beam collision signals are as good as in a good physics store.

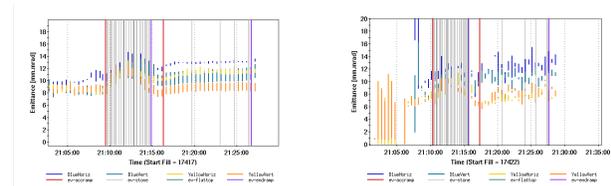


Figure 5: IPM measured emittance in a physics ramp (left) and the test ramp (right) for both rings

Collision rate is expected to reach 1070 kHz at STAR by scaling beam intensities, which is  $\sim 15\%$  increase of luminosity.

The results of the test eliminate the concern of adverse effects of ramp optics correction. Later on, the correction for rotator ramp was implemented operationally for physics program in the Yellow ring only due to other change in the Blue ring. The rest of the program has been running with corrected optics without any complication.

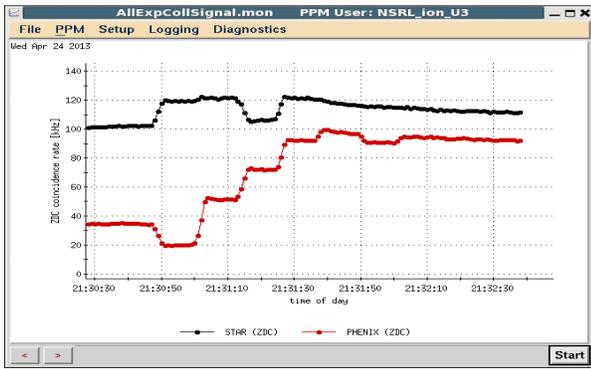


Figure 6: Beam collision signals in the test ramp for both experiments

## TEST ON ENERGY RAMP

Ramp optics correction for the energy ramp has been tested twice in 2013. We run a 12 by 12 ramp for ramp optics measurement first, then run script to select the TBT orbit files near the stepstones and calculate optics corrections, run script to send correction strengths to RampEditor and activate corrections. We were not able to ramp again for ramp optics measurement to verify the correction due to time limitations.

The problem encountered in the first attempt is, each time a set of strengths were sent to a stepstone in RampEditor, the online model recalculates all relevant magnet strengths for the whole ramp which is too time-consuming. The solution is to send all correction strengths for a stepstone once, not separately. The other way around is to fix magnet strengths (anchoring) for the relevant stepstones so interpolation of magnet strengths will not occur after implementing correctons. The two ways are similar because changing strengths for a stepstone would anchor it as well. The problem encountered in the second attempt is, anchoring stepstones changes the current curves for magnets dramatically, which causes magnet exceeding limits. The selected current curves before and after anchoring stepstones are shown in Figs. 7, 8. The ongoing effort is to change the RampManager code so that anchoring stepstones only fix the magnet strengths, but does not change the derivatives of the current curves.

## SUMMARY

Precision analysis of the linear optics based on Tbt BPM data by the ARTUS kicker opened out the possibility of ramp optics measurement at RHIC. Breakthrough of global optics correction added the critical piece for implementing ramp optics correction. Ramp optics correction for the rotator ramp has been implemented operationally at RHIC. Appreciable improvement of luminosity was observed. Ramp optics correction for the energy ramp is in progress.

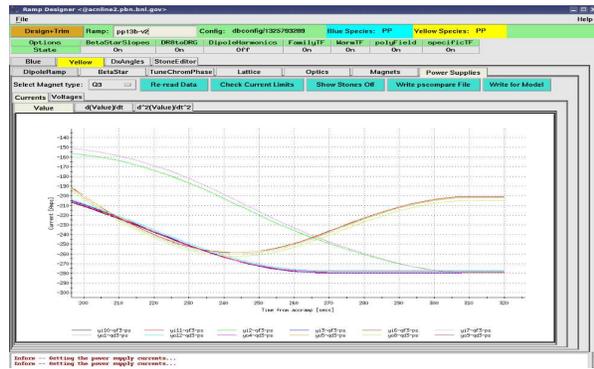


Figure 7: Current curves for selected magnets without ramp optics correction

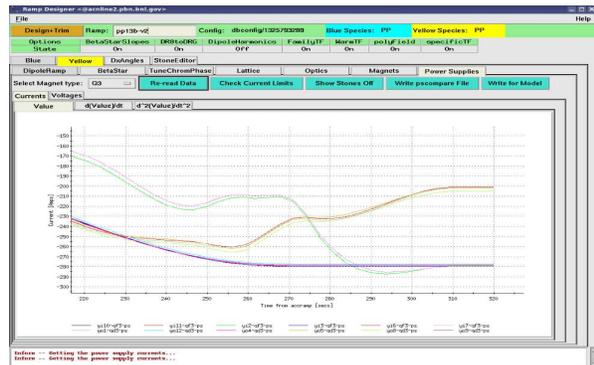


Figure 8: Current curves for selected magnets with ramp optics correction

## ACKNOWLEDGEMENTS

The author would like to thank the RHIC operation crew and the BPM team for their help during the beam study. Special thanks to V. Ranjbar, M. Bai, M. Blaskiewicz, W. Fischer and T. Roser for their support of the work.

## REFERENCES

- [1] V. Ranjbar. Polarization transmission efficiency on ramp. Presented in RHIC retreat 2013, Brookhaven National Lab, Upton, NY, 2013.
- [2] M. Minty et al. Measurement of beam optical functions during acceleration in RHIC. In *these proceedings*.
- [3] C. Liu et al. Precision tune, phase and beta function measurement by frequency analysis in RHIC. In *Proceedings of the International Particle Accelerator Conference, 2013. IPAC 2013*.
- [4] M. Bai et al. Measuring beta function and phase advance in RHIC with an AC dipole. In *Particle Accelerator Conference, 2003. PAC 2003. Proceedings of the*, volume 4, pages 2204–2206. IEEE, 2003.
- [5] C. Liu et al. Global optics correction in RHIC based on turn-by-turn data from ARTUS tune meter. In *these proceedings*.
- [6] X. Shen et al. AC dipole based optics measurement and correction at RHIC. In *these proceedings*.