



BNL-95049-2011-CP

***Lattice design for the future ERL-based electron
hadron colliders eRHIC and LHeC***

**D. Trbojevic, J. Beebe-Wang, Y. Hao, V.N. Litvinenko,
V. Ptitsyn, D. Kayran, N. Tsoupas**

Presented at the 2011 Particle Accelerator Conference (PAC'11)
New York, N.Y.
March 28 – April 1, 2011

Collider-Accelerator Department

Brookhaven National Laboratory

**U.S. Department of Energy
Office of Science**

Notice: This manuscript has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy. The publisher by accepting the manuscript for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this manuscript, or allow others to do so, for United States Government purposes.

This preprint is intended for publication in a journal or proceedings. Since changes may be made before publication, it may not be cited or reproduced without the author's permission.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

LATTICE DESIGN FOR THE FUTURE ERL-BASED ELECTRON HADRON COLLIDERS ERHIC AND LHEC*

D. Trbojevic, J. Beebe-Wang, Y. Hao, V. N. Litvinenko, V. Ptitsyn, D. Kayran, and N. Tsoupas, Brookhaven National Laboratory, Upton, Long Island, New York, 10973-5000

Abstract:

We present a lattice design of a CW Electron Recovery Linacs (ERL) for future electron hadron colliders eRHIC and LHeC. In eRHIC, an six-pass ERL installed in the existing Relativistic Heavy Ion Collider (RHIC) tunnel will collide 5-30 GeV polarized electrons with RHIC's 50-250 (325) GeV polarized protons or 20-100 (130) GeV/u heavy ions. In LHeC a stand-alone, 3-pass 60 GeV CW ERL will collide polarized electrons with 7 TeV protons. After collision, electron beam energy is recovered and electrons are dumped at low energy. Two superconducting linacs are located in the two straight sections in both ERLs. The multiple arcs are made of Flexible Momentum Compaction lattice (FMC) allowing adjustable momentum compaction for electrons with different energies. The multiple arcs, placed above each other, are matched to the two linac's straight sections with splitters and combiners.

INTRODUCTION

Use of ERL in the electron-ion colliders has multiple advantages: they allow higher luminosities with electron energy recovery. It would be extremely difficult to dump 30 GeV electron beam after collisions into solid-state targets. After collisions, electron energy is reduced down to their initial value, by multiple passes through the linacs at the negative side of the sinusoidal RF voltage. The electron energy in the dump is equal to the injection value. The time of flight of electrons is the most important parameter in this process allowing them to reach the sinusoidal voltage function at the right time:

$$L_p = -\frac{dL}{dp} = M_{5,6}, \quad [1]$$

With the $M_{5,6}$ is defined from:

$$X_{out} = M X_{in}, \quad X = (x, x', y, y', -ds, \frac{\delta p}{p}, 1). \quad [2]$$

The recirculation passes should be isochronous to provide complete energy recovery for off-momentum electrons and to relax the tolerances on RF system. To ensure the isochronous condition the lattice has to be flexible to adjustments of R_{56} (or M_{56}) parameter, if needed. The equation of the longitudinal synchrotron motion is:

$$\frac{\delta T}{T_o} = \left(\alpha - \frac{1}{\gamma^2} \right) \frac{\delta p}{p} \quad [3]$$

Where γ is the relativistic factor, and α is the momentum compaction:

$$\alpha = \frac{1}{\gamma_T^2} \approx \frac{1}{C_o} \sum_i \bar{D}_i \theta_i, \quad [4]$$

where γ_T is the transition energy, θ_i is a bending angle of the dipole "i", \bar{D}_i is average dispersion through the dipole "i", and the C_o is the circumference of the accelerator. A lattice design method to avoid the transition crossing where the momentum compaction $\alpha < 0$ had been previously presented [1]. To produce $M_{5,6} \approx 0$ can be achieved if the total horizontal dispersion through dipoles has negative value: $\sum_i D_i \theta_i \approx 0$. The method is best explained by the Floquet transformation and "normalized dispersion" function [2].

$$\chi = \frac{D_x}{\sqrt{\beta_x}} \text{ and } \xi = D'_x \sqrt{\beta_x} + \frac{\alpha_x D_x}{\sqrt{\beta_x}}, \quad [5]$$

where a vector $\xi = D'_x \sqrt{\beta}$ or $\xi = \theta \sqrt{\beta}$ represents the dipole effect on the dispersion function. These vectors need to be equally distributed on the ξ axis making the overall sum equal to zero or $M_{5,6} = 0$. The normalized dispersion space for the eRHIC arc basic module is shown in Fig. 1.

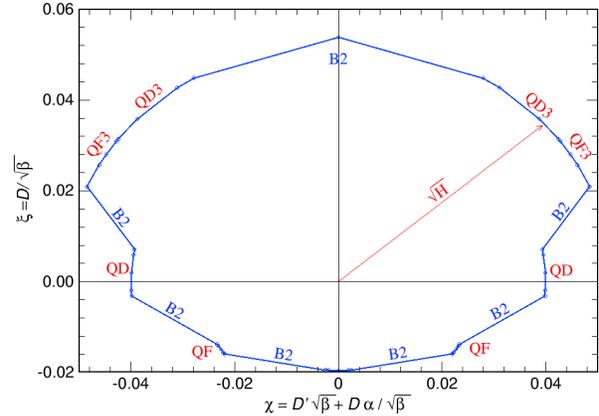


Figure 1: The normalized dispersion space for the basic module of the eRHIC arc. The B2 dipole vectors $\chi = \theta \sqrt{\beta}$ shown are placed symmetrically with respect to the zero of the ξ axis making for the presented module the momentum compaction equal to zero ($\alpha=0$).

ERL COLLIDERS PARAMETERS

The lattice design for the future LHeC and eRHIC has the same arc structure and multiple passes. The LHeC design is a racetrack with two linacs placed at opposite sides in the zero dispersion straight sections with three arcs placed above each other connected to the linacs by the splitters and combiners. The eRHIC magnets are placed inside of the existing RHIC tunnel. The arcs follow the shape of the tunnel while the two linacs are in the 10 and 2 o'clock straight sections. The synchrotron radiation in the arcs presents significant concern. An average radius of the arcs for the LHeC is 1000 m, while the eRHIC average tunnel radius is 381.23 m. Geometry of arc lattice

needs to follow the average radius. The basic cell of the arc lattice is the same for both LHeC and eRHIC. It has one and a half FODO cells on both sides and two doublet quadrupoles for a “ π ” flip in phase of the dispersion function in the middle. It has strong focusing, good compaction, low values of betatron and dispersion functions, and tunable momentum compaction. Tuning is achieved by the doublet quadrupoles. The LHeC electron-proton collider will collide 90% polarized electrons with energy of 60 GeV and protons presently at 7 GeV, with expected luminosity of $1 \times 10^{33} \text{ cm}^{-2} \text{ s}^{-1}$. Other LHeC parameters are shown in Table 1. The eRHIC should provide collisions between polarized electrons with maximum energy of 30 GeV and 320 GeV polarized protons or heavy ions with a maximum luminosity of $1.5 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$, at electron energy of 20 GeV and proton energy at 320 GeV. Six arcs in the eRHIC collider, are assumed to be vertically above each other with the same arc elements, but with scaled down with energies of magnet excitations.

Table 1: Lepton Beam parameters for LHeC

Electron energy at IP [GeV]	60
Luminosity [$10^{33} \text{ cm}^{-2} \text{ s}^{-1}$]	1.01
Polarization (%)	90
Bunch population [10^9]	2.0
e- bunch length [μm]	300
Bunch interval [ns]	50
Transverse emittance. $\gamma\epsilon_{x,y}$ [μm]	50
Rms IP beam size [μm]	7
Hourglass reduction H_{hg}	0.91
Crossing angle θ_c	0
Repetition rate [Hz]	CW
Average current [mA]	6.6
ER efficiency η	94
Total wall power [MW]	100

The eRHIC will collide polarized proton and ^3He beams, and heavy ions with the polarized electrons. The eRHIC beam parameters are shown in Table 2:

Table 2: Beam parameters for eRHIC

	Protons	Electrons
Energy [GeV]	325	20
#of bunches/bunch freq. MHz	166	14.08
Bunch intensity $\times 10^{11}$	2.0	0.22
Bunch charge [nC]	32	3.5
Beam current [mA]	415	50
Rms normalized emittance $\mu\text{m rad}$	0.18	20
Rms emittance nm rad	0.52	0.52
β^* [cm]	5	5
Beam-beam parameter/disruption	0.015	27.1
Rms bunch length [cm]	4.9	0.2
Polarization [%]	70	80
Luminosity $\times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$		1.5

Connections to the two linacs are provided with spreaders or mergers at the ends of the arcs.

LHEC ARC LATTICE

A 180-degree arc (with average radius of 1000 m) consists of 113 asynchronous arc cells 27.8 m long. The filling factor in this lattice is 69.7%, the bending radius is 697 m and the maximum bending field is 0.287 T in the 60 GeV arc. The arc contains 782 dipoles and 1017 quadrupoles. Four quadrupole families are fed in series. The synchrotron radiation integrals [3] for the 360-degrees are as follows: $I_1 = 0.190 \cdot 10^{-1}$, $I_2 = 0.891 \cdot 10^{-2}$, $I_3 = 0.126 \cdot 10^{-4}$, $I_4 = 0.38 \cdot 10^{-7}$, $I_5 = 0.103 \cdot 10^{-7}$. The horizontal normalized emittance growth, during the acceleration of the beam to 60 GeV, is 8.59 $\mu\text{m rad}$ and its RMS energy spread adds 15.98 MeV. The total normalized emittance growth from the moment of injection to its ejection measures 36.53 $\mu\text{m rad}$. The rms energy spread adds to 35.24 MeV, i.e. the beam is ejected with 11.7% energy spread. The betatron functions and dispersion in the basic arc module of the LHeC are shown in Fig. 2.

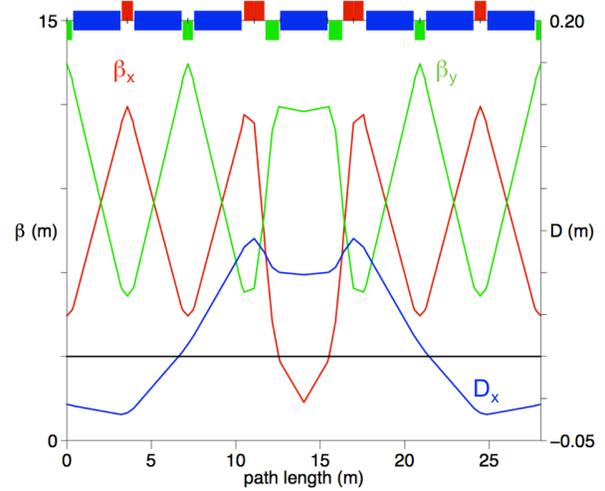


Figure 2: Betatron and dispersion functions in the basic LHeC arc cell.

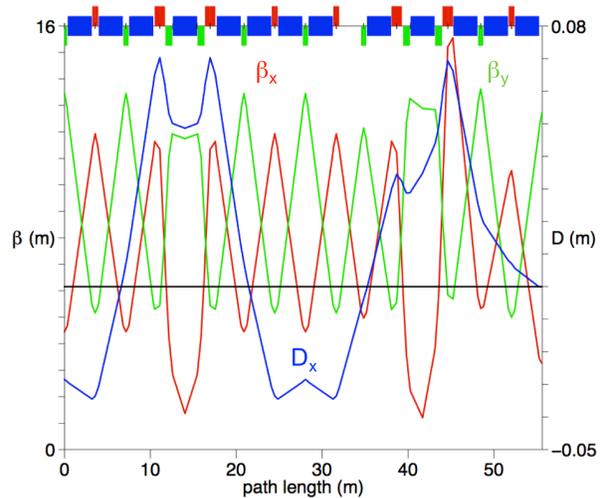


Figure 3: The achromatic LHeC cell at the end of arc.

